

Storage water heater 5 litres S5-U / SNT



Application areas

Single point supply:

- > Kitchen sink
- > Washbasin





Ihr Online-Fachhändler für:

- Kostenlose und individuelle Beratung
- Hochwertige Produkte
- Kostenloser und schneller Versand
- TOP Bewertungen
- Exzelerter Kundenservice
- Über 20 Jahre Erfahrung



E-Mail: info@unidomo.de | Tel.: 04621 - 30 60 89 0 | www.unidomo.de

Storage water heater 5 litres

S5-U / SNT

Product information



Energy efficiency class **A** (Scale: A+ to F)

S5-U / SNT (undersink model with open-outlet tap)

Part number:	4100-42055
Content [litres]:	5
Type:	vented
Water connections (thread connections):	G 3/8"
Temperature range [°C]:	approx. 35 – 85
approx. mixed water amount 40 °C at 65 °C ¹⁾ [litres]:	9.1
Nominal power rating (kW):	2.0
Supply voltage [V]:	1~ / N / PE 230 V AC
Heating time $\Delta t = 55 \text{ K}$ ²⁾ [min]:	10
Standby power consumption at 65 °C [kWh / 24h]:	0.27
Internal tank:	plastic
Function indicator:	✓
Temperature limit adjustable to ... [°C]:	38 / 55 / 65
Protection class:	IP 24
Dimensions (height × width × depth) [cm]:	37.6 × 25.6 × 22.8
Power cable:	 with plug
approx. weight filled with water [kg]:	8.5

1) At an inlet temperature of 12 °C 2) Temperature increase e.g. from 10 °C to 65 °C

Description

- > Vented 5-litre storage water heater (undersink model) for hot water supply at a single point-of-use with matching two-handle-mixer tap, temperature selection on the left, water volume selection on the right
- > Temperature control approx. 35 °C bis 85 °C with available energy-saver range and optional temperature limitation at 38 °C, 55 °C or 65 °C
- > Can only be used with a special open-outlet tap for vented hot water heaters
- > Safety temperature limiter as dry-run protection
- > Internal tank of polypropylene with recyclable, thermal insulation
- > High-quality insulation keeps heat losses at a minimum
- > Automatic frost protection
- > Power cable with plug, length: ≤ 65 cm


Storage water heater 5 litres
S5-U / SNT
Installation




Example of an **open-outlet** installation

Assembly and operating instructions must be observed upon installation.

Measurements in mm

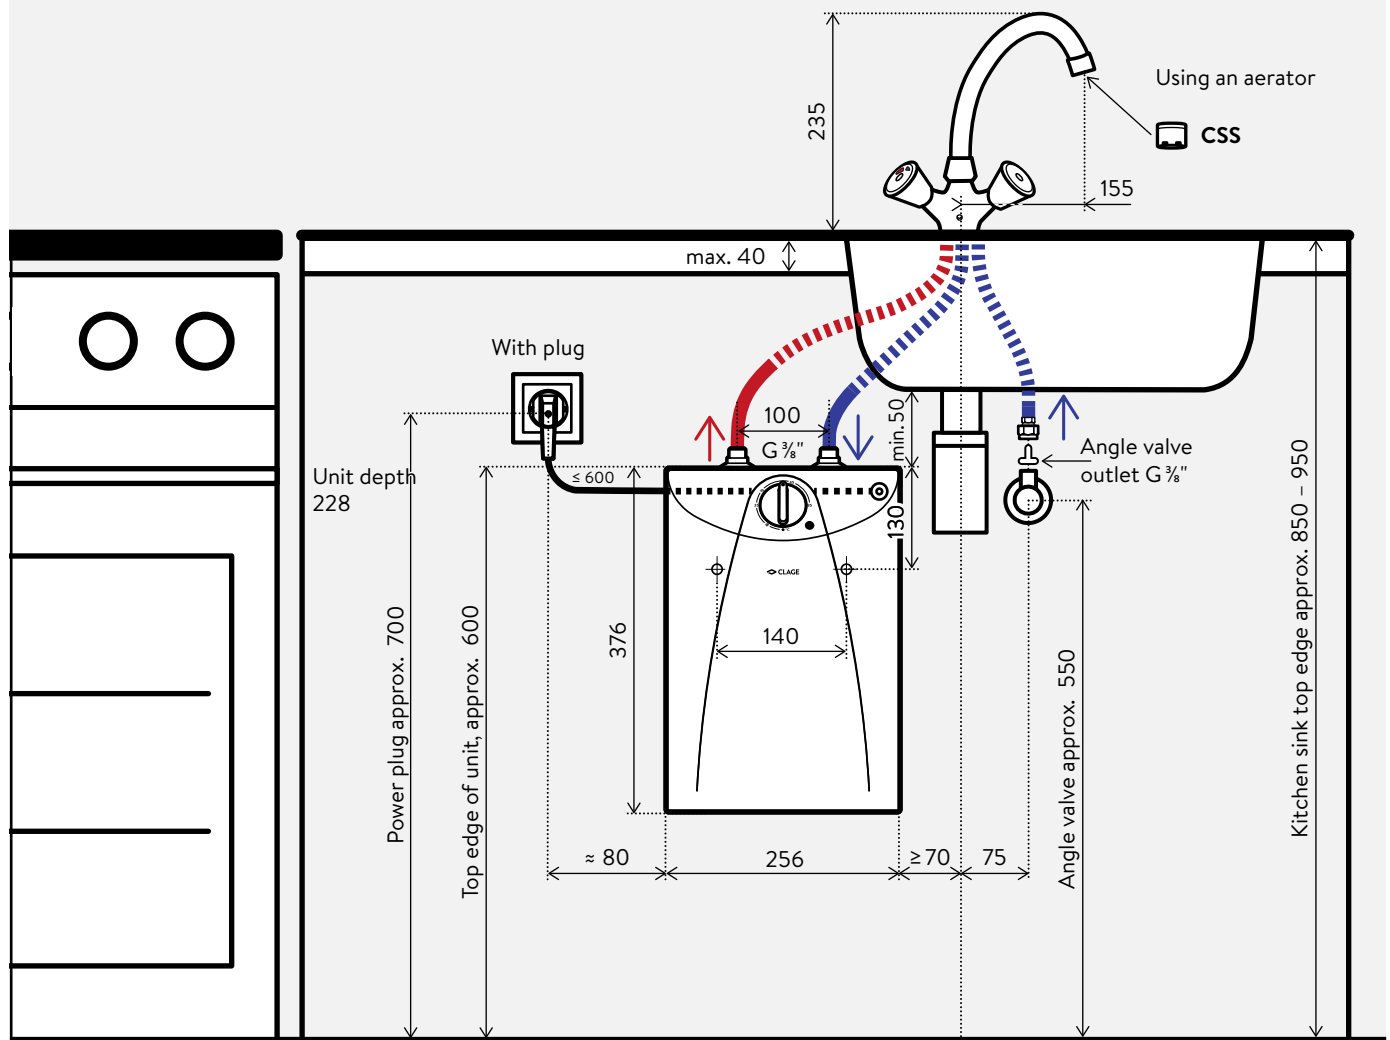

Side view:

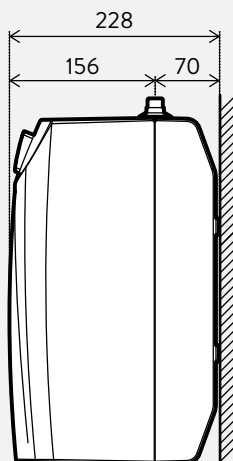

Storage water heater 5 litres

S5-U / SNT

Accessories



SNT (included)

Two-handle temperature control mixer tap for open-outlet installation, temperature selection on the left, water volume adjustment on the right, with swivel spout 15.5 cm

SNT: Part no. 4100-0210



Aerators (optional)

Aerator insert for tap adapter M22/24 at the tap

CSS: Part no. 0010-00504



Aerator with chrome tap adapter M22i
(suitable for taps with male threads at the outlet)

CSSi: Part no. 89125