


DB-CO | D-SetCO

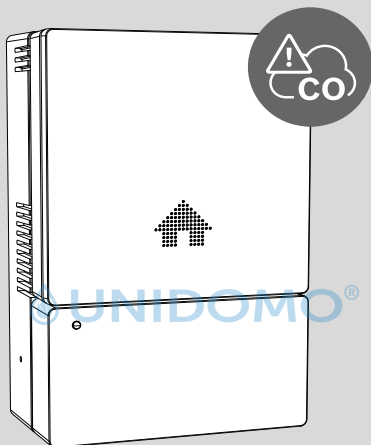

GS818

A 95 mm

B 95 mm

C 25 mm

D 96 mm

E 146 mm

F 53 mm

 NO: 10A | NC: 5A
NO: 250V AC / 28V DC
NC: 250V AC

 345 g

 Type A (with D-CO, CO-M)


 10 y

 -10 ... 45 °C

 25 ... 95 RH%

 ~230VAC, 40 mA
50 Hz, 0.8W

 ≥85 dB@3m

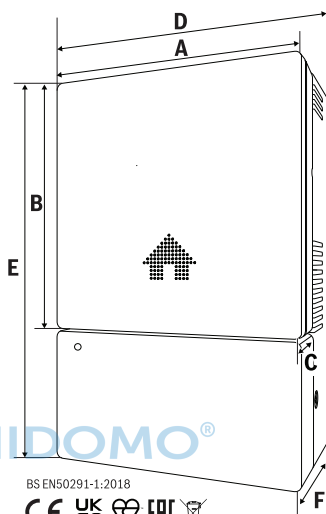


BS EN50291-1:2018


CE UKCA


EAC


KIM16830

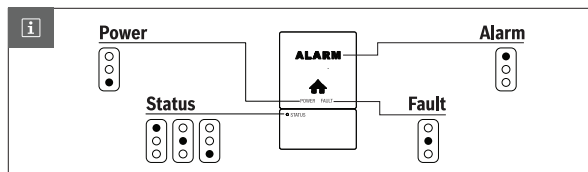

0010043184-002

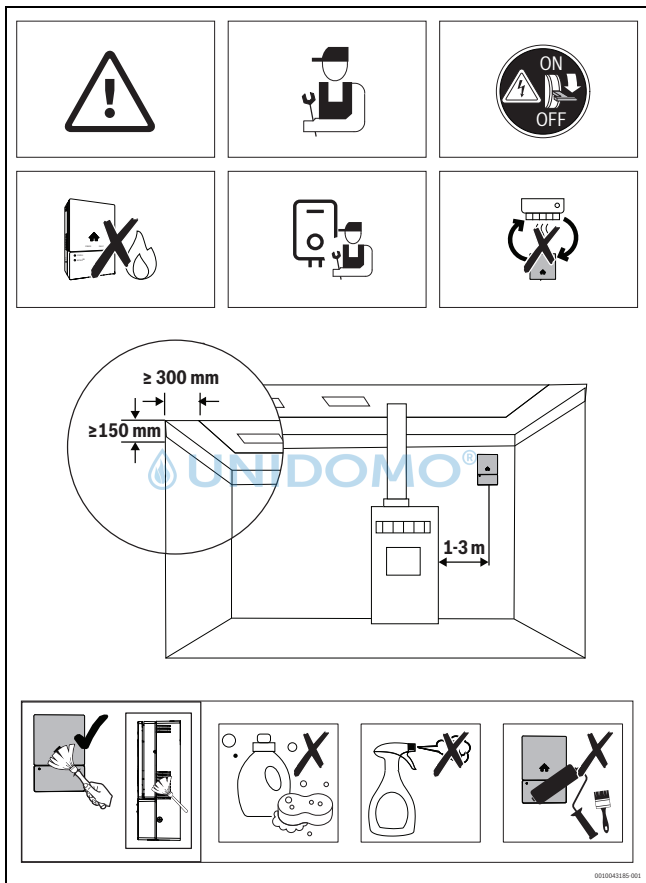


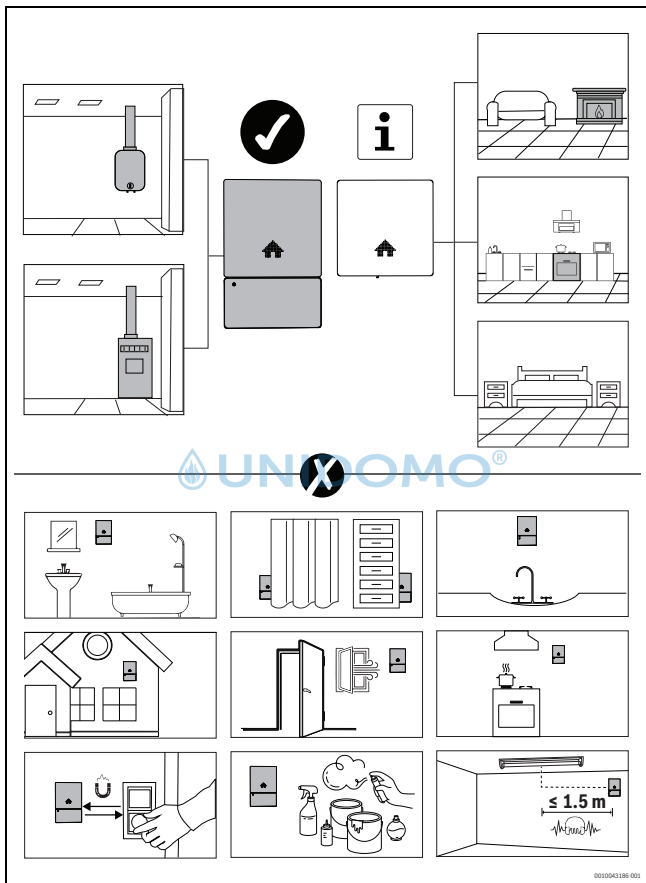

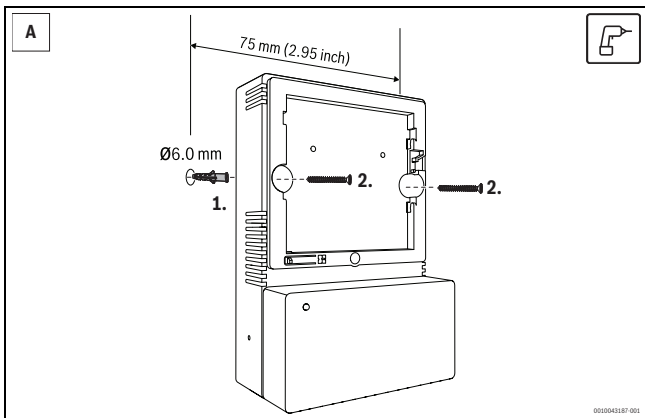


4

UNIDOMO®

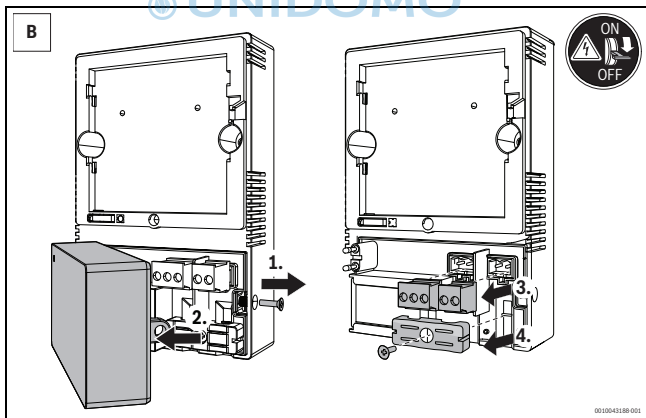


5

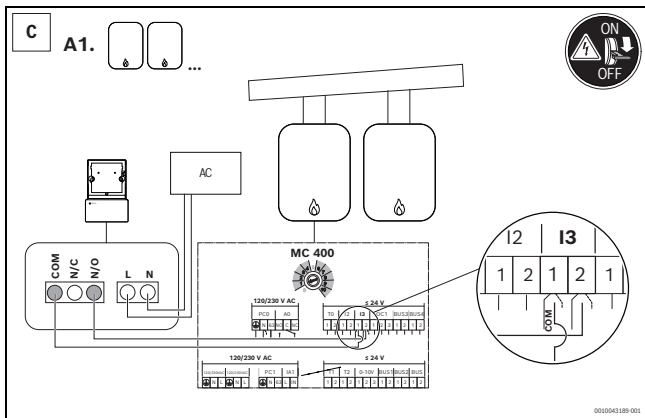


6



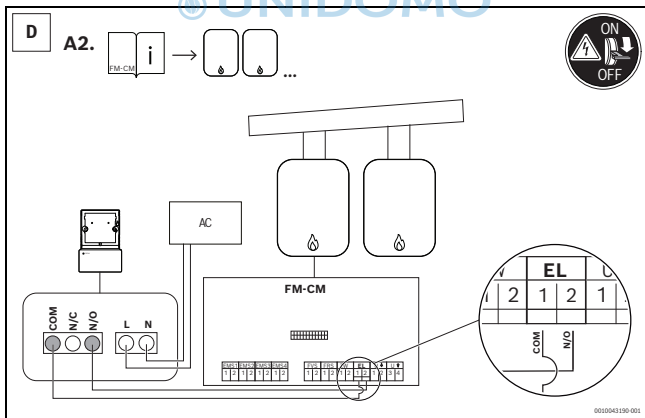


7

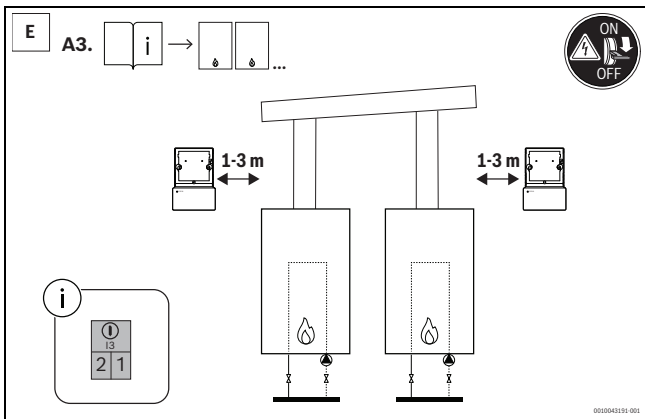


8



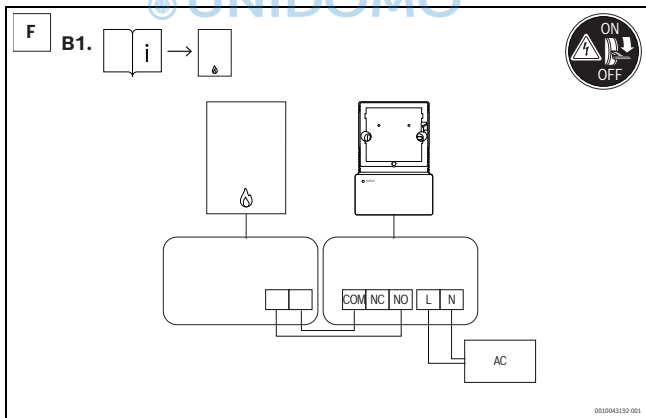


9

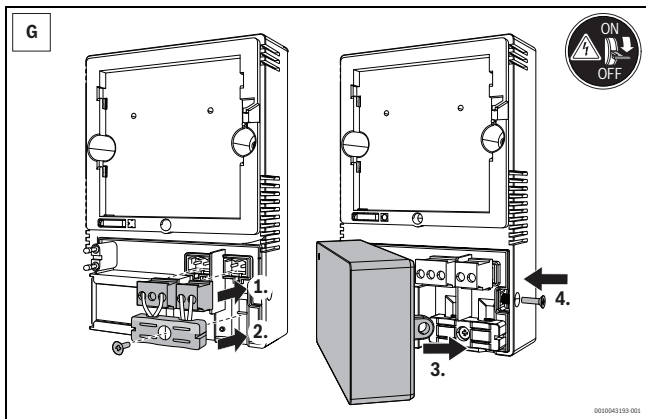


10

UNIDOMO®

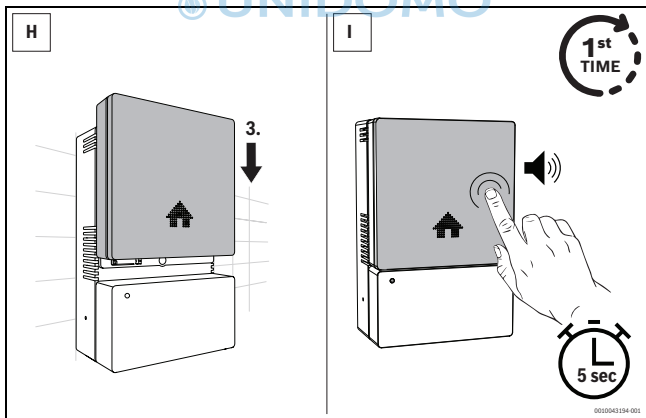


11

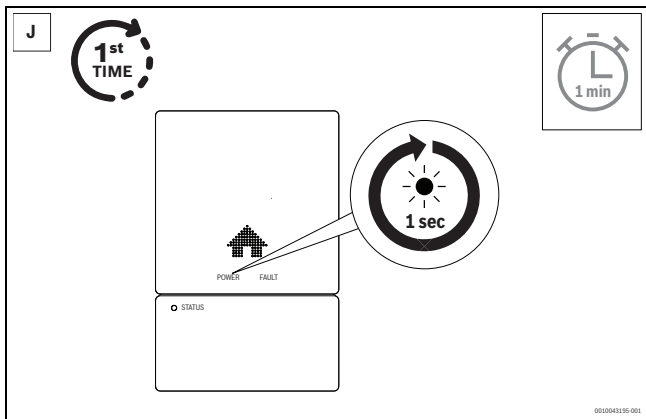


12

UNIDOMO®

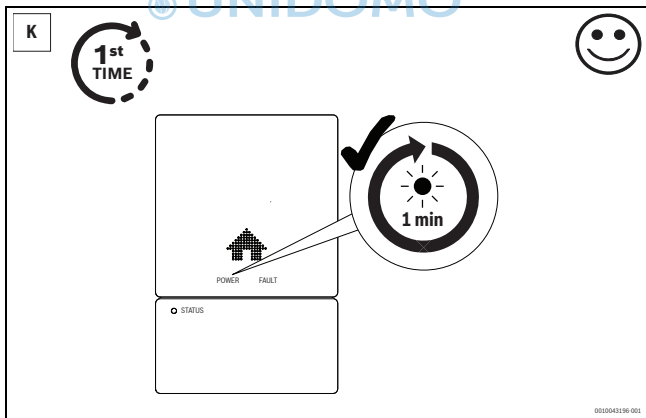


13

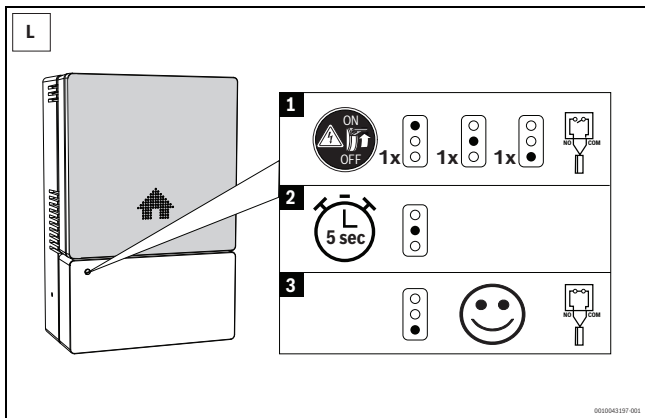



14

UNIDOMO®

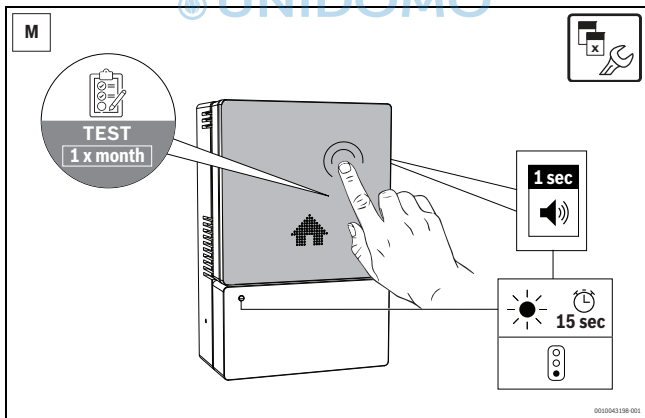


15

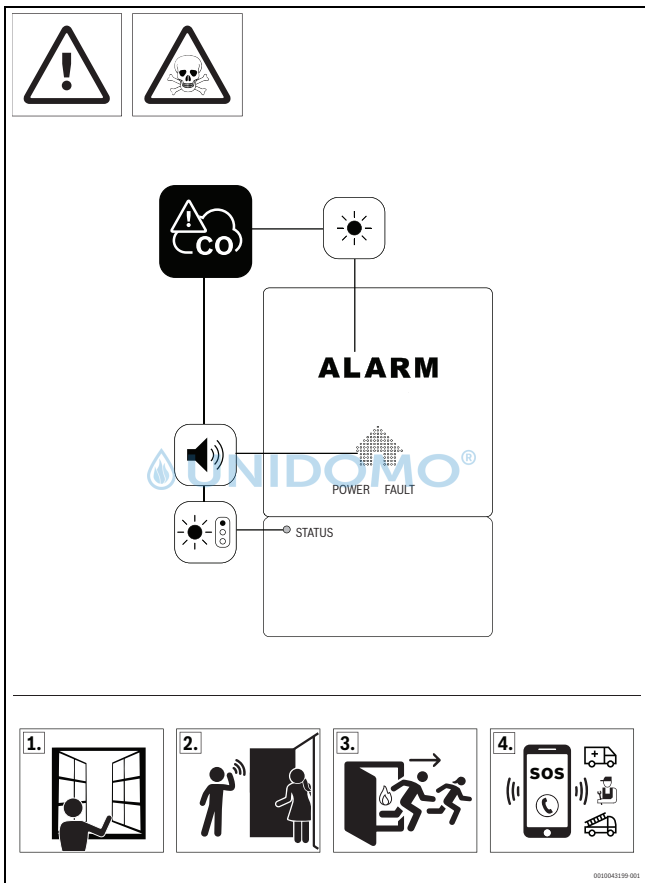

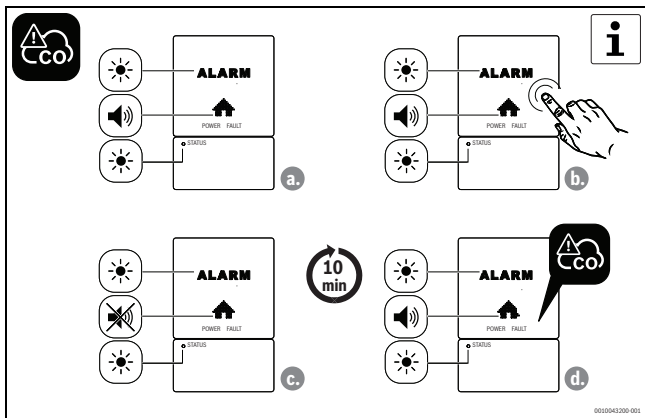


17


UNIDOMO®

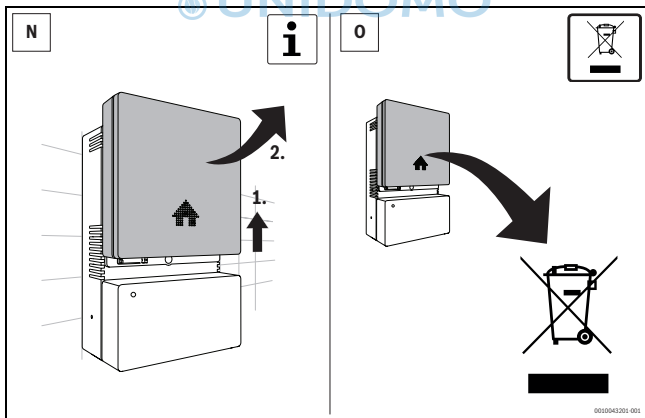


18

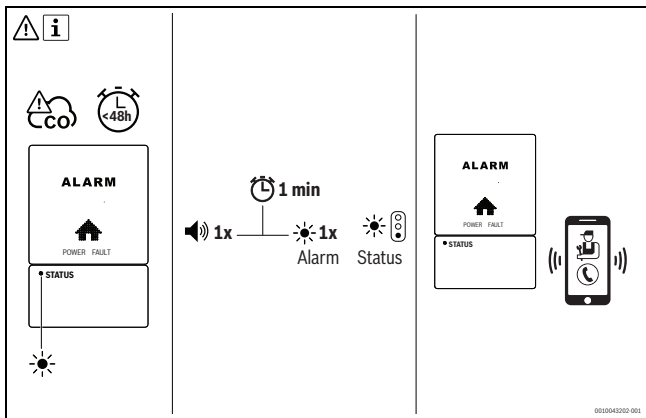

19

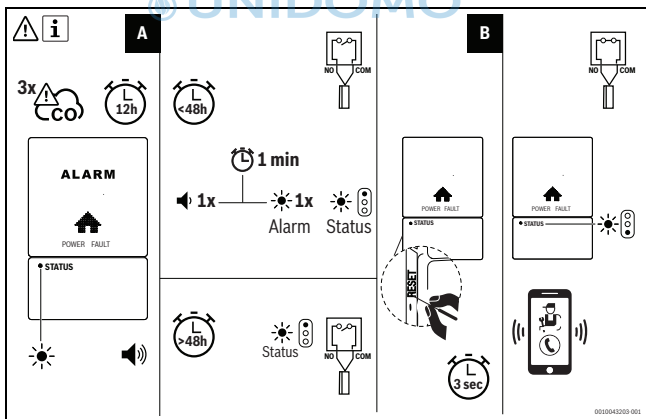

20

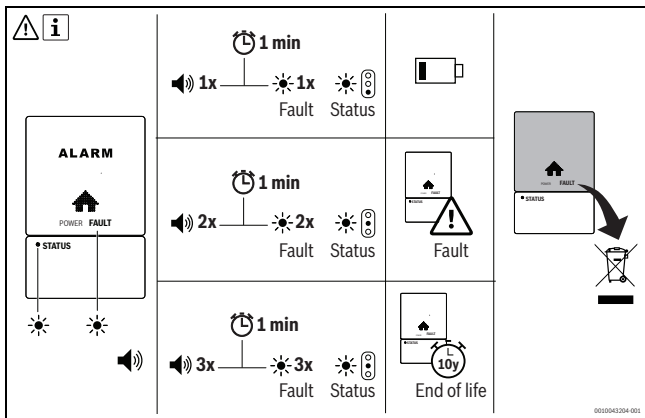

21

 UNIDOMO®





Original Quality by
Bosch Thermotechnik GmbH
Sophienstraße 30-32
D-35576 Wetzlar/Germany

Importer

Bosch Thermotechnology Ltd.
Cotswold Way, Warndon
Worcester WR4 9SW
United Kingdom