

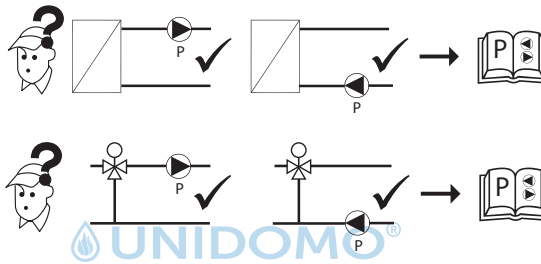

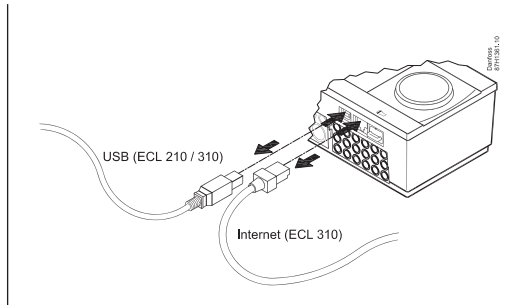


Installation Guide

ECL Comfort 210 / 296 / 310, A260 (code no. 087H3801)



A260.1, ex. a.

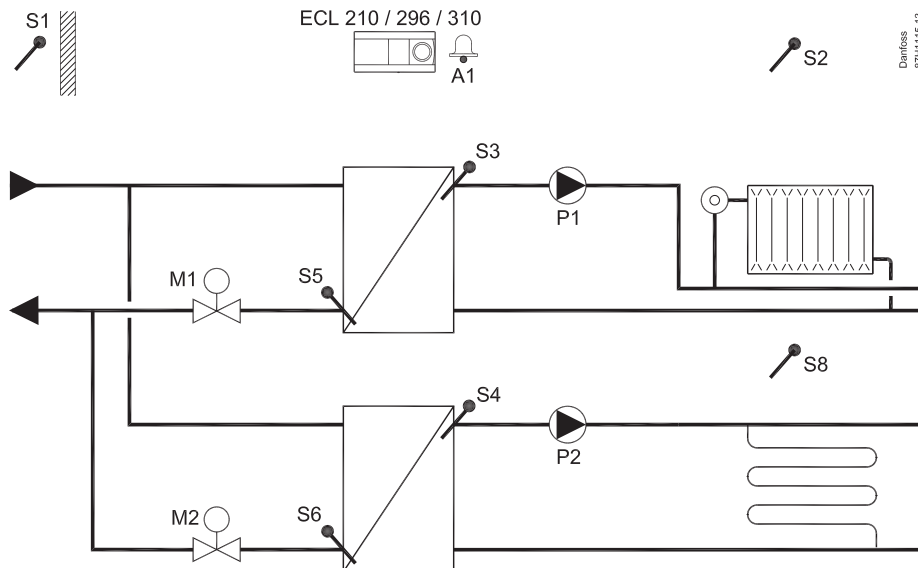



Web: www.unidomo.de

Telefon: 04621- 30 60 89 0

Mail: info@unidomo.com

Öffnungszeiten: Mo.-Fr. 8:00-17:00 Uhr

VIESSMANN



 **Vaillant**

WOLF

 **JUNKERS**  **BOSCH**

 **remeha**

 **DAIKIN**


ROTEX
a member of DAIKIN group




-  Individuelle Beratung
-  Kostenloser Versand
-  Hochwertige Produkte

-  Komplettpakete
-  Über 15 Jahre Erfahrung
-  Markenhersteller


A260.1, ex. b:

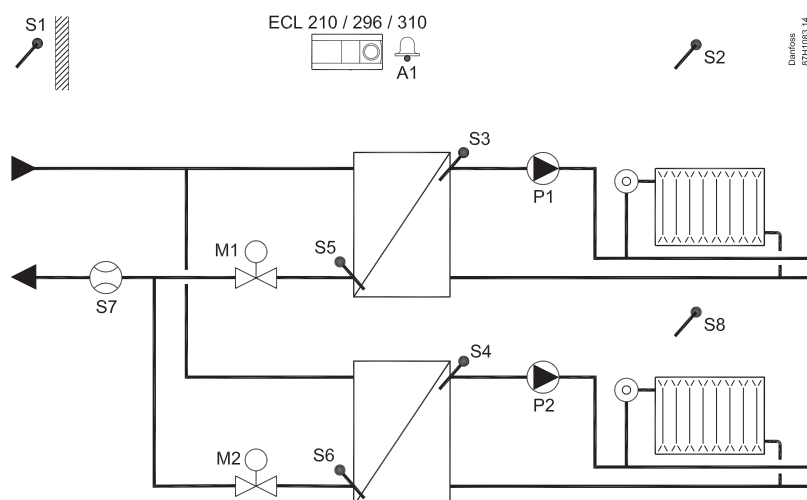


A260.1, ex. c:

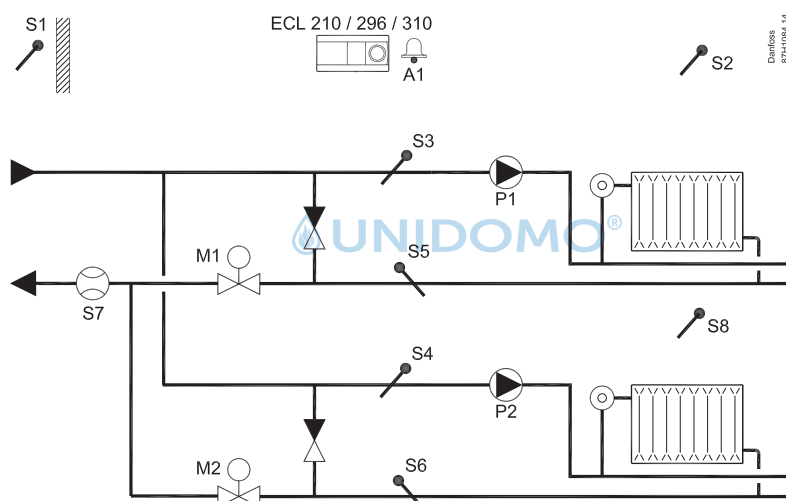


A260.1, ex. d:

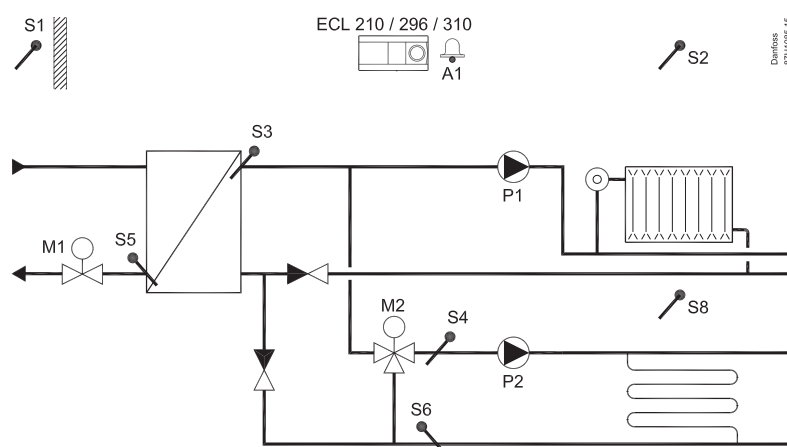

A260.1, ex. e:

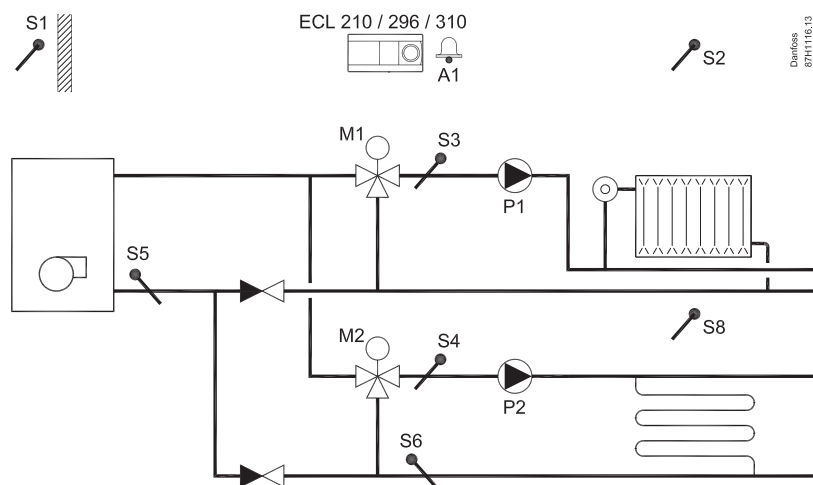


A260.1, ex. f:

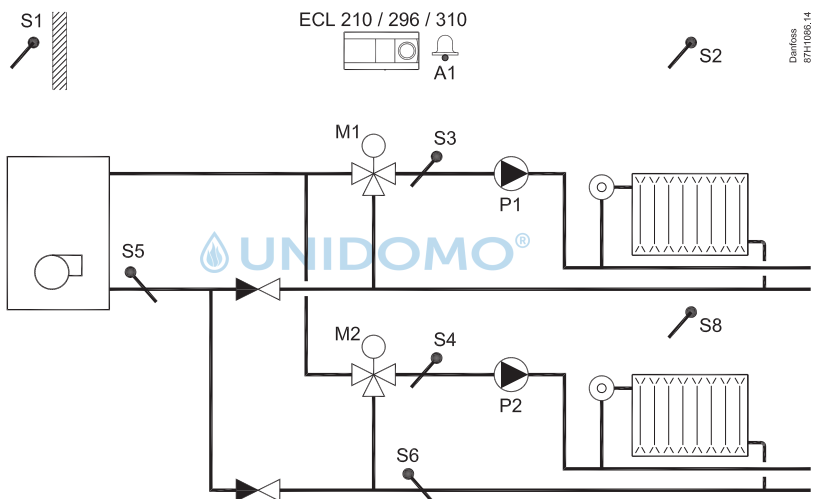


**ECL Comfort 210 / 296 / 310:
230 V a.c.**

R	4 (2) A / 230 V a.c.
R	
Tr	0,2 A / 230 V a.c.




Installation Guide, ECL Comfort 210 / 296 / 310, A260

230 V a.c.

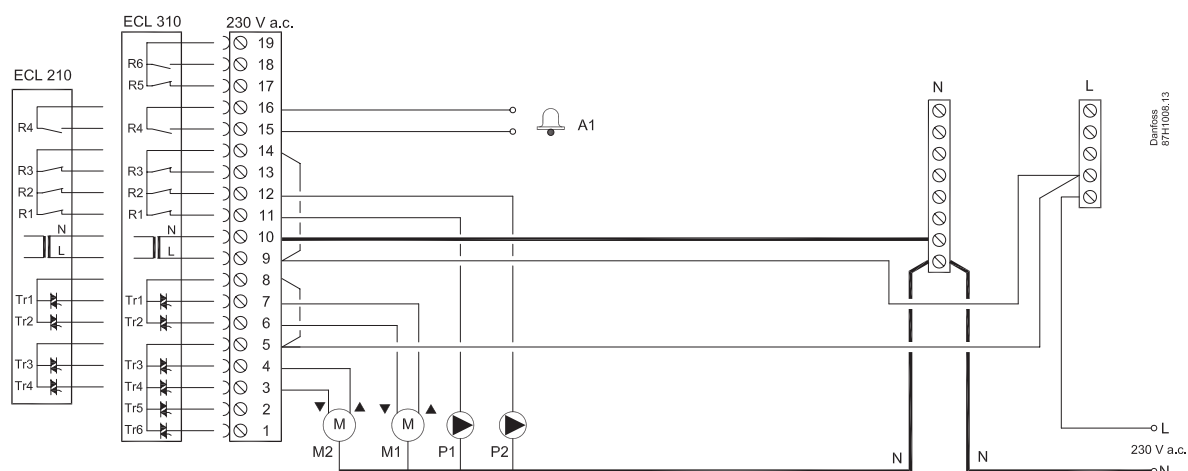


230 V a.c.

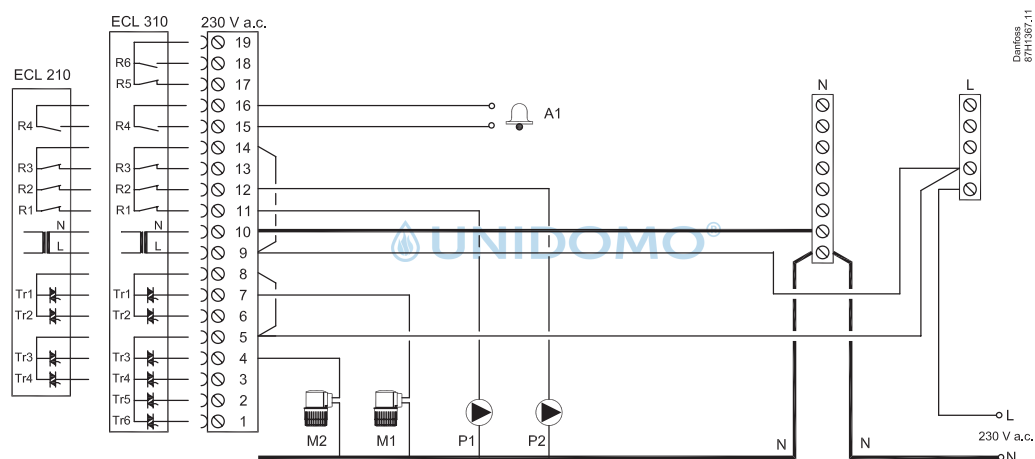


230 V a.c. / 24 V a.c., safety thermostat

1-step closing

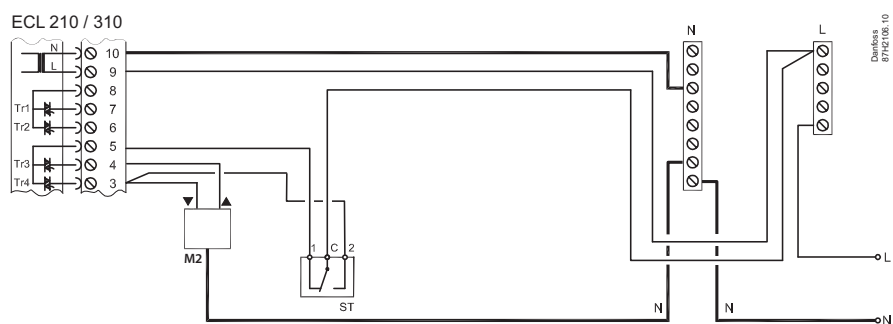


230 V a.c. / 24 V a.c., safety thermostat

1-step closing

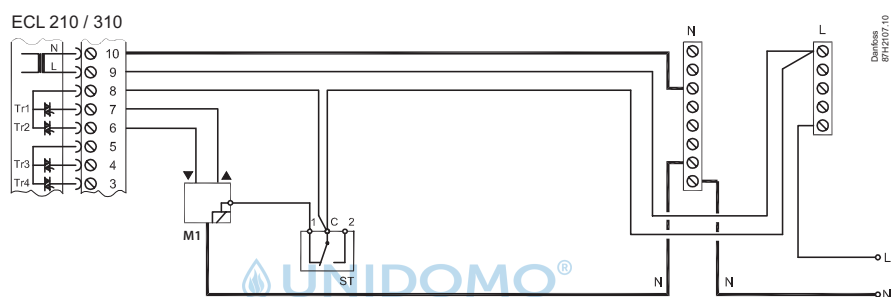

230 V a.c. / 24 V a.c., safety thermostat


1-step closing

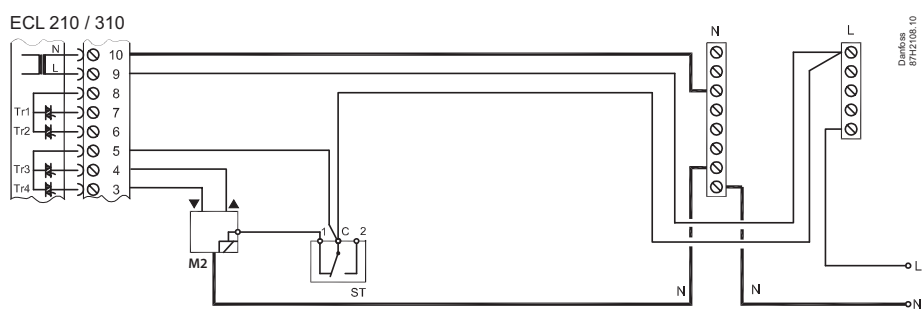

Installation Guide, ECL Comfort 210 / 296 / 310, A260


230 V a.c. / 24 V a.c. , safety thermostat

2-step closing

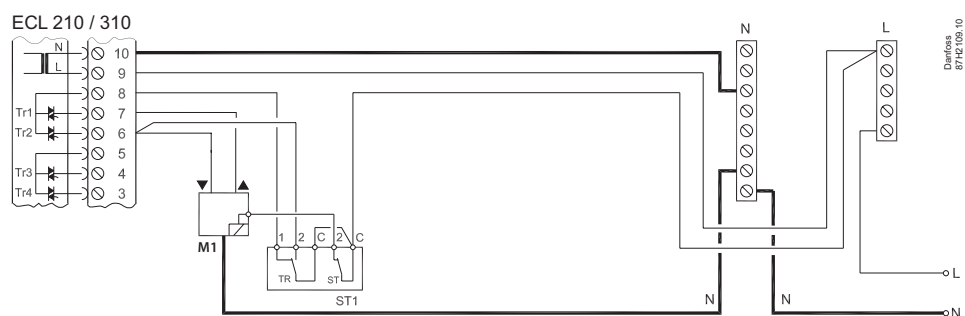

230 V a.c. / 24 V a.c. , safety thermostat

2-step closing

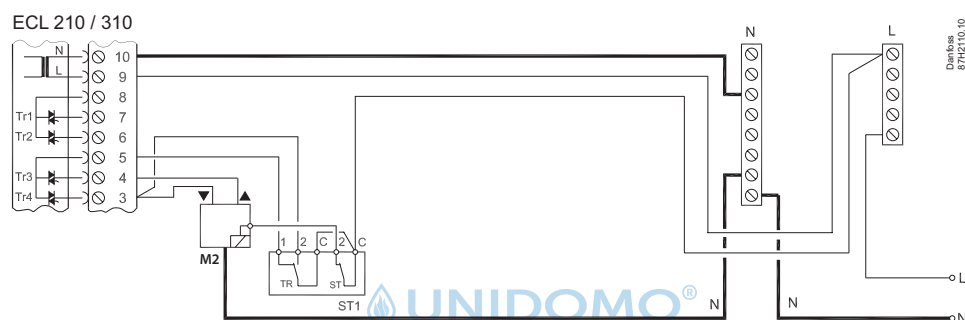


ECL Comfort 210 / 296 / 310:


24 V a.c.

R		4 (2) A / 24 V a.c.
R		
Tr		1 A / 24 V a.c.

24 V a.c.

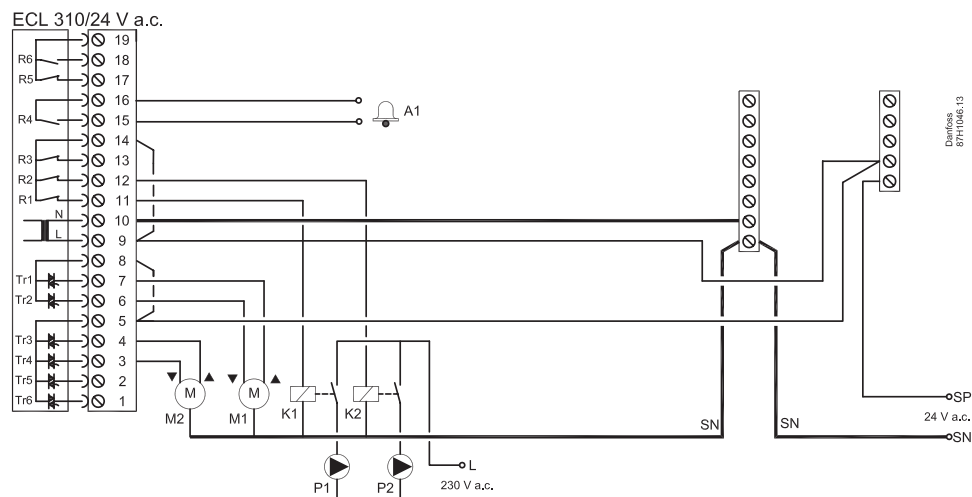


230 V a.c.

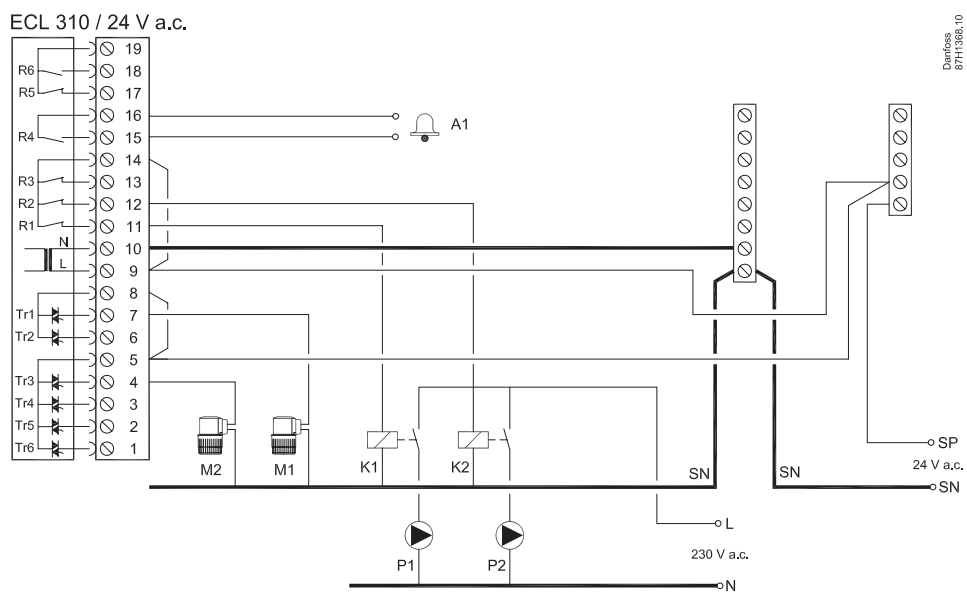


UNIDOMO®

Installation Guide, ECL Comfort 210 / 296 / 310, A260


 **Pt 1000** (1000 Ω / 0 °C)

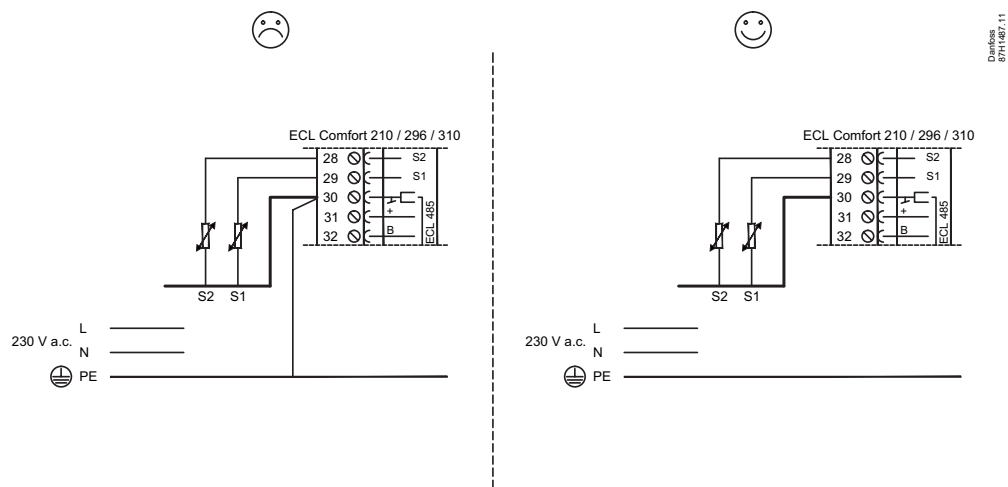

A260.1

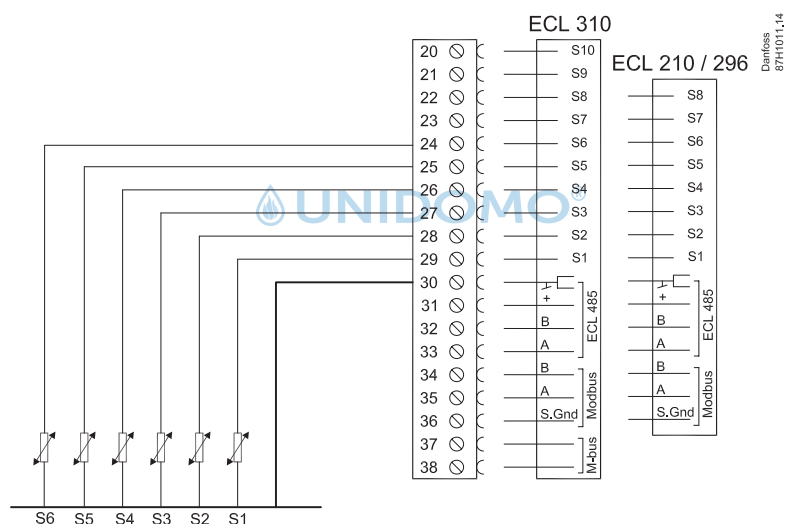

S7

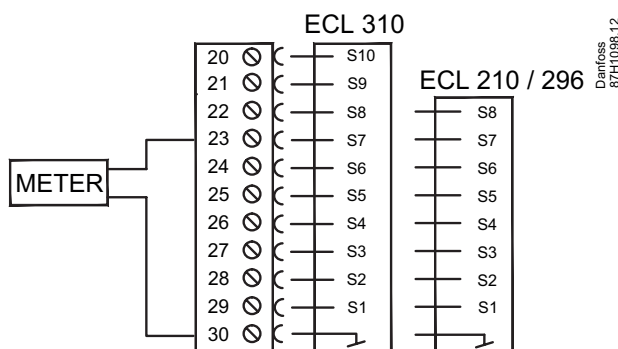

A260.1




S7




A / B ?

A:



Danfoss
87H1457.10


B:



Danfoss
87H1458.10




A:

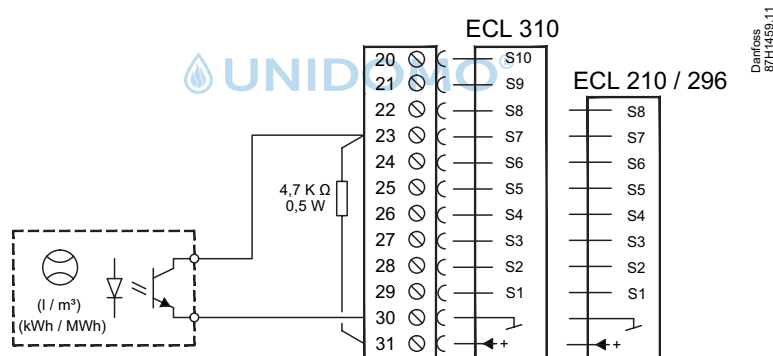



Danfoss
87H1459.11

B:

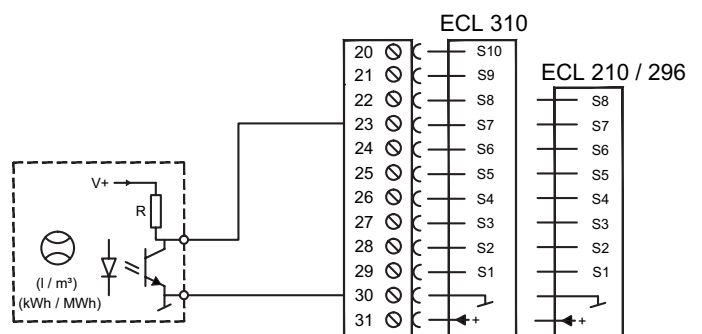


Danfoss
87H1460.11


ECA 30 / 31

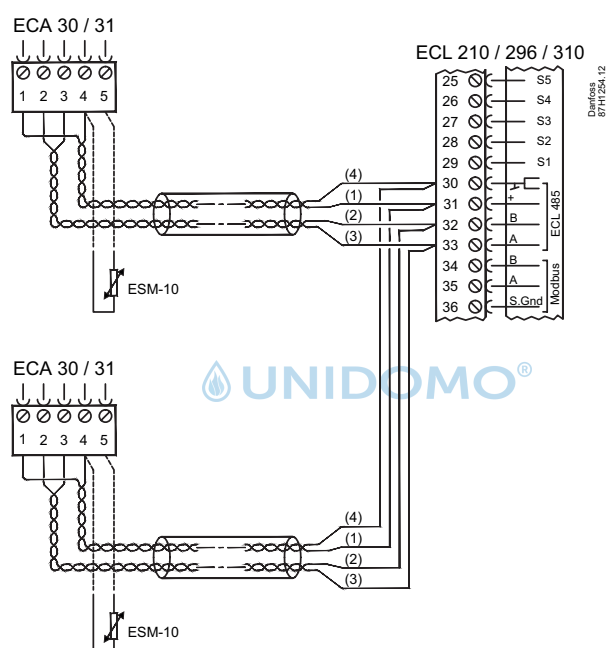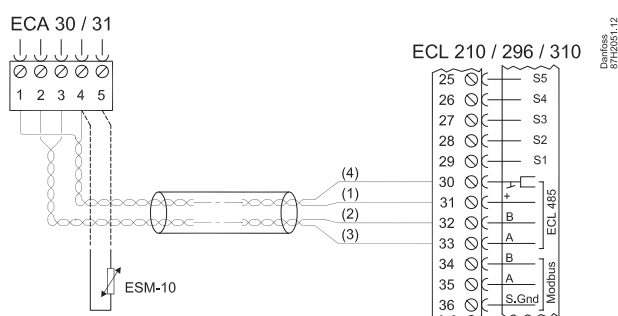


Master / slave

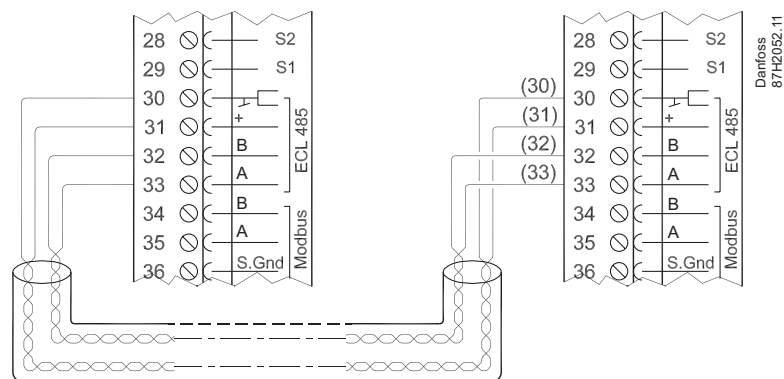


Modbus

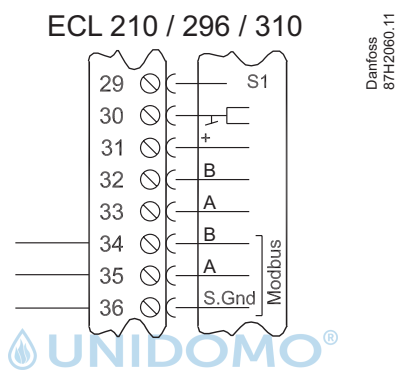



M-bus

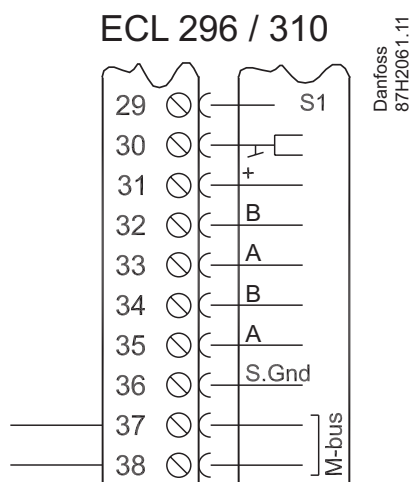

M-bus

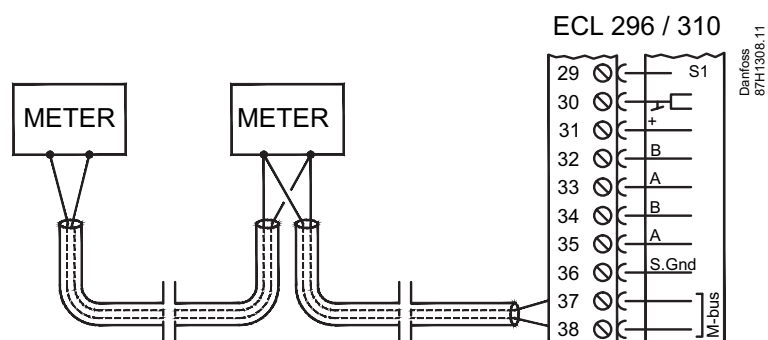


Pt 1000 (IEC 751B, 1000 Ω / 0 °C)

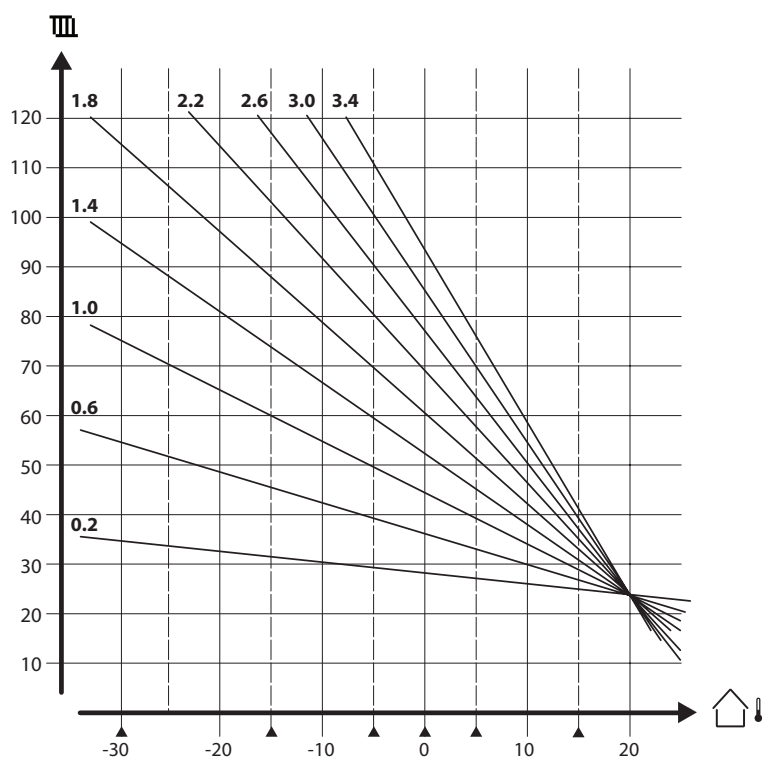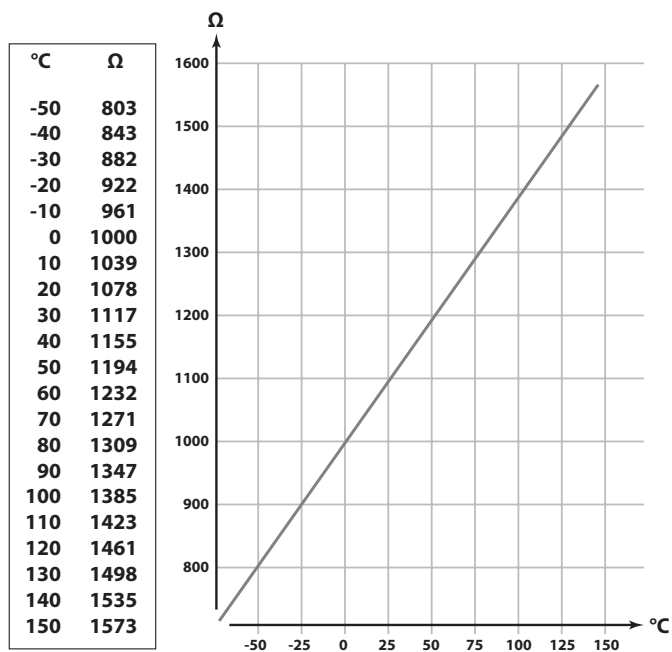


ECA 30


1

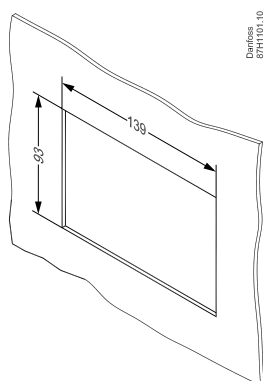


2

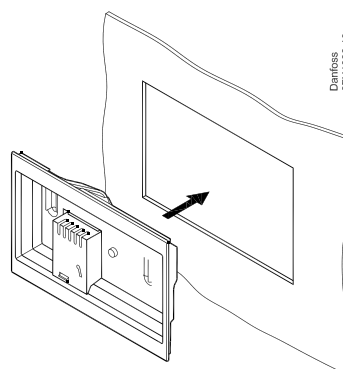

3

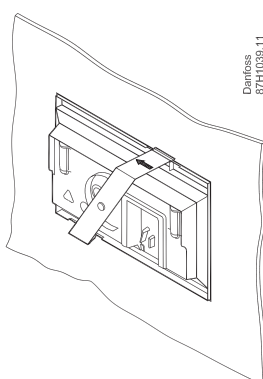


4

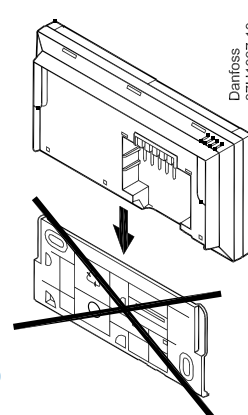


UNIDOMO®


5

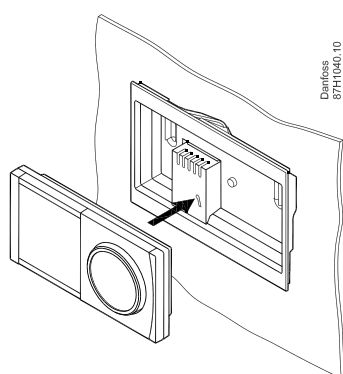


6

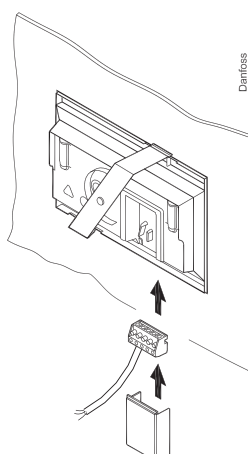

7

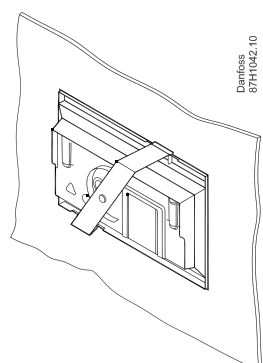

8

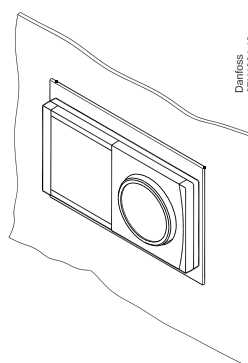





Web: www.unidomo.de

Telefon: 04621- 30 60 89 0

Mail: info@unidomo.com

Öffnungszeiten: Mo.-Fr. 8:00-17:00 Uhr

VIESSMANN



 **Vaillant**

WOLF

 **JUNKERS**  **BOSCH**

 **remeha**

 **DAIKIN**

ROTEX
a member of DAIKIN group



Individuelle Beratung



Kostenloser Versand



Hochwertige Produkte



Komplettpakete







Über 15 Jahre Erfahrung



Markenhersteller

Installation Guide, ECL Comfort 210 / 296 / 310, A260

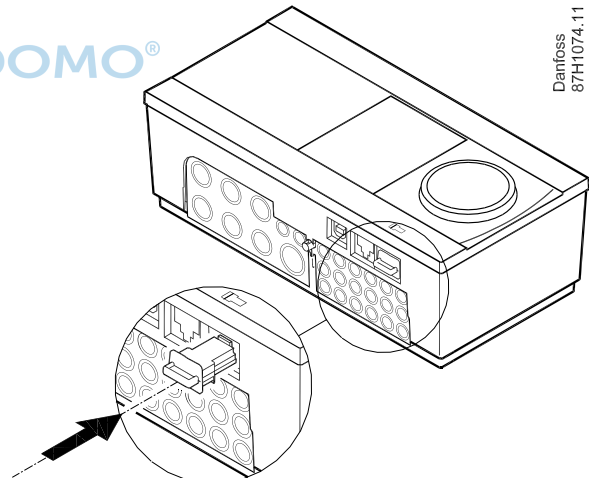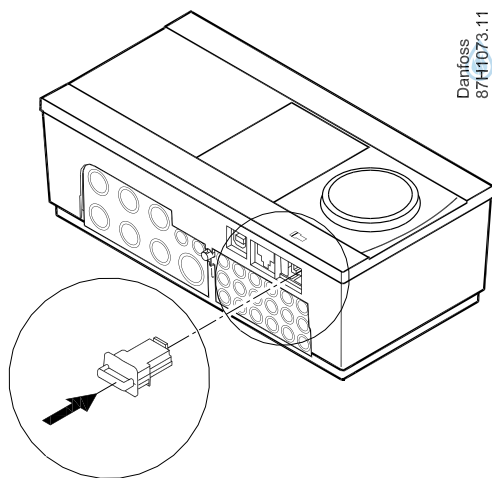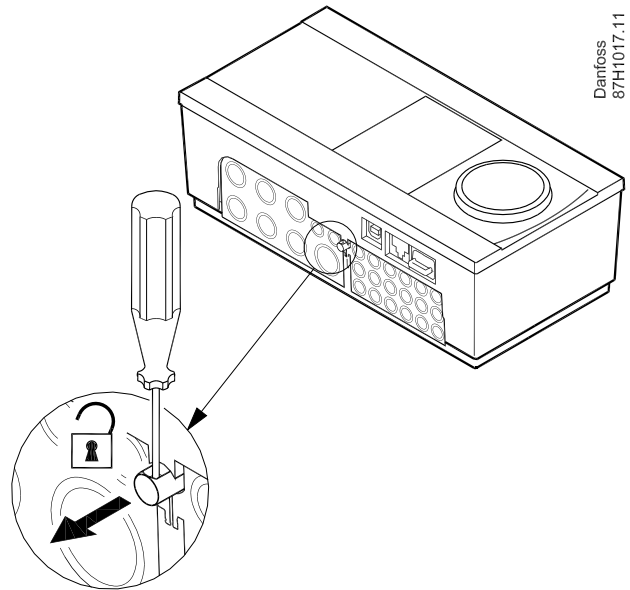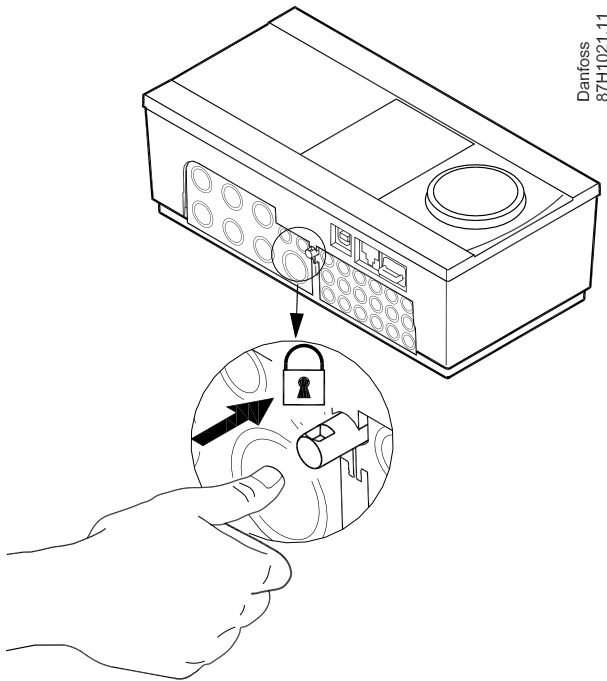

?  **ECL Comfort 210 / 296 / 310, A260: www.heating.danfoss.com**

Danfoss A/S

Heating Segment • heating.danfoss.com • +45 7488 2222 • E-Mail: heating@danfoss.com

Danfoss can accept no responsibility for possible errors in catalogues, brochures and other printed material. Danfoss reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequential changes being necessary in specifications already agreed. All trademarks in this material are property of the respective companies. Danfoss and all Danfoss logotypes are trademarks of Danfoss A/S. All rights reserved.

