

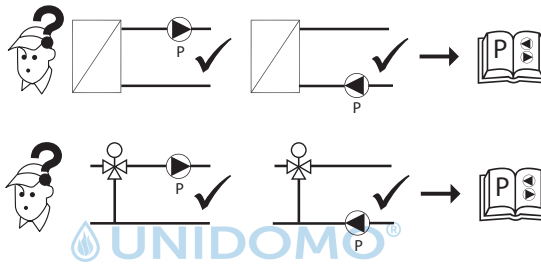
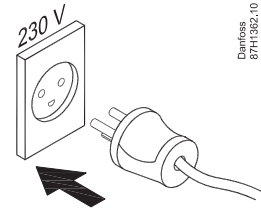


Installation Guide

ECL Comfort 210 / 296 / 310, A275 / A375 (code no. 087H3814)

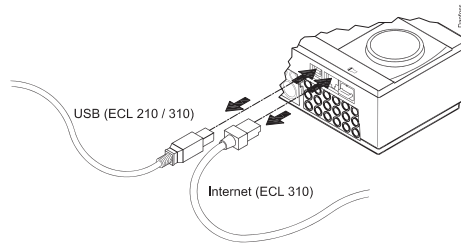


A275.1 (ex. a):

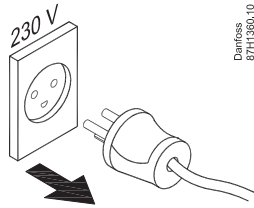

ECL 210 / 296 / 310



Danfoss
87H163.13

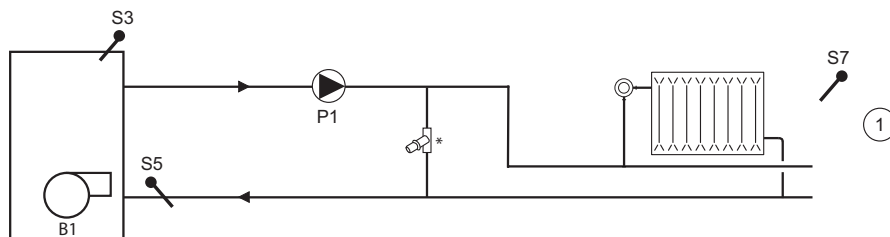



Web: www.unidomo.de

Telefon: 04621- 30 60 89 0

Mail: info@unidomo.com

Öffnungszeiten: Mo.-Fr. 8:00-17:00 Uhr

VIESSMANN



 **Vaillant**

WOLF

 **JUNKERS**  **BOSCH**

 **remeha**

 **DAIKIN**


ROTEX
a member of DAIKIN group




-  Individuelle Beratung
-  Kostenloser Versand
-  Hochwertige Produkte

-  Komplettpakete
-  Über 15 Jahre Erfahrung
-  Markenhersteller


A275.1 (ex. b):

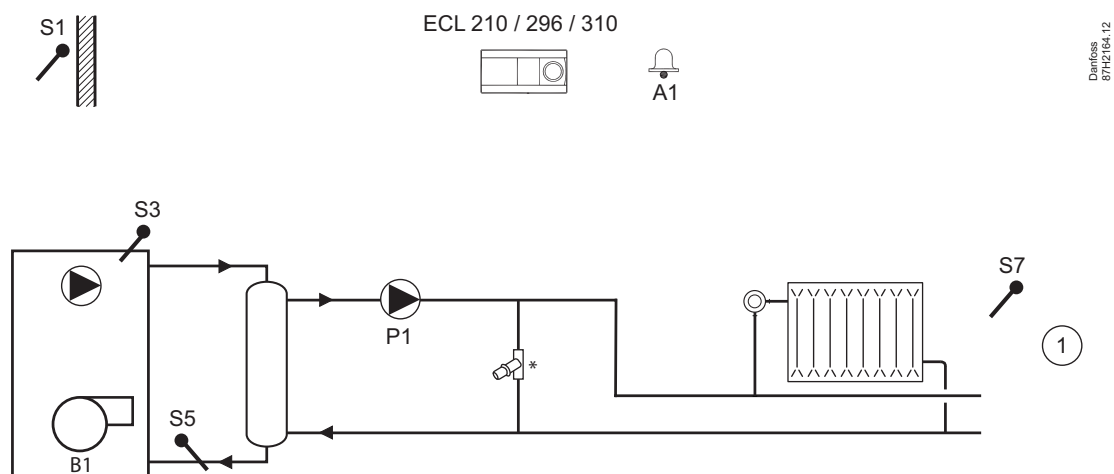


A275.2 (ex. a):

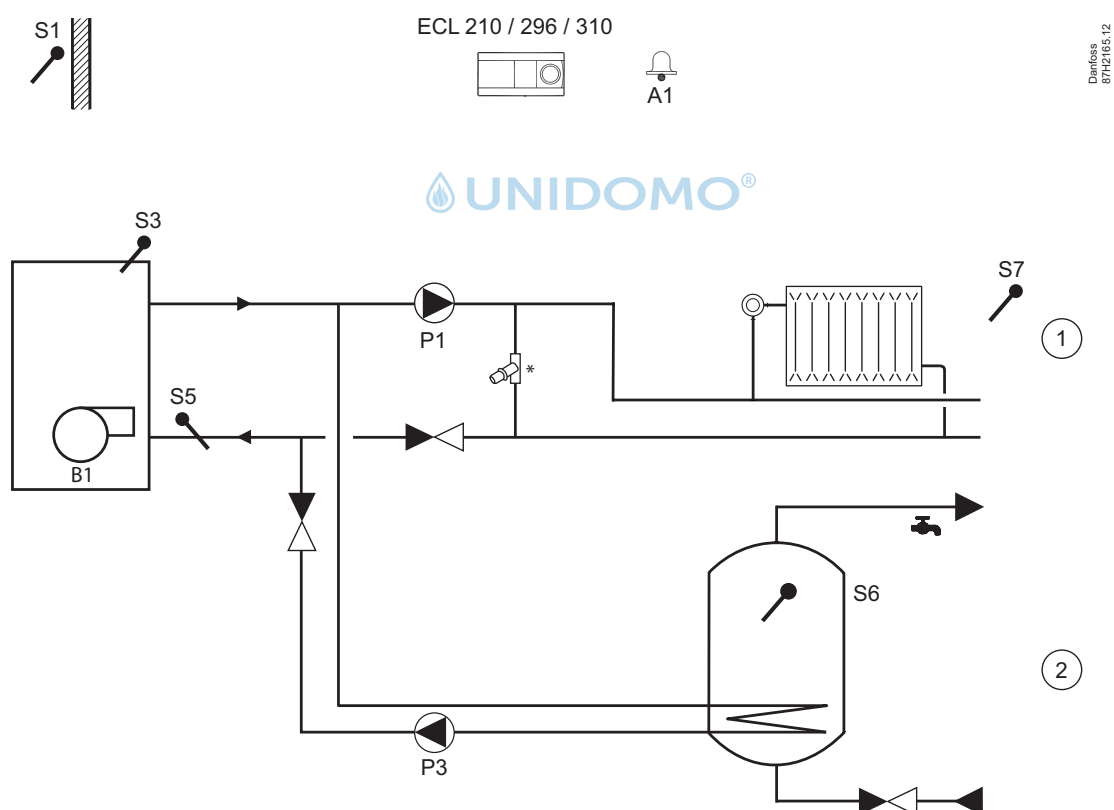


A275.2 (ex. b):

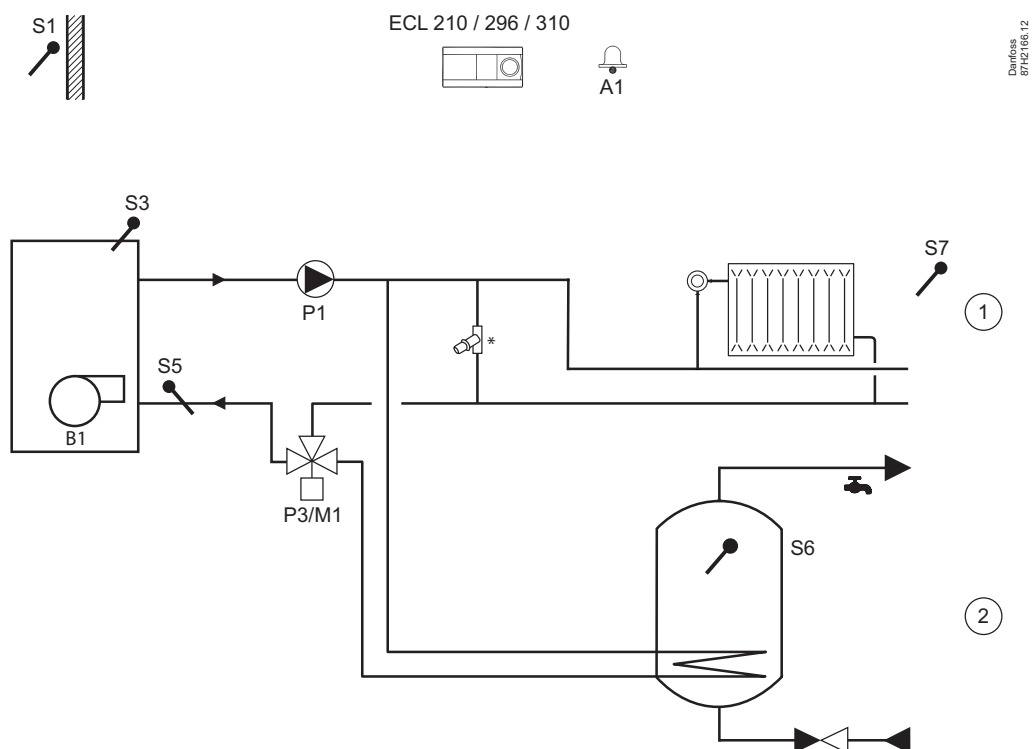


A275.2 (ex. c):

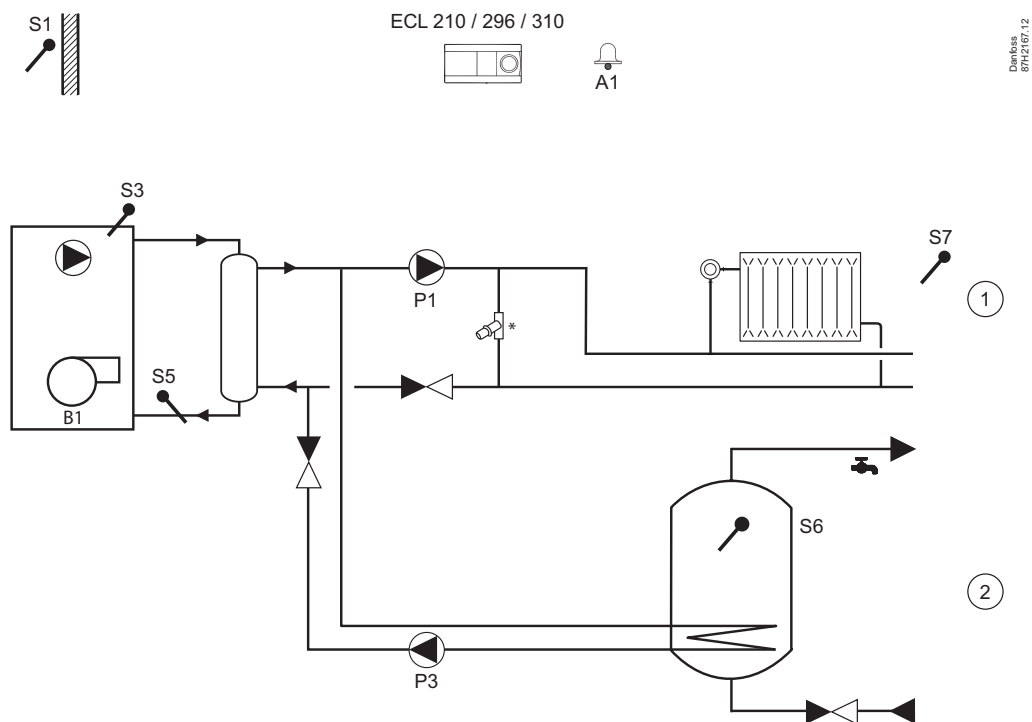


A275.2 (ex. d):

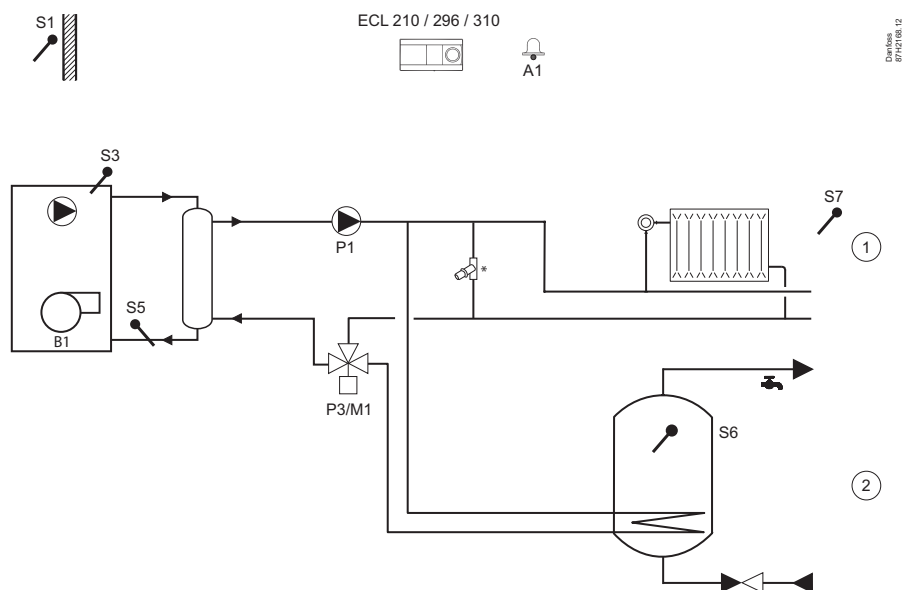


A275.3 (ex. a):

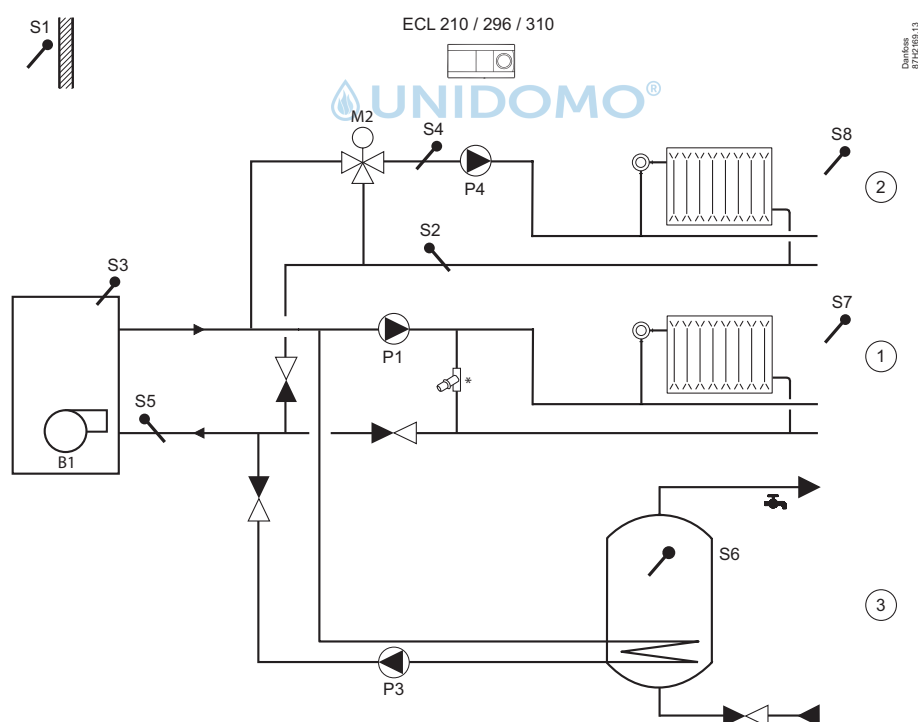


A275.3 (ex. b):

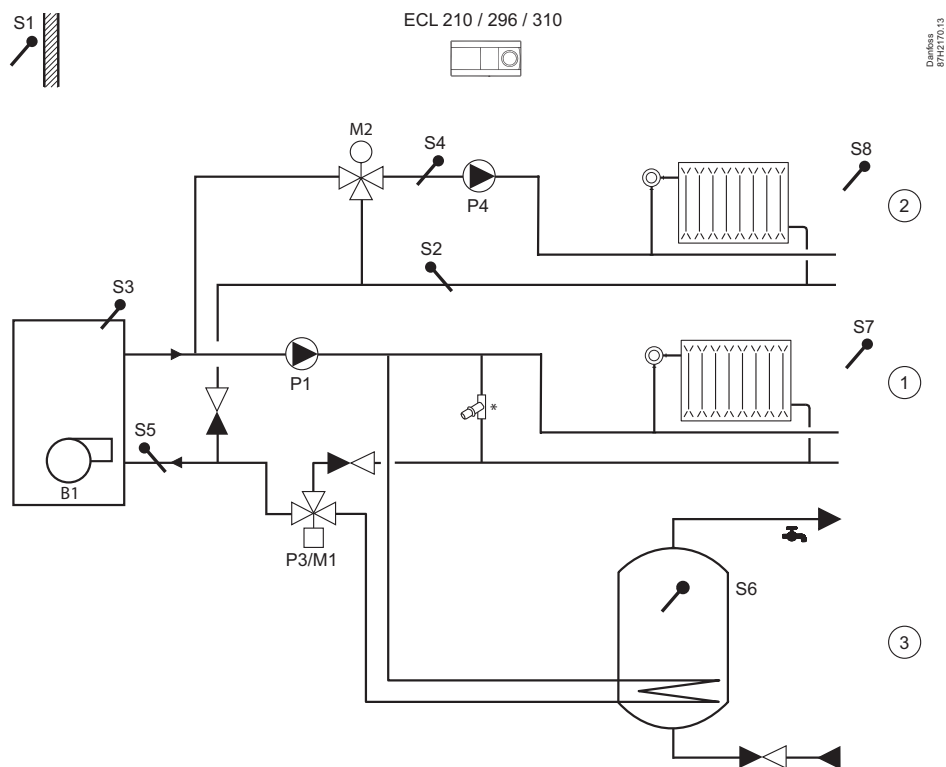


A275.3 (ex. c):

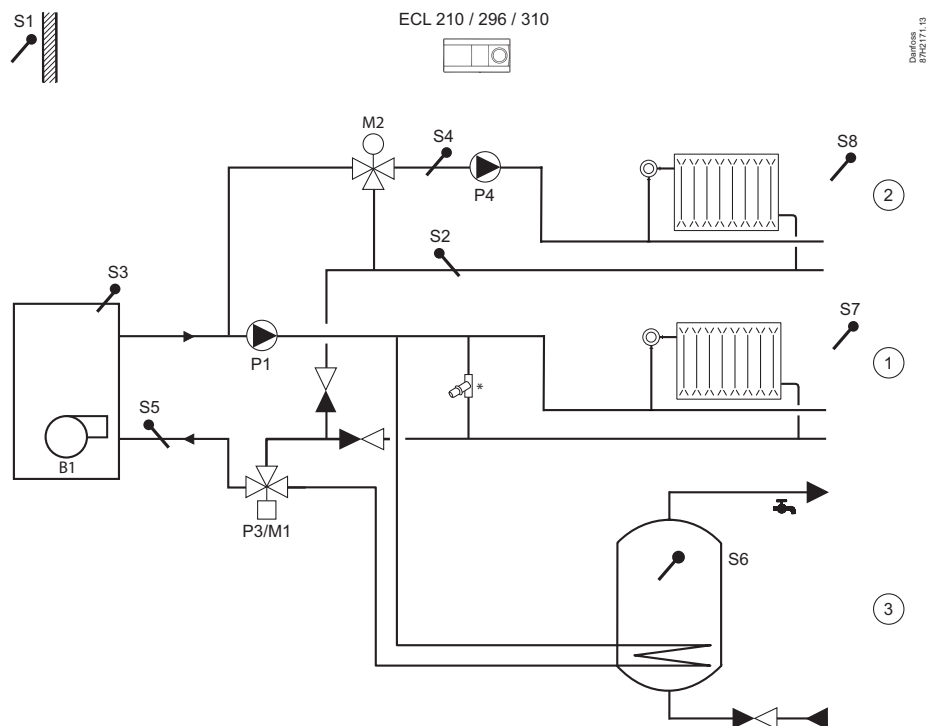


A275.3 (ex. d):

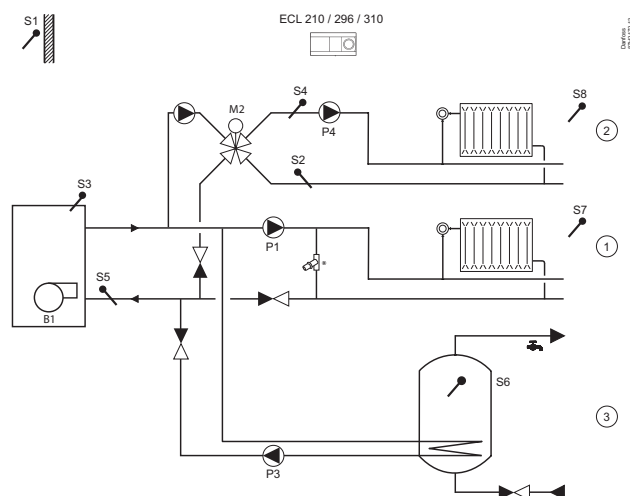


A275.3 (ex. e):

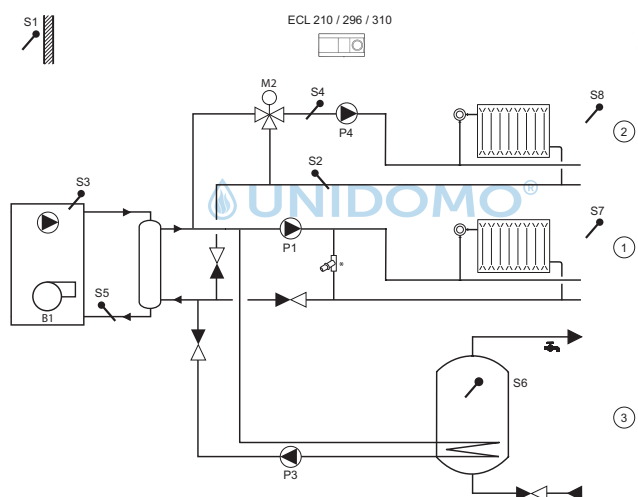


A275.3 (ex. f):

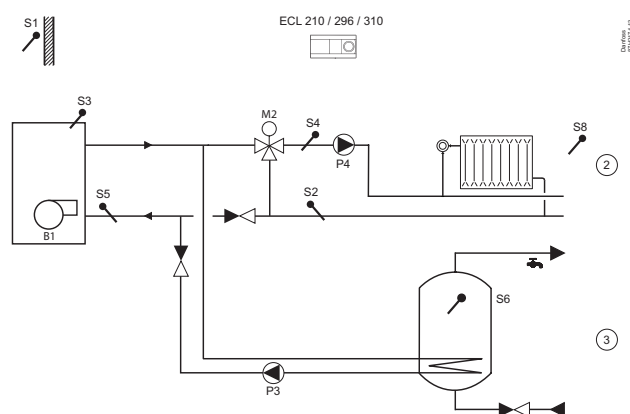


A275.3 (ex. g):

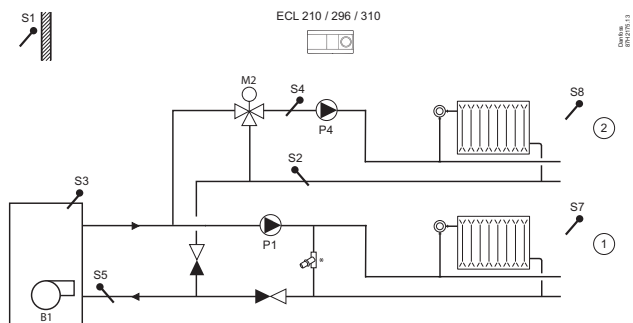


A375.1 (ex. a):

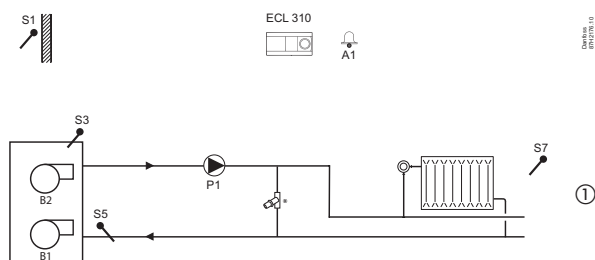


A375.1 (ex. b):

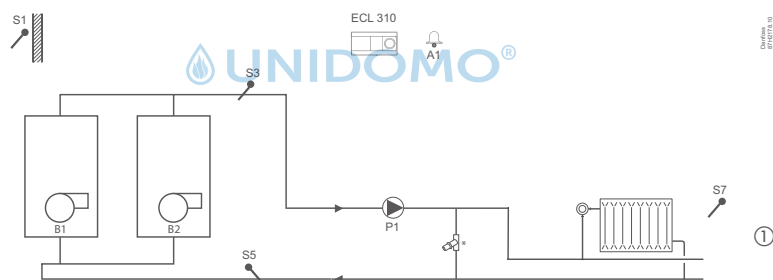


A375.1 (ex. c):

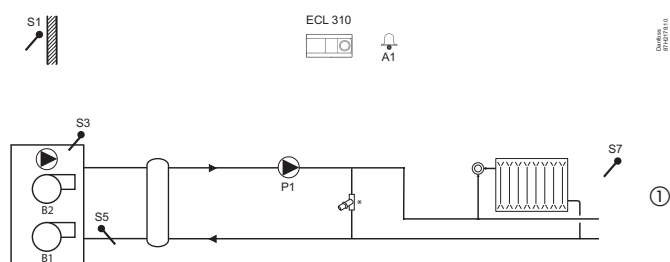


A375.1 (ex. d):

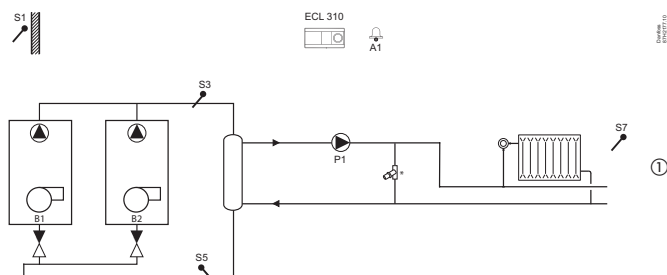


A375.1 (ex. e):

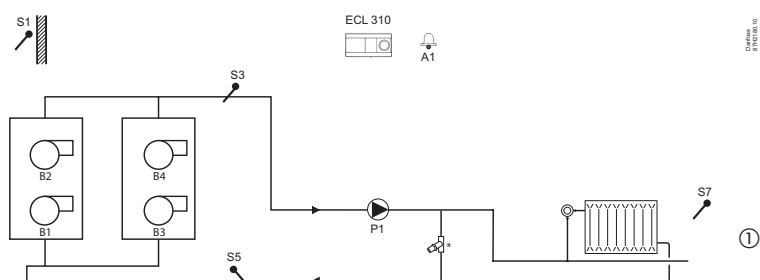


A375.1 (ex. f):

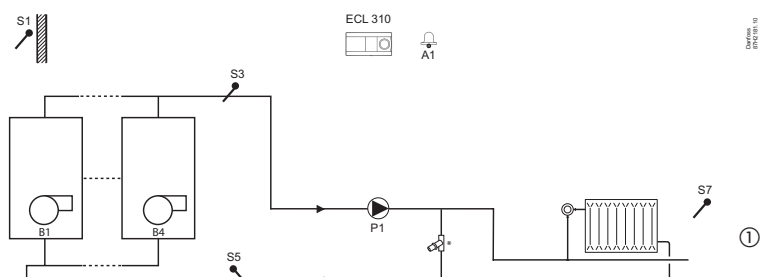


A375.1 (ex. g):

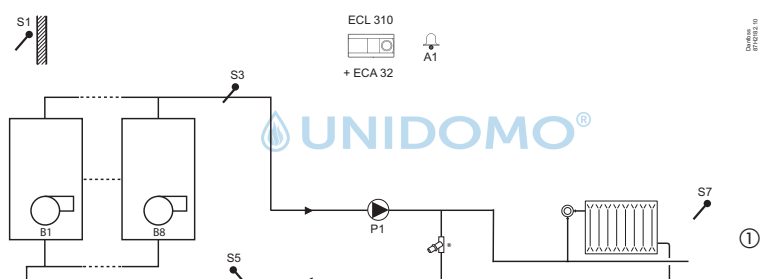


A375.1 (ex. h):

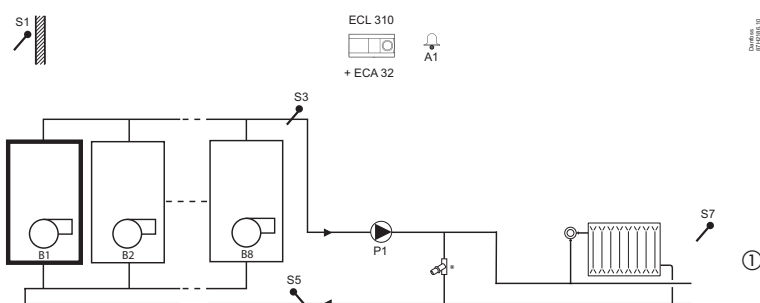


A375.1 (ex. i):

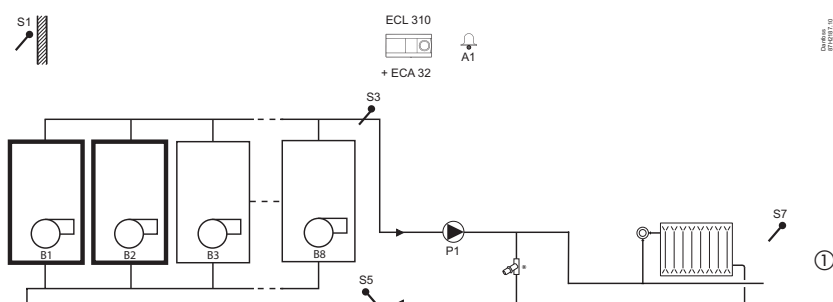


A375.2 (ex. a):

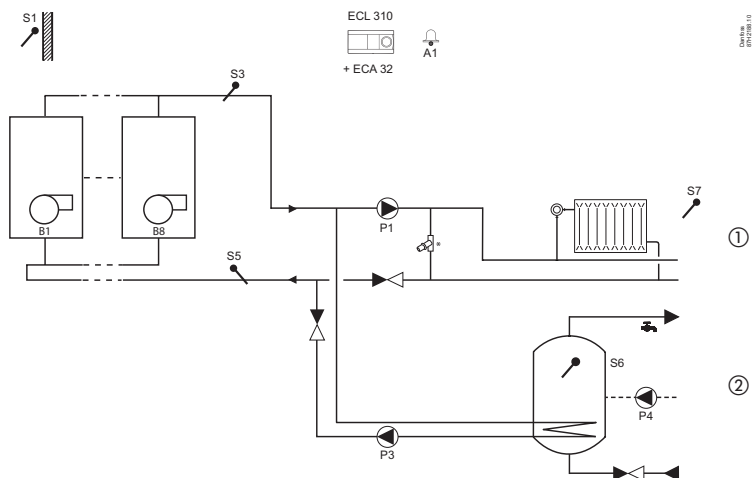


A375.3 (ex. a):

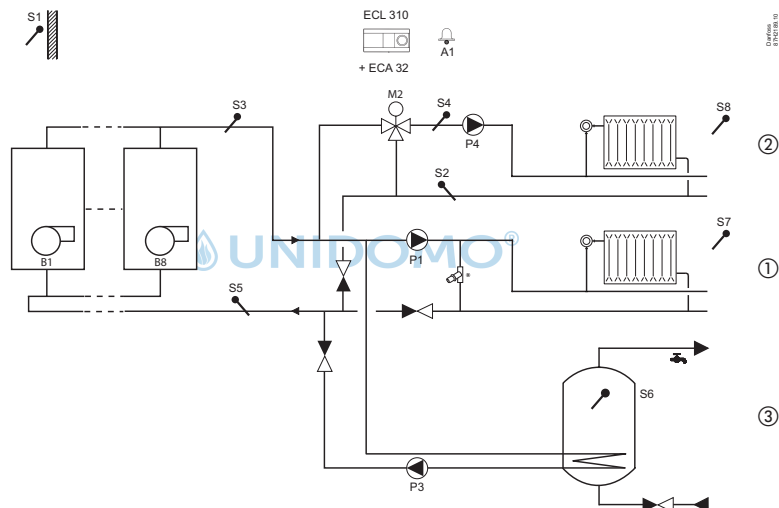

A375.4, ex. a:

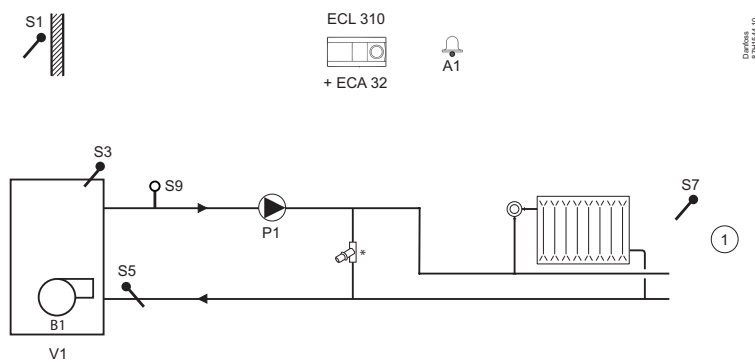


A375.5, ex. a:

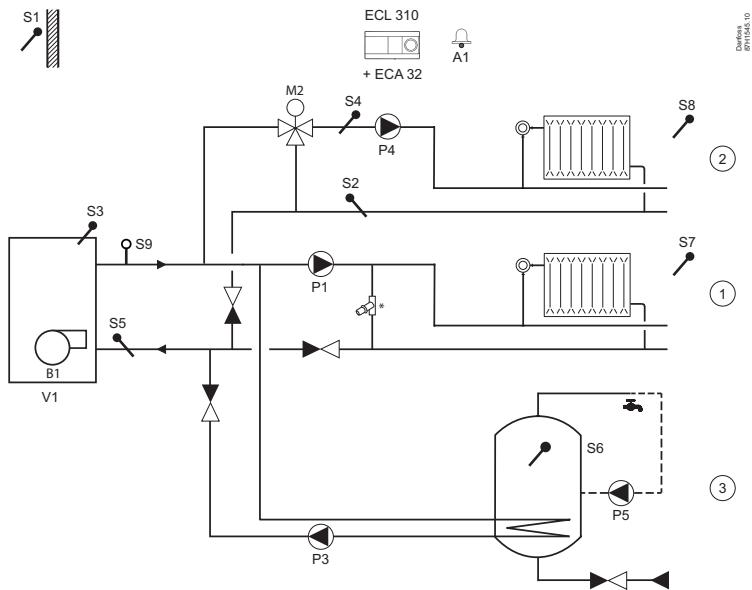

ECL Comfort 210 / 310:
230 V a.c.

R	4 (2) A / 230 V a.c.
R	0,2 A / 230 V a.c.
Tr	



ECL 210, 230 V a.c.:

	3-point	
	M1	M2
A275.1		
A275.2	✓	
A275.3	✓	✓

ECL 210, 230 V a.c.:

	P1	B1	P3	P4
A275.1	✓	✓		
A275.2	✓	✓	✓	
A275.3	✓	✓	✓	✓


ECL 310, 230 V a.c.:

	3-point				0-10 V: (ECA 32)
	M1	M2	M3		V1
A275.1					
A275.2	✓				
A275.3	✓	✓			
A375.1					
A375.2	✓				
A375.3	✓	✓			
A375.4			✓		✓
A375.5		✓	✓		✓


ECL 310, 230 V a.c.:

	P1	B1	P3	P4	P5
A275.1	✓	✓			
A275.2	✓	✓	✓		
A275.3	✓	✓	✓	✓	
A375.1	✓	✓			
A375.2	✓	✓	✓	✓	
A375.3	✓	✓	✓	✓	
A375.4	✓	✓			
A375.5	✓	✓	✓	✓	✓


230 V a.c. - A275.1/A275.2:

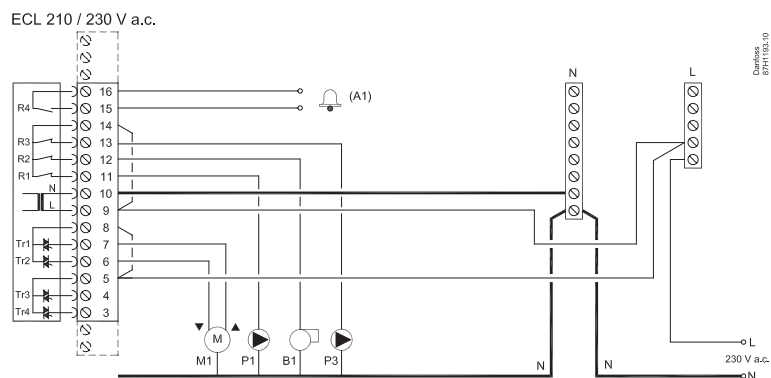


P3/M1 (A275.2):

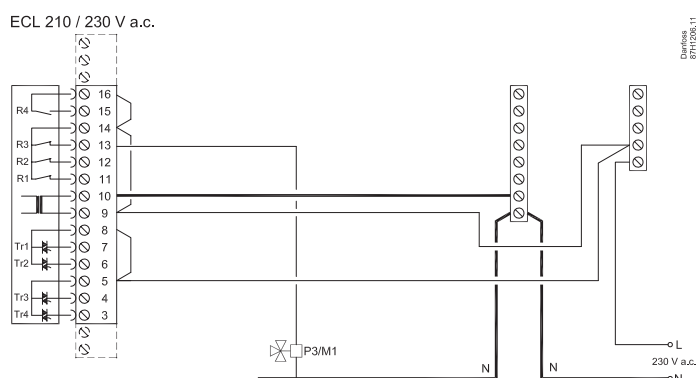


A275.3:

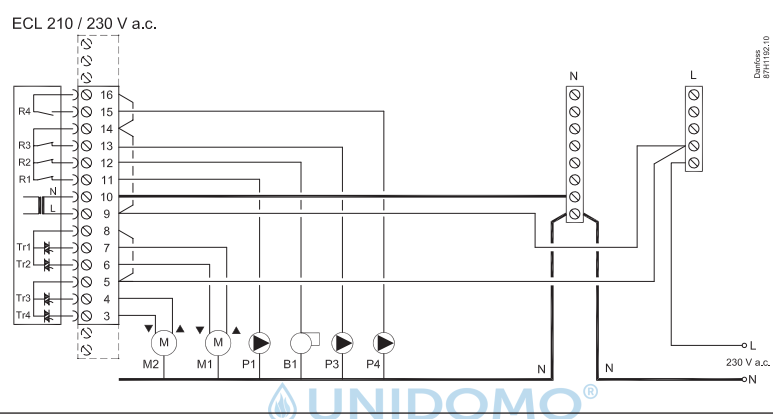


P3 / M1 (A275.3):

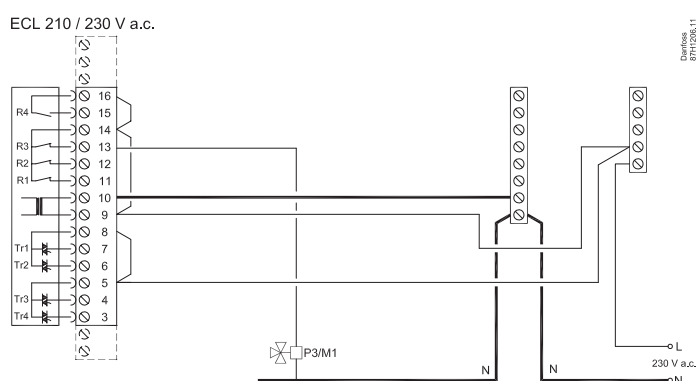


A375.1 (B1 ... B4):

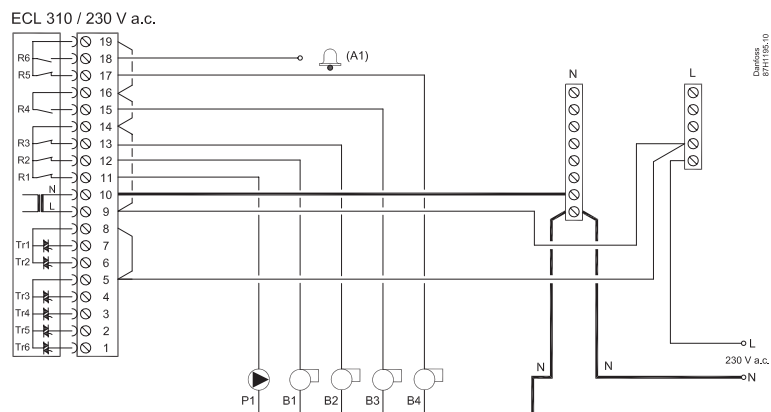


A375.1 (B5 ... B8):

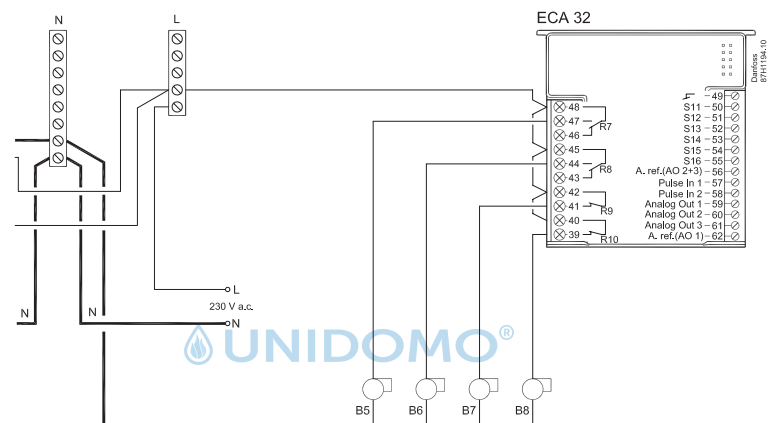


A375.2 / A375.3 (B1 ... B2):

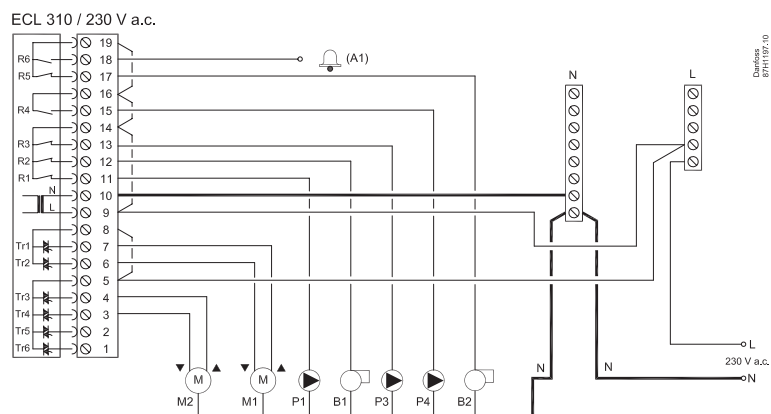


P3 / M1:

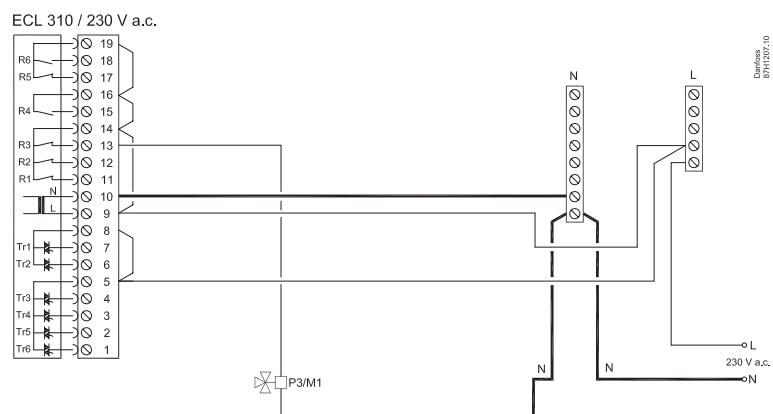


A375.2 / A375.3 (B3 ... B6):

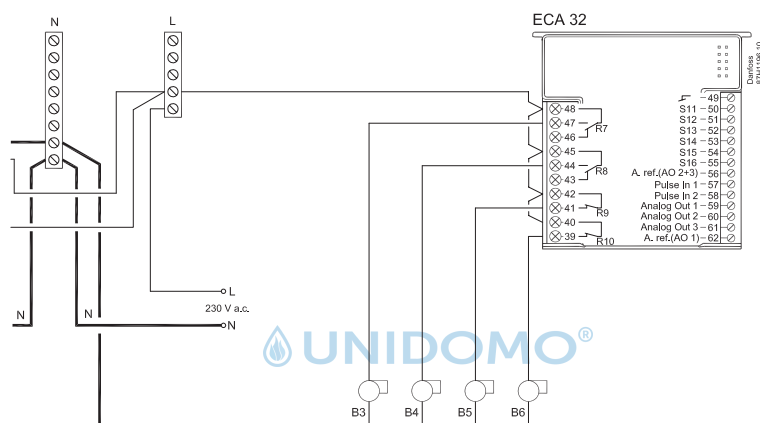


A375.2 / A375.3 (B7 ... B8):

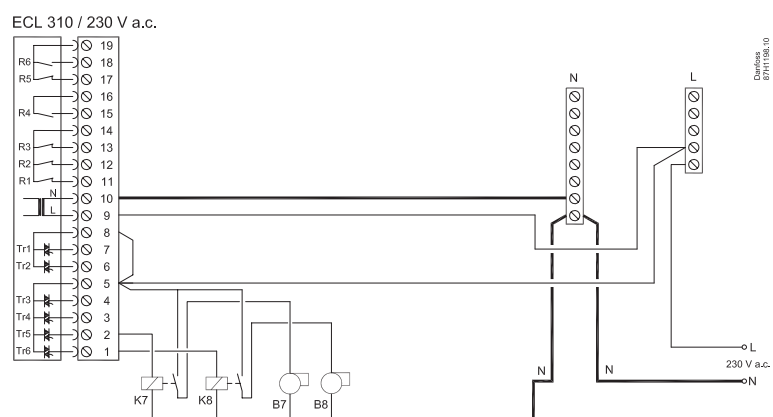


A375.4 / A375.5:

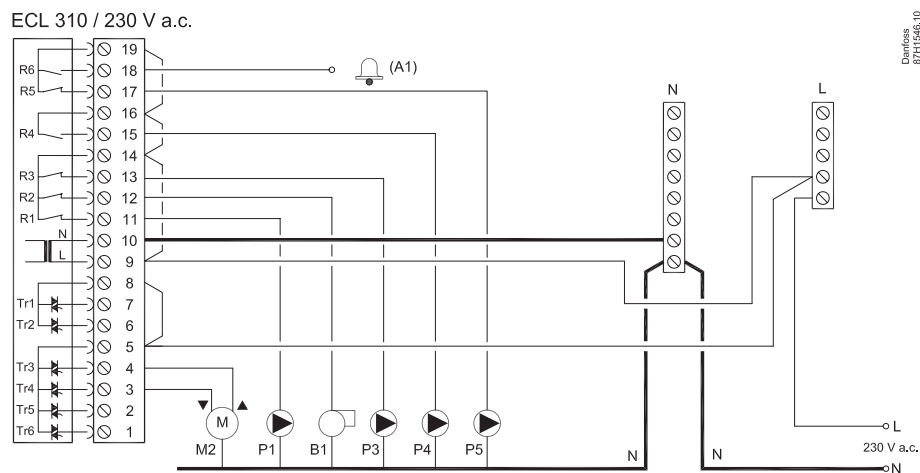

A375.4 / A375.5, Solid State relays:

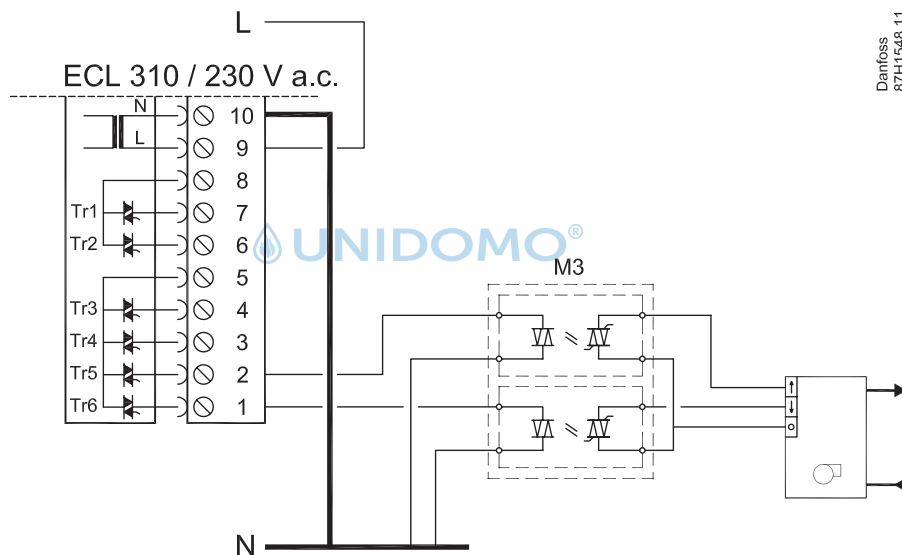

A375.4 / A375.5, ECA 32:

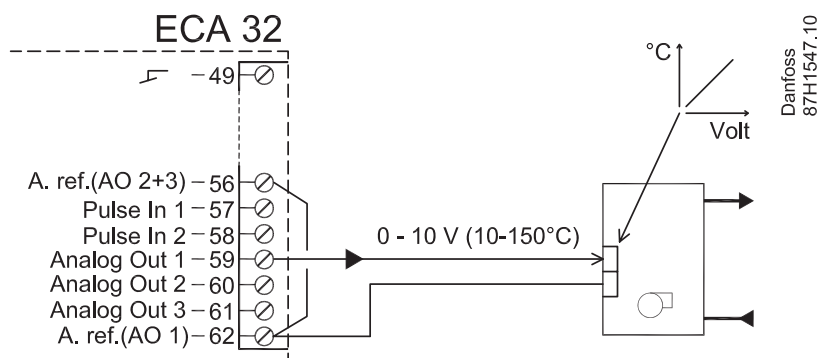

ECL Comfort 210 / 310:

24 V a.c.

R 	4 (2) A / 24 V a.c.
R 	
Tr 	1 A / 24 V a.c.

ECL 310, 24 V a.c.:


	3-point				0-10 V: (ECA 32)
	M1	M2	M3		V1
A275.1					
A275.2	✓				
A275.3	✓	✓			
A375.1					
A375.2	✓				
A375.3	✓	✓			
A375.4			✓		✓
A375.5		✓	✓		✓

ECL 310, 24 V a.c.:




	P1	B1	P3	P4	P5
A275.1	✓	✓			
A275.2	✓	✓	✓		
A275.3	✓	✓	✓	✓	
A375.1	✓	✓			
A375.2	✓	✓	✓	✓	
A375.3	✓	✓	✓	✓	
A375.4	✓	✓			
A375.5	✓	✓	✓	✓	✓


24 V a.c. - A275.1 / A275.2:

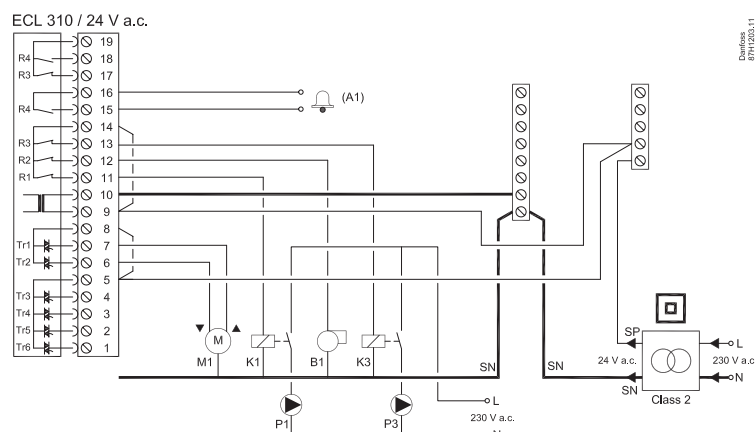


P3 / M1 - A275.2 / A275.3:

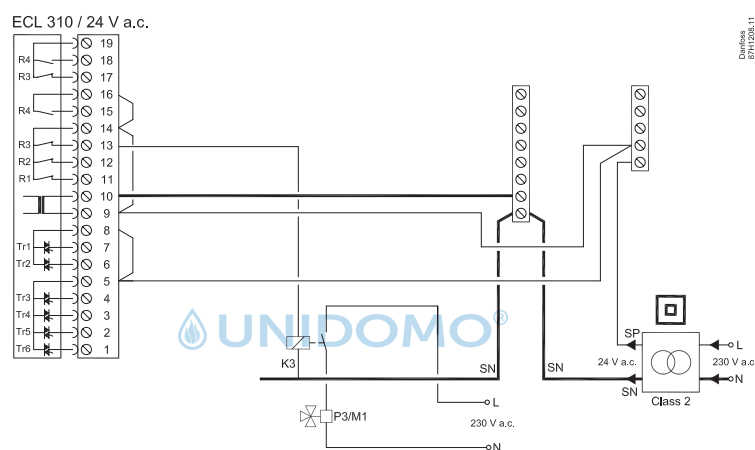


A275.3:

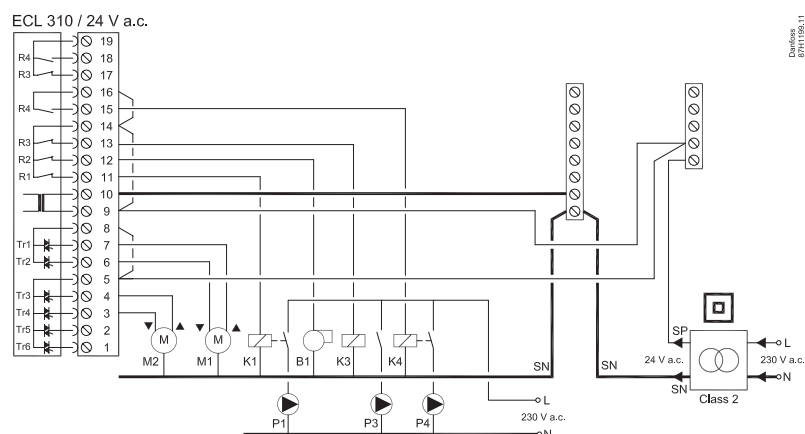


A375.1 (B1 ... B4):

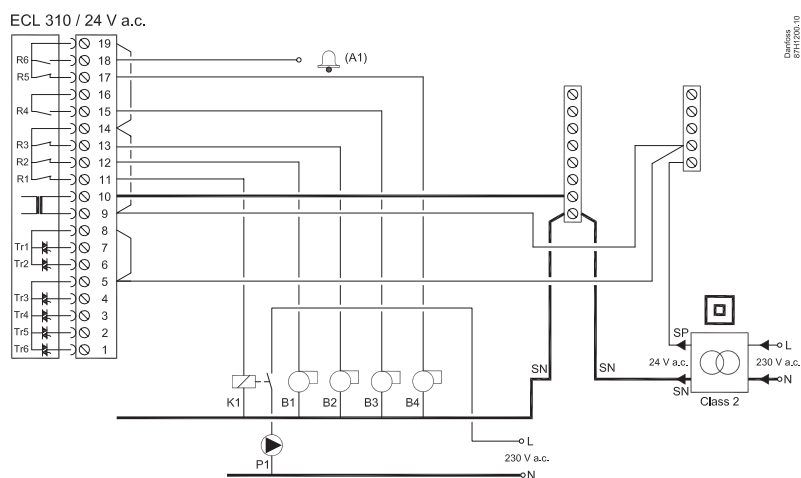


A375.1 (B5 ... B8):

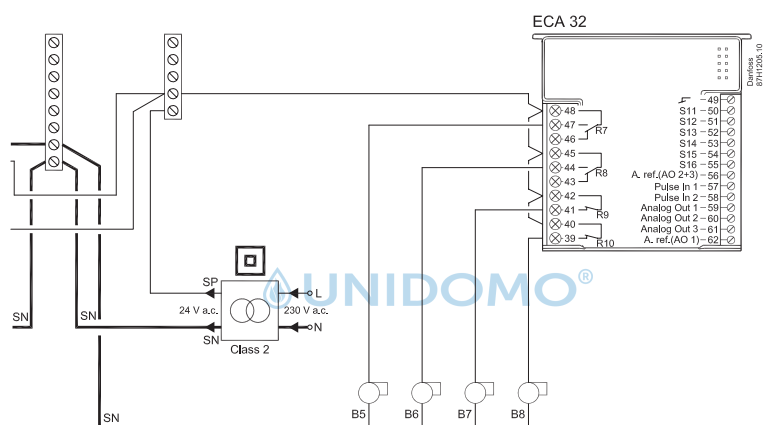


A375.2 / A375.3 (B1 ... B2):

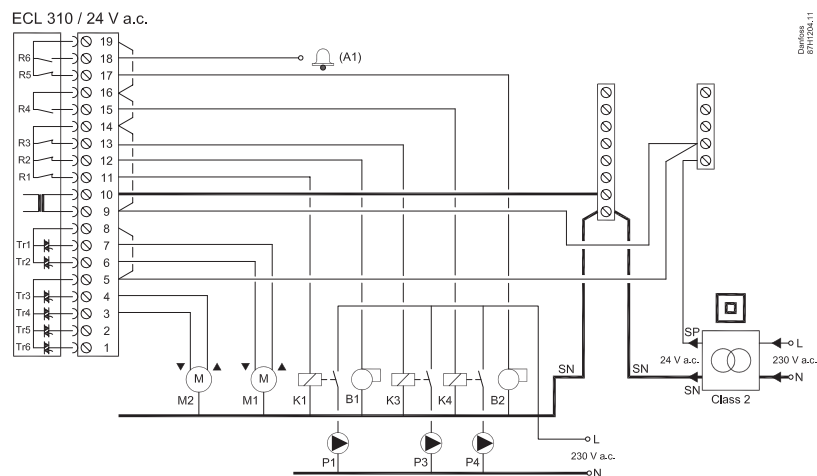


P3 / M1:

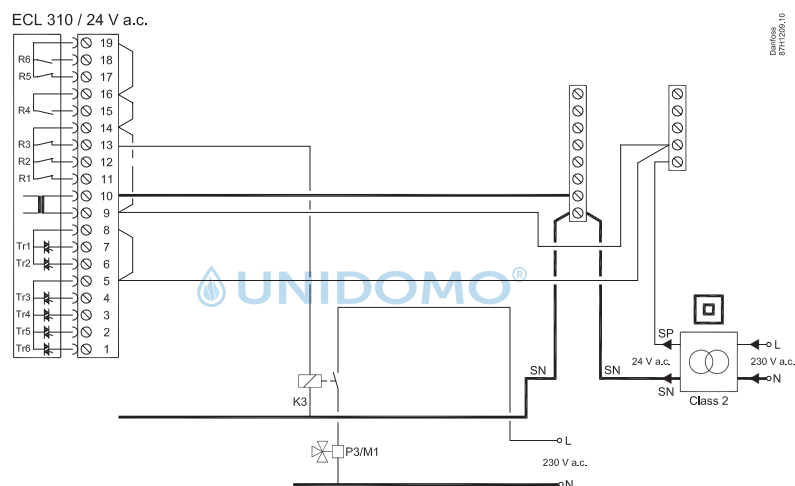


A375.2 / A375.3 (B3 ... B6):

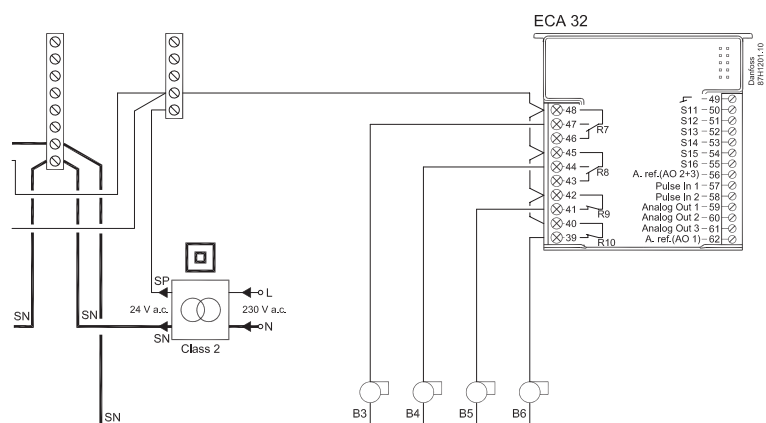


A375.2 / A375.3 (B7 ... B8):

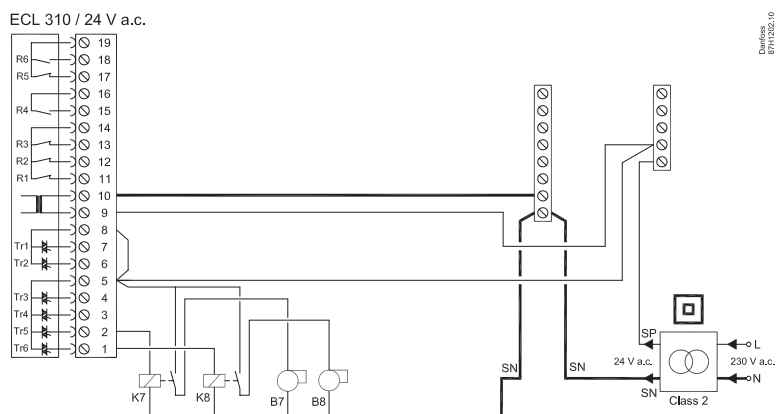

A375.4 / A375.5:




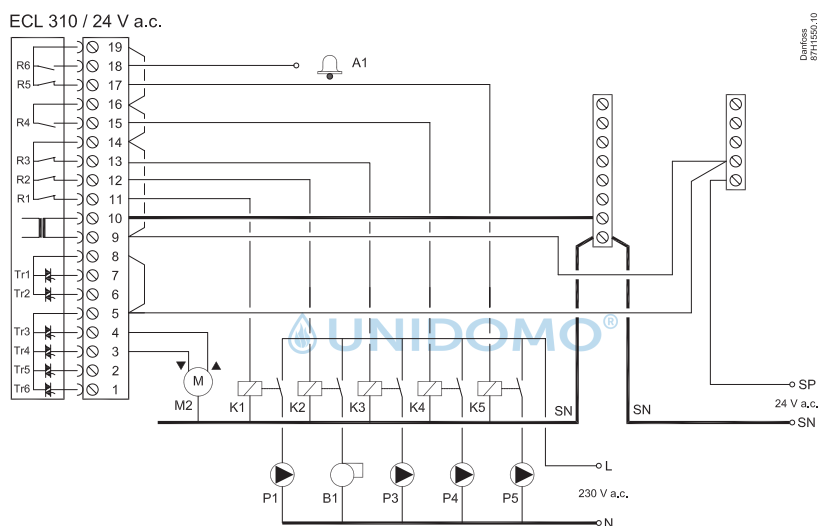


A375.4 / A375.5, Solid State relays:


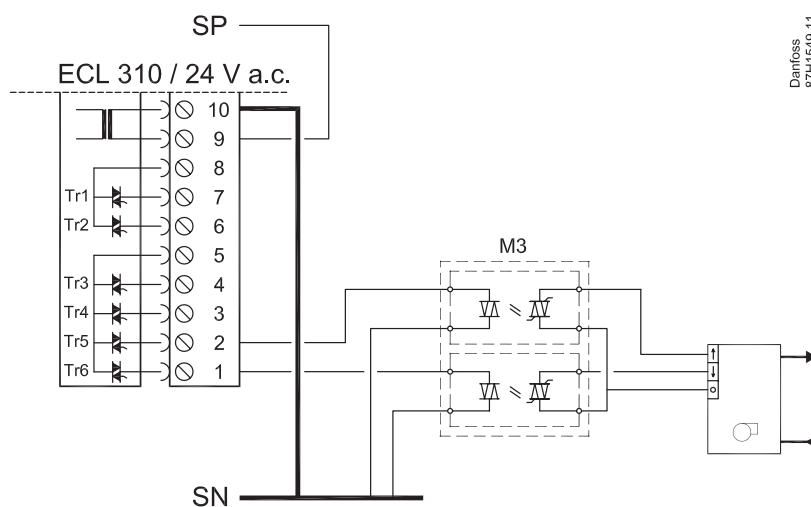


230 V a.c. / 24 V a.c. safety thermostat




1-step closing

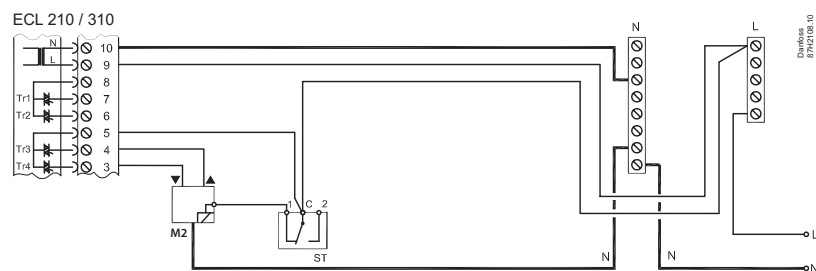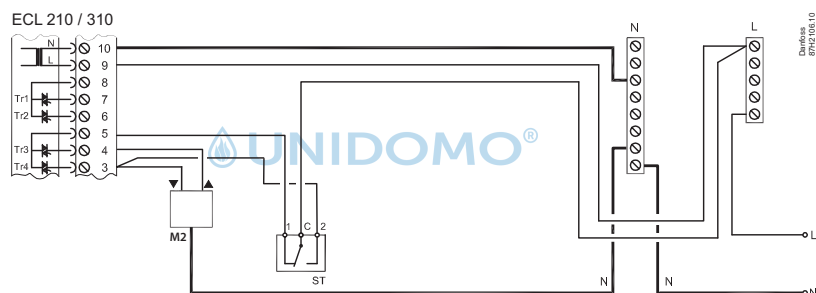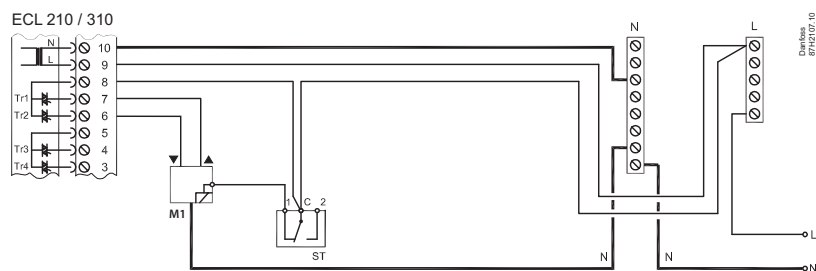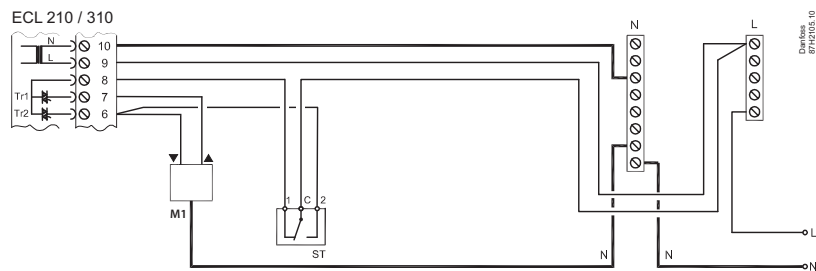


2-step closing

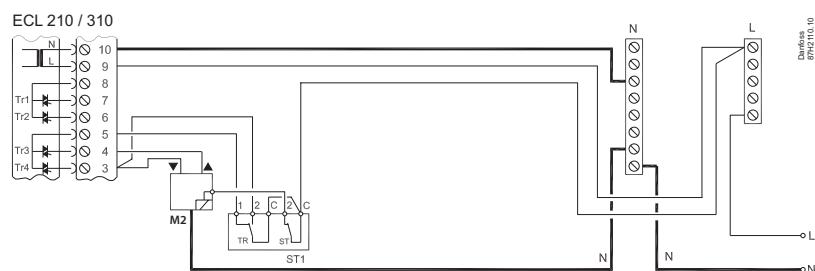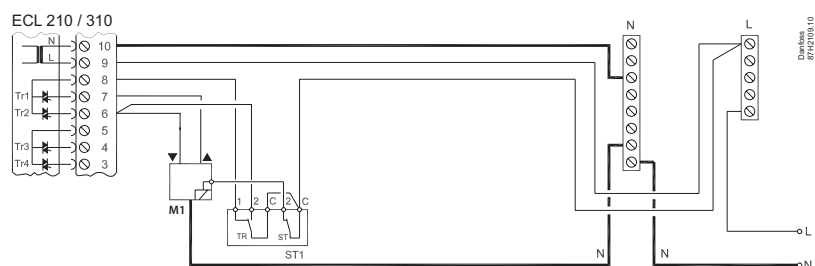


Pt 1000 (1000 Ω / 0 °C)

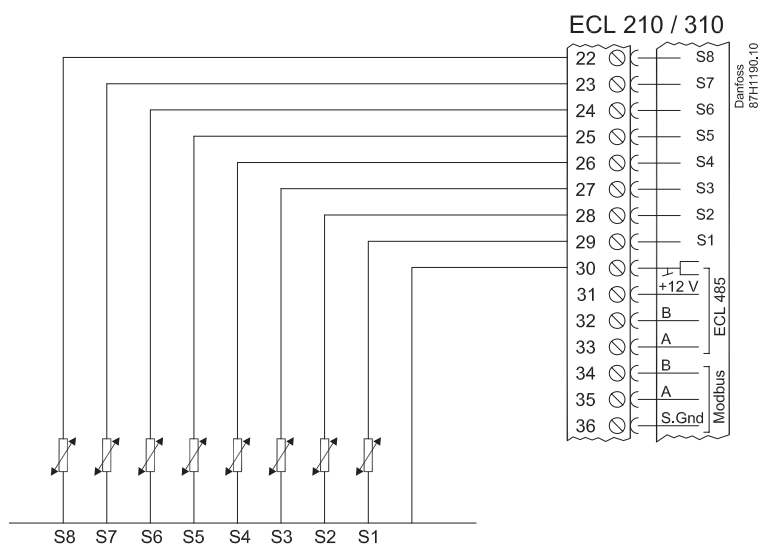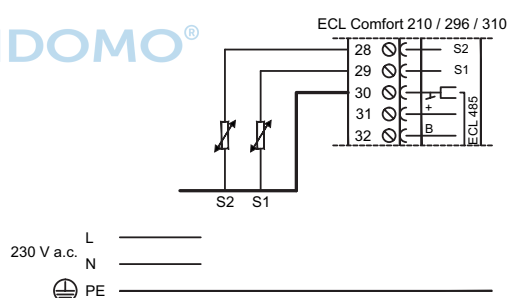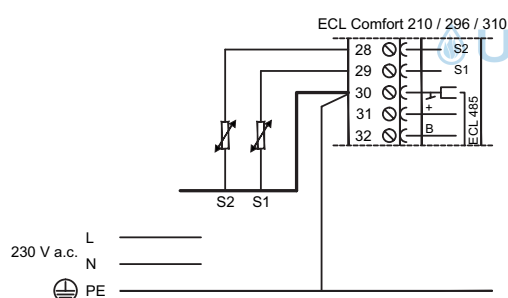


S9

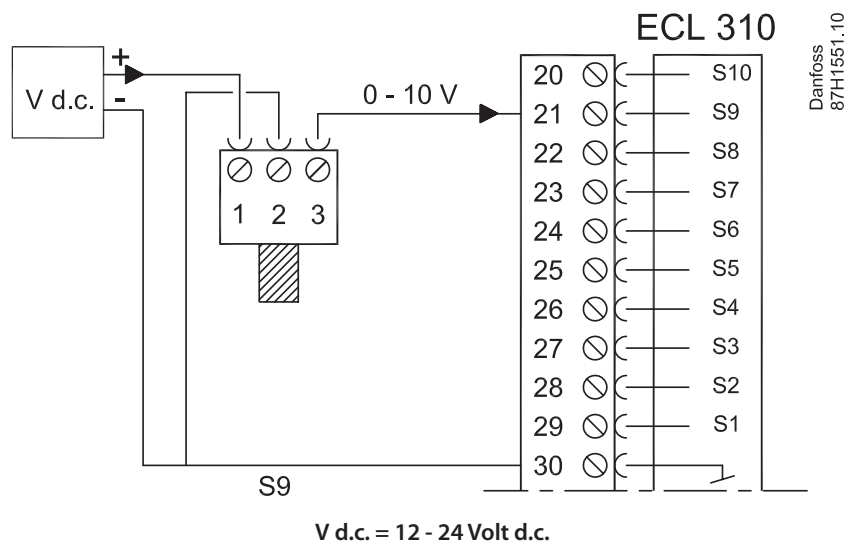


S9

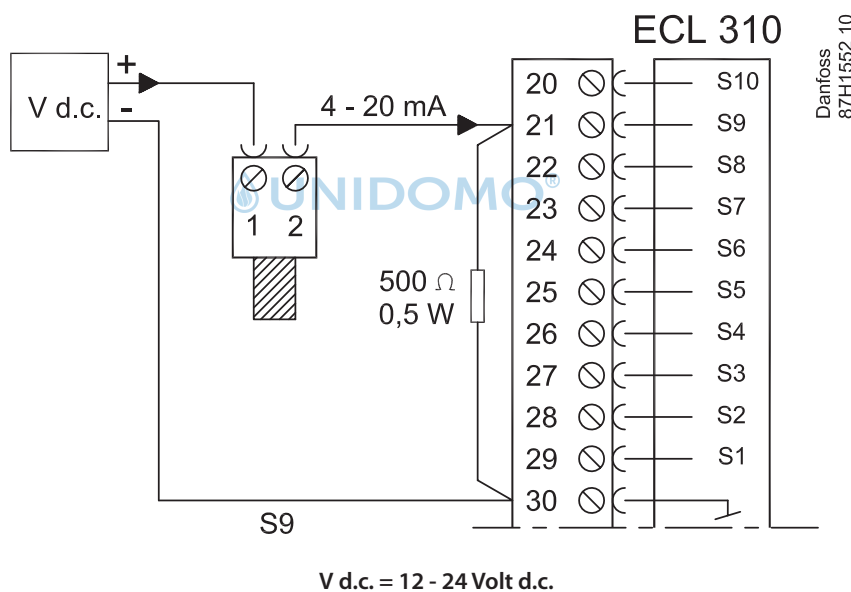


A375 (0-10 V)




ECA 30 / 31

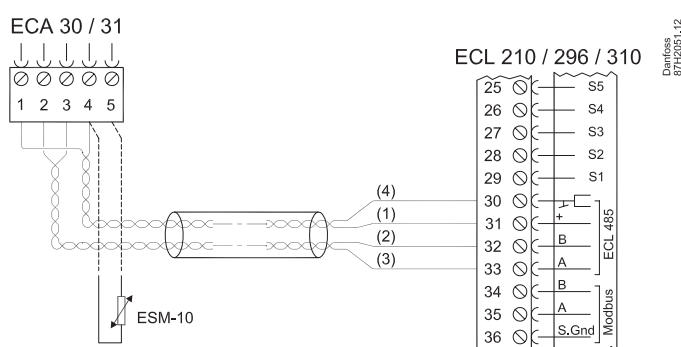


ECA 30 / 31

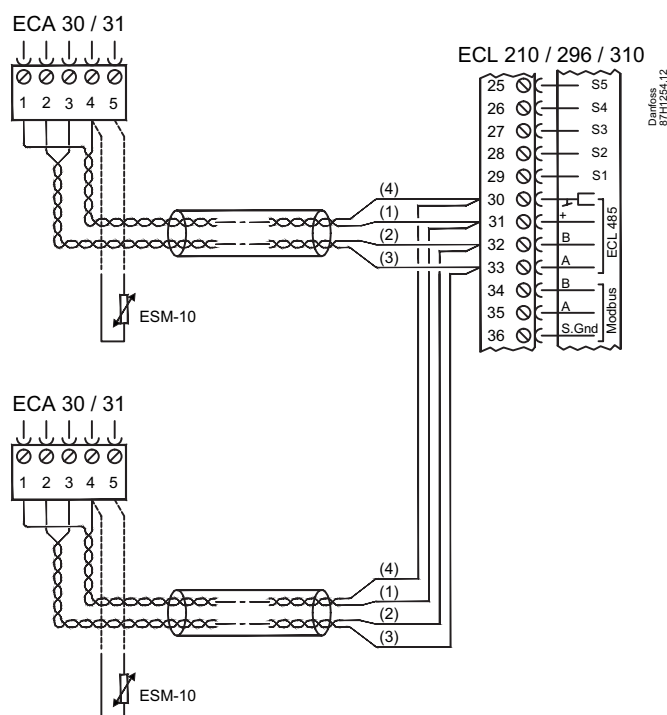


Master / slave

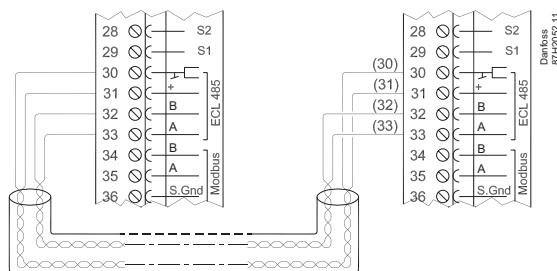


Modbus





M-bus

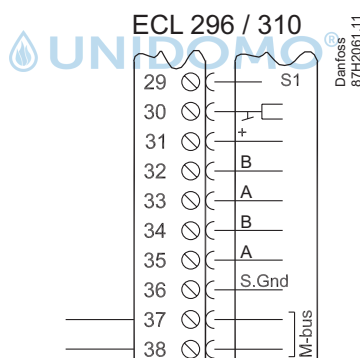

M-bus

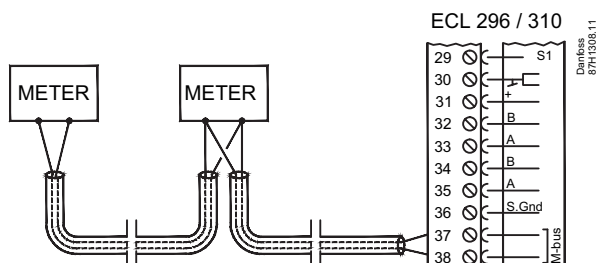


Pt 1000 (IEC 751B, 1000 Ω / 0 °C)

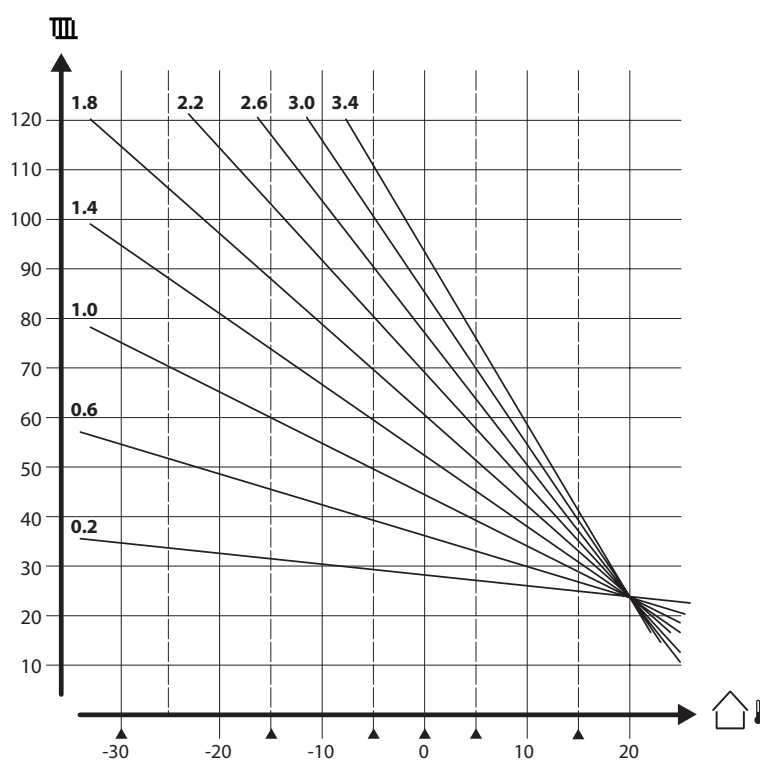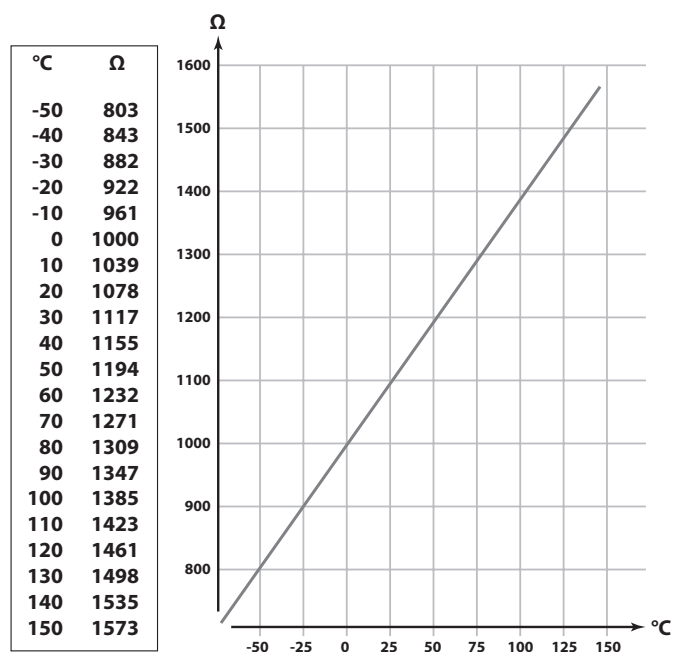


ECA 30


1

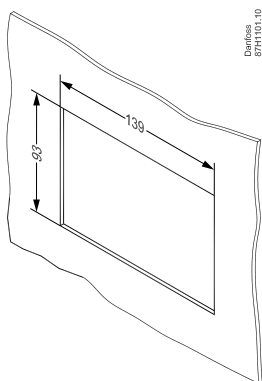


2

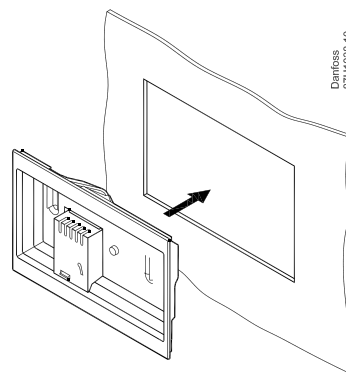


3

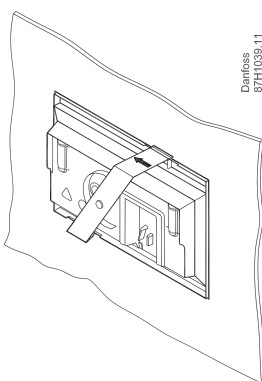


4

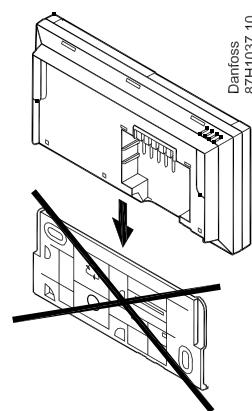


5

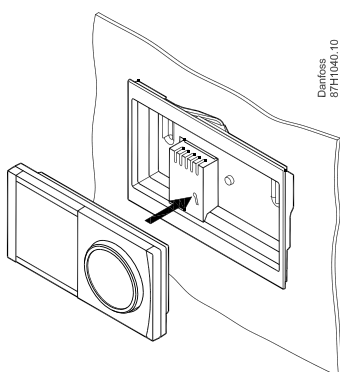


6

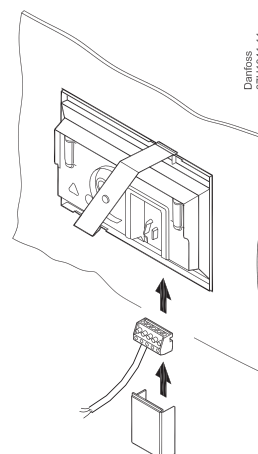

7

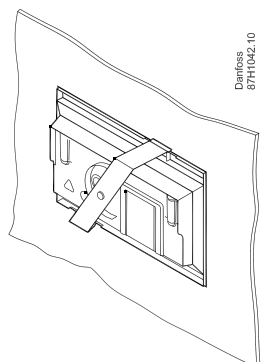

8

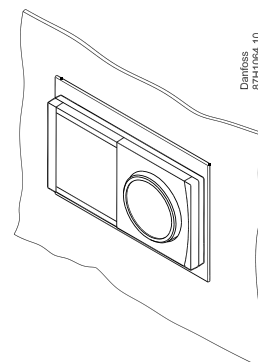

UNIDOMO®



Web: www.unidomo.de

Telefon: 04621- 30 60 89 0

Mail: info@unidomo.com

Öffnungszeiten: Mo.-Fr. 8:00-17:00 Uhr

VIESSMANN



 **Vaillant**

WOLF

 **JUNKERS**  **BOSCH**

 **remeha**

 **DAIKIN**





ROTEX
a member of DAIKIN group



-  Individuelle Beratung
-  Kostenloser Versand
-  Hochwertige Produkte

-  Komplettpakete
-  Über 15 Jahre Erfahrung
-  Markenhersteller

Installation Guide, ECL Comfort 210 / 296 / 310, A275 / A375

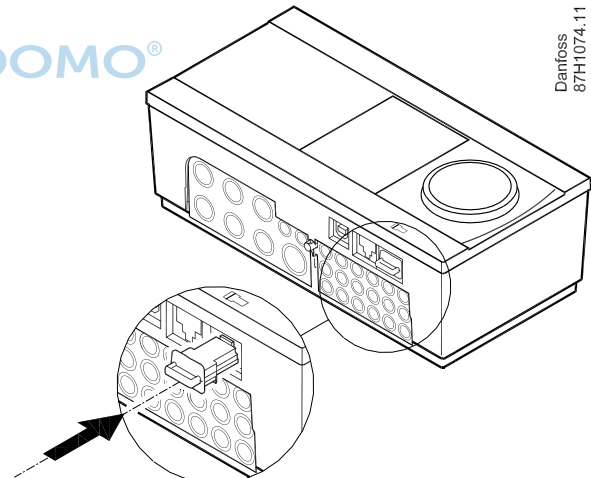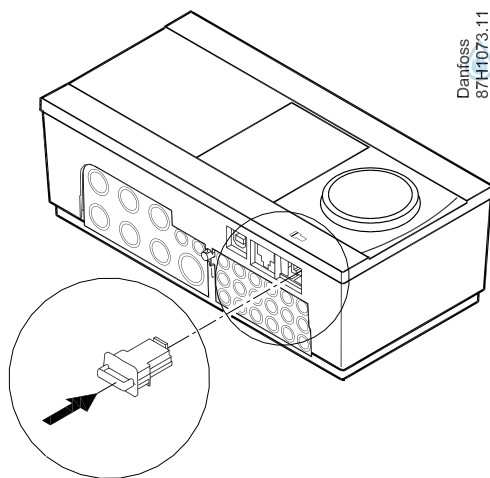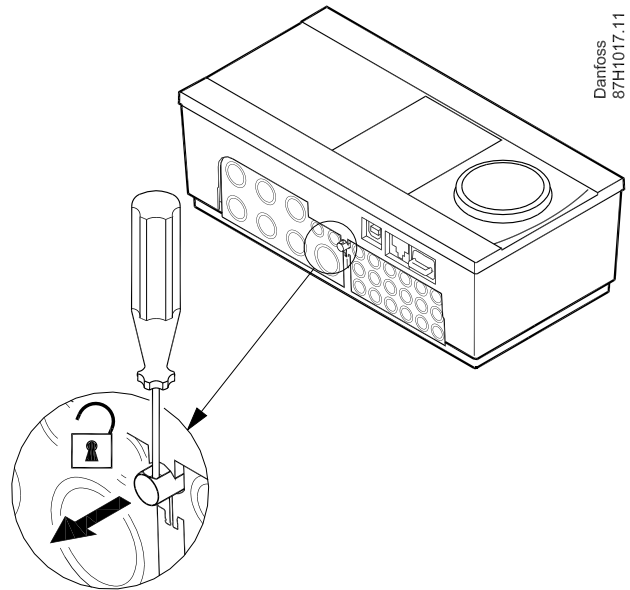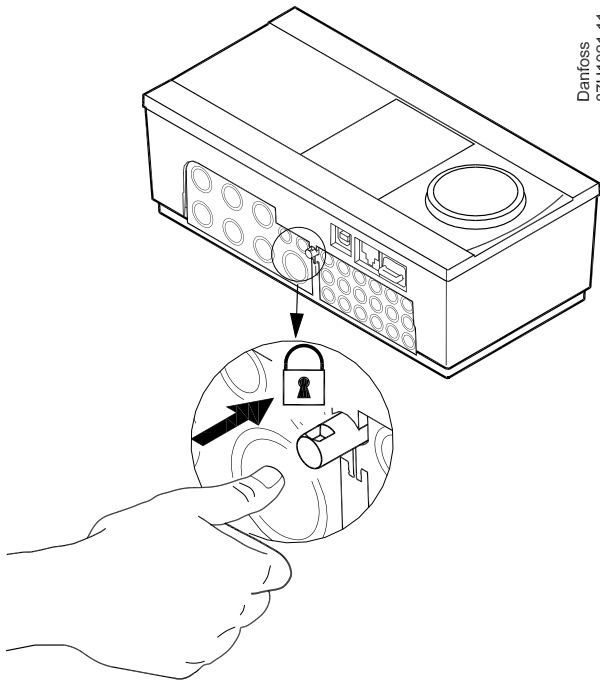

? **ECL Comfort 210 / 296 / 310, A275 / A375: www.heating.danfoss.com**



Danfoss A/S

Heating Segment • heating.danfoss.com • +45 7488 2222 • E-Mail: heating@danfoss.com

Danfoss can accept no responsibility for possible errors in catalogues, brochures and other printed material. Danfoss reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without substantial changes being necessary in specifications already agreed. All trademarks in this material are property of the respective companies. Danfoss and all Danfoss logotypes are trademarks of Danfoss A/S. All rights reserved.