

EAN: 4015474271128
static.hansa.com/01092283



- Waschtisch
- Einhebelmischer
- Standmontage
- Chrom
- Feststehender Auslauf, gegossen
- PCA® konstante Durchflussleistung unabhängig vom Fließdruck
- Hebel mit W+K-Kennzeichnung, Einhandbedienhebel/Griff
- Ablaufgarnitur mit Zugstange
- Temperaturbegrenzer, Heißwassersperre einstellbar (im Lieferumfang enthalten)
- HANSAECO ø 4.8 Steuerpatrone mit keramischen Dichtscheiben zur Wassermengen- und Temperatureinstellung. Wasserbremse bei ca. 60% Wassermenge
- Anschluss über flexible Druckschläuche
- Armaturenkörper aus entzinkungsbeständigem Messing (DZR), Rapid-Montagesystem

Technische Daten

Durchflusseigenschaften

Spar-Durchfluss bei 3 bar	4.2 l/min
Durchfluss bei 3 bar (mit Durchflussregler)	7.8 l/min

Technische Eigenschaften

DN-Größe (Nennmaß)	DN15
Warmwasserversorgung	max. +80°C
Arbeitsdruck	1-10 bar
Anschlussgröße	G3/8
Projection	141 mm
Werkstoff	Messing




Vorschriften

EN Standard	EN 817
Geräuschklasse	I (ISO 3822)

Zulassungen und Deklarationen

KIWA	K6116/08
DVGW	NW-6506BU0493
ABP	P-IX 29885/IA

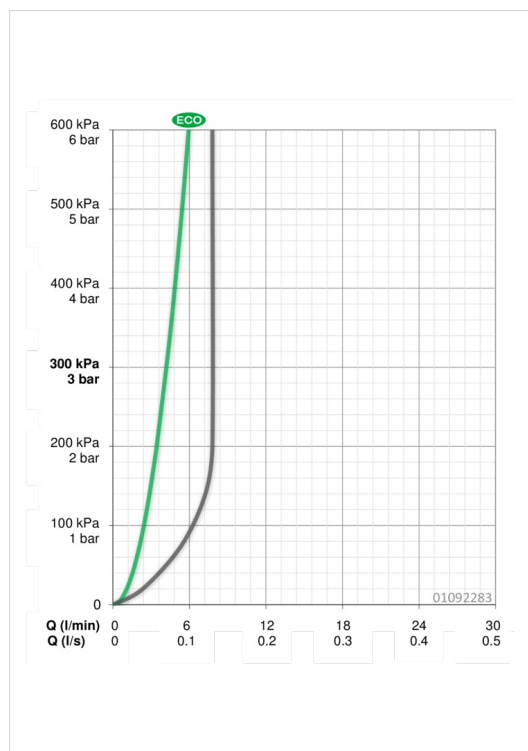



Web: www.unidomo.de

Telefon: 04621- 30 60 89 0

Mail: info@unidomo.com

Öffnungszeiten: Mo.-Fr. 8:00-17:00 Uhr

VIESSMANN



 **Vaillant**

WOLF

 **JUNKERS**  **BOSCH**

 **remeha**

 **DAIKIN**

ROTEX
a member of DAIKIN group



Individuelle Beratung



Kostenloser Versand



Hochwertige Produkte




Komplettpakete



Über 15 Jahre Erfahrung



Markenhersteller

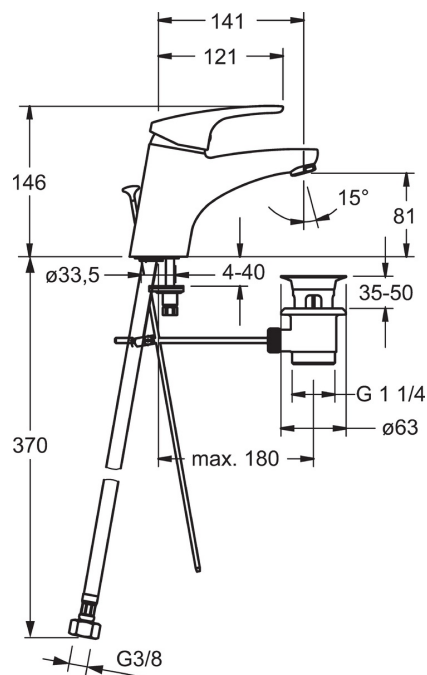

This exploded view diagram illustrates the components of a kitchen faucet assembly, numbered 1 through 7:

- 1**: Top handle assembly, including the handle (1.1), mounting bracket (1.2), and screw (1.3).
- 2**: Upper decorative cap.
- 3**: Lower decorative cap.
- 3.1**: O-ring for the lower cap.
- 4**: Cartridge assembly with a decorative cap (4.1).
- 5**: Main faucet spout.
- 5.1**: Long mounting screw.
- 5.11**: Small O-ring for the mounting screw.
- 5.12**: Short mounting screw.
- 5.2**: Lever handle for the hot/cold control.
- 5.3**: O-ring for the cartridge.
- 5.4**: O-ring for the cartridge.
- 5.5**: Cartridge body.
- 5.6**: Cartridge cap.
- 5.7**: Cartridge cap O-ring.
- 5.8**: Mounting bracket for the spout.
- 5.9**: Mounting bracket O-ring.
- 5.10**: Mounting bracket O-ring.
- 6**: Small decorative cap for the cartridge.
- 7**: Base assembly including the mounting bracket (7.1) and the base (7.2).

MO[®] 12/2