

EAN: 4057304007224
static.hansa.com/51983283



one-hole single-lever mixer, DN 15

- Bidet
- Einhebelmischer, Seitenbedient
- Standmontage
- Chrom
- Feststehender Auslauf
- PCA® konstante Durchflussleistung unabhängig vom Fließdruck, CACHÉ® Strahlregler, ohne Mundstück direkt in den Armaturenauslauf geschraubt, Kugelgelenk
- Einhandbedienhebel/Griff, Hebel mit W+K-Kennzeichnung
- Ablaufgarnitur mit Zugstange
- ø 2.5 Steuerpatrone mit keramischen Dichtscheiben zur Wassermengen- und Temperatureinstellung
- Anschluss über flexible Druckschläuche
- HANSA 3S-Installation: System für sichere und schnelle Montage

Technische Daten

Durchflusseigenschaften

Durchfluss bei 3 bar (mit Durchflussregler)	6.0 l/min
Druckverlust bei einem Durchfluss von 0,1 l/s	1 bar


Technische Eigenschaften

DN-Größe (Nennmaß)	DN15
Warmwasserversorgung	max. +80°C
Arbeitsdruck	0.5-10 bar
Anschlussgröße	G3/8
Projection	119 mm
Werkstoff	Messing



Vorschriften

EN Standard	EN 817
Geräuschklasse	I (ISO 3822)

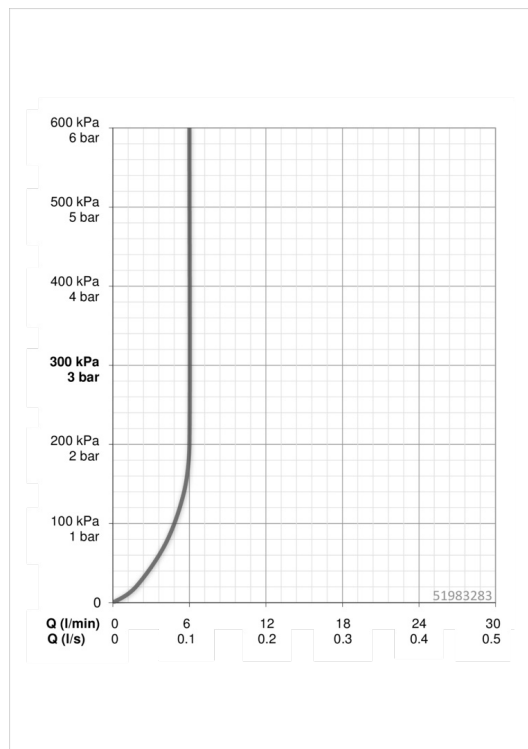



Web: www.unidomo.de

Telefon: 04621- 30 60 89 0

Mail: info@unidomo.com

Öffnungszeiten: Mo.-Fr. 8:00-17:00 Uhr

VIESSMANN



 **Vaillant**

WOLF

 **JUNKERS**  **BOSCH**

 **remeha**

 **DAIKIN**

ROTEX
a member of DAIKIN group



Individuelle Beratung



Kostenloser Versand



Hochwertige Produkte





Komplettpakete



Über 15 Jahre Erfahrung



Markenhersteller

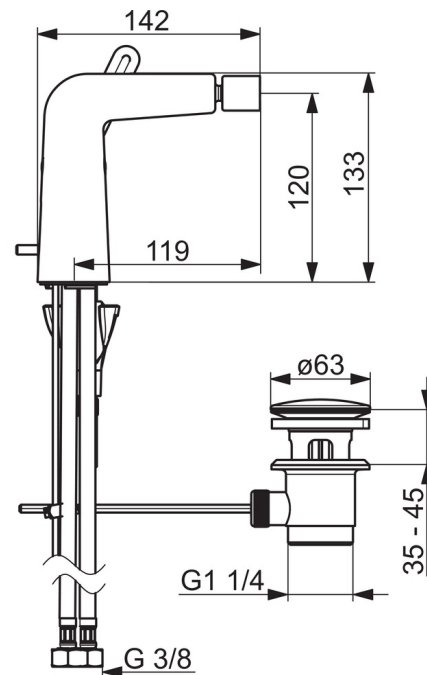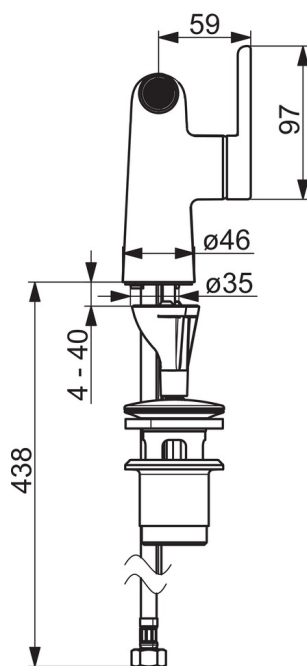

This exploded view diagram illustrates the components of a kitchen faucet assembly. The main faucet body is shown in the center. To its left, a separate hot/cold water handle assembly is depicted, consisting of a cylindrical handle (1) mounted on a base (2) with a central screw (3). Above the faucet handle, three small components are shown: a black O-ring (4), a small black cap (5), and a larger black cap (6). To the right of the faucet handle, a long, thin threaded rod (7) is shown, which is used to secure the faucet handle to the main body. Below the faucet handle, a long, thin vertical rod (8) is shown, which is used to secure the faucet body to the sink. At the bottom of the faucet body, a black plastic foot (9) is shown, which is used to secure the faucet to the sink. The diagram also shows a black plastic foot (10) and a black plastic foot (11) which are used to secure the faucet to the sink. The main faucet body is labeled with the number 12.

	Name	Art.-Nr.
01	Hebel	59914640
02	Blindstopfen	59913762
03	Schraube, M5x8, SW2.5	59904755
04	Abdeckkappe	59914638
05	Gegenmutter, M32x1, SW24	59913958
06	Kartusche, 2.5	59913914
07	Gelenkstück, M18.5x1	59913370
08	Luftsprudler, M18.5x1, TJ	59913366
09	Bodendichtung	59914591
10	Befestigungsschraube, M8x1, L=130	59914474
11	Befestigungssatz	59914475
12	Anschlußschlauch, L=500, M8x1-G3/8 LH	59914467
N.I.	Ablaufgarnitur	59911441
N.I.	Zugstange mit Knopf	59913459