



HANSATWIST

Installation and maintenance guide





UNIDOMO®

Web: www.unidomo.de

Telefon: 04621- 30 60 89 0

Mail: info@unidomo.com

Öffnungszeiten: Mo.-Fr. 8:00-17:00 Uhr

VIESMANN

Buderus

 **Vaillant**

WOLF

 **JUNKERS**  **BOSCH**

 **remeha**

 **DAIKIN**

ROTEX




a member of DAIKIN group



-  Individuelle Beratung
-  Kostenloser Versand
-  Hochwertige Produkte

-  Komplettpakete
-  Über 15 Jahre Erfahrung
-  Markenhersteller

 UNIDOMO®




 UNIDOMO®





0954 2203 , 0954 2205


EN 817
50 - 1000 kPa
0.10 l/s (300 kPa w/Controller)
max. +80°C

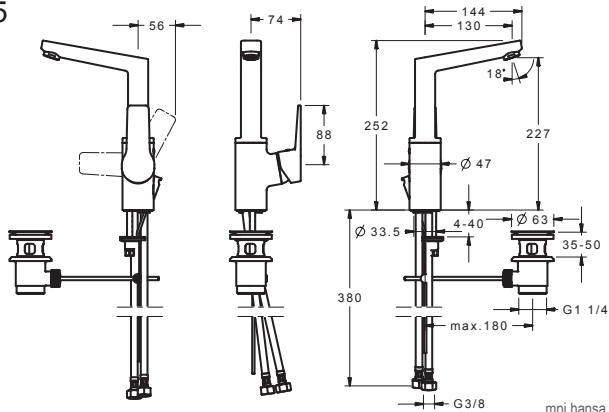

mpi.hansa.com/09542203

0955 2203 , 0955 2205


EN 817
50 - 1000 kPa
0.10 l/s (300 kPa w/Controller)
max. +80°C

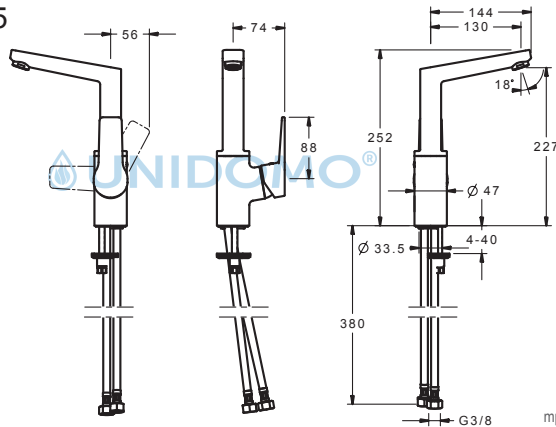

mpi.hansa.com/09552203

0920 2203 , 0920 2205 , 0920 2203 33

EN 817
50 - 1000 kPa
0.20 l/s (300 kPa)
max. +90°C

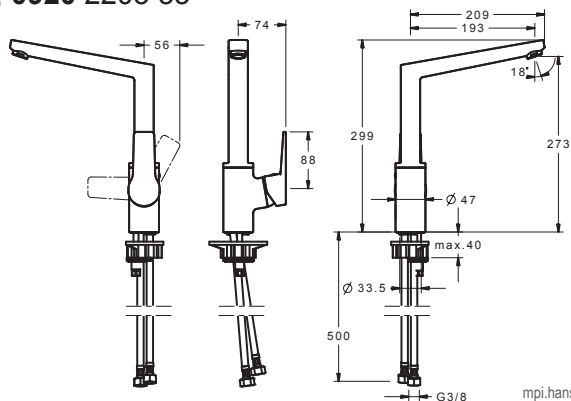


mpi.hansa.com/09202203



0922 1103 , 0922 1105


EN 817
50 - 500 kPa
max. +90°C

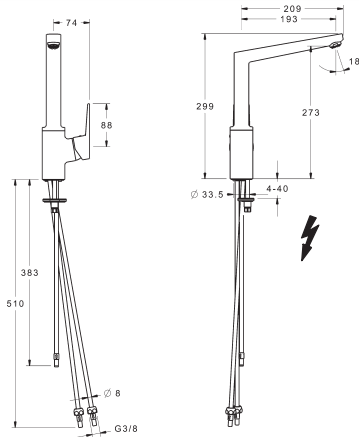

mpi.hansa.com/09221103

0914 2283 , 0914 2285 , 0914 2283 33


EN 817
100 - 1000 kPa
0.20 l/s (300 kPa)
300 kPa (0.2 l/s)
max. +90°C

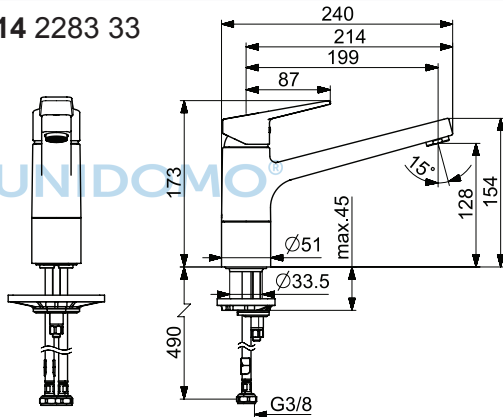

mpi.hansa.com/09142283

0912 1183

EN 817
50 - 500 kPa
max. +90°C

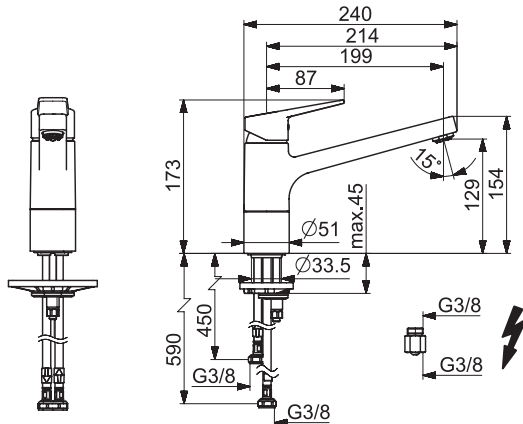


mpi.hansa.com/09121183



0902 2283 , 0902 2285 , 0902 2283 33


I (ISO 3822)
EN 817
100 - 1000 kPa
0.10 l/s (300 kPa w/Controller)
200 kPa (0.1 l/s)
max. +80°C

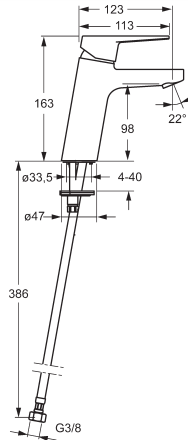

mpi.hansa.com/09022283

0905 2283 , 0905 2285


I (ISO 3822)
EN 817
100 - 1000 kPa
0.10 l/s (300 kPa w/Controller)
200 kPa (0.1 l/s)
max. +80°C

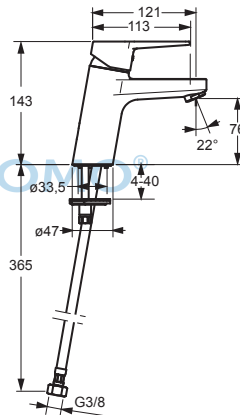

mpi.hansa.com/09052283

0930 2203 , 0930 2205

I (ISO 3822)
EN 817
100 - 1000 kPa
0.10 l/s (300 kPa w/Controller)
200 kPa (0.1 l/s)
max. +80°C

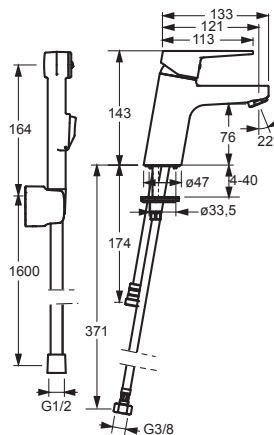


mpi.hansa.com/09302203



0906 3283 , 0906 3285


I (ISO 3822)
 EN 817
 100 - 1000 kPa
 0.15 l/s (300 kPa)
 0.10 l/s (300 kPa w/Controller)
 200 kPa (0.1 l/s)
 max. +80°C

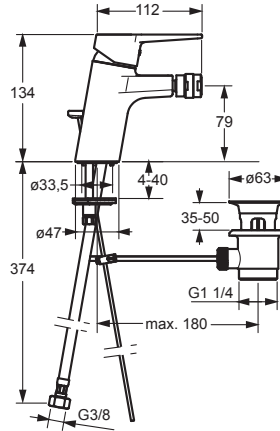

mpi.hansa.com/09063283

0909 2183 , 0909 2185


I(ISO3822)
 EN 817
 50 - 1000 kPa
 0.1 l/s (300 kPa w/Controller)
 max. +90°C

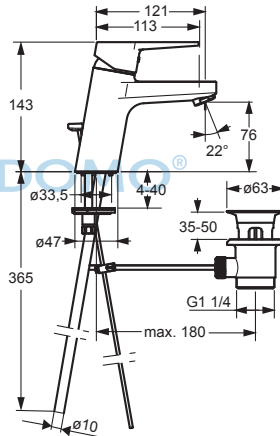

mpi.hansa.com/09092183

0909 2283 , 0909 2285

EN 817
 100 - 1000 kPa
 0.20 l/s (300 kPa)
 300 kPa (0.2 l/s)
 max. +90°C

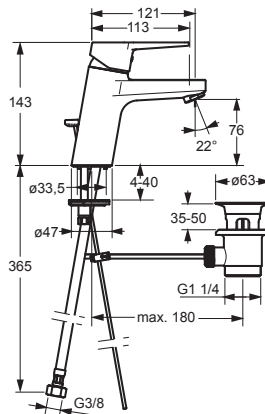


mpi.hansa.com/09092283



0913 1183


EN 817
100 - 500 kPa
max. +90°C

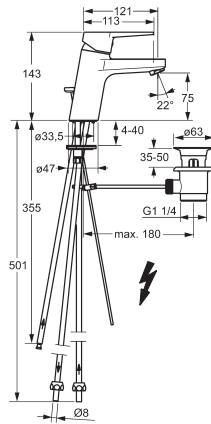

mpi.hansa.com/09131183

0901 2283 , 0901 2285


EN 817
50 - 1000 kPa
0.10 l/s (300 kPa w/Controller)
max. +80°C

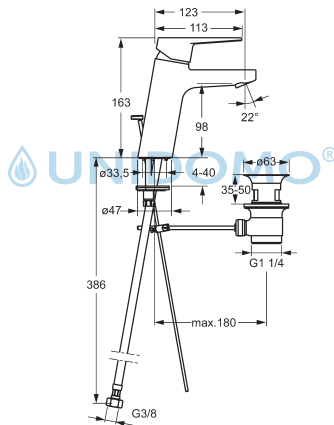

mpi.hansa.com/09012283

0903 1183

EN 817
50 - 500 kPa
max. +90°C


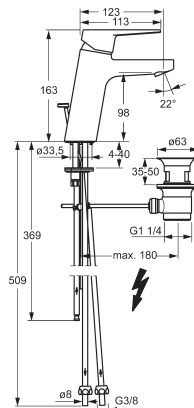


mpi.hansa.com/09031183



0974 2183 , 0974 2185 , 0974 2183 33



I (ISO 3822)
 EN 817
 100 - 1000 kPa
 0.34 / 0.32 l/s (300 kPa)
 250 kPa (0.3 l/s)
 max. +90°C

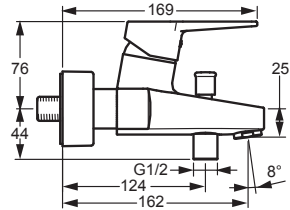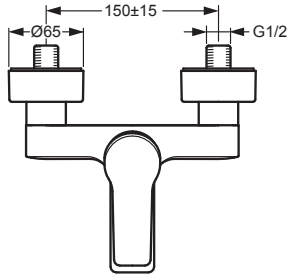

mpi.hansa.com/09742183

0967 0183 , 0967 0185 , 0967 0183 33



I (ISO 3822)
 EN 817
 100 - 1000 kPa
 0.28 l/s (300 kPa)
 160 kPa (0.2 l/s)
 max. +90°C

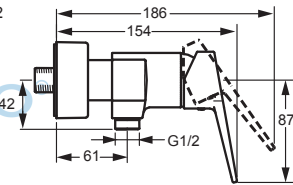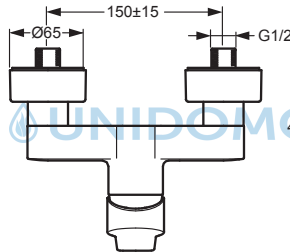




mpi.hansa.com/09670183

0969 2193 , 0969 2195





EN 817
 100 - 1000 kPa
 0.22 l/s (300 kPa)
 max. +90°C

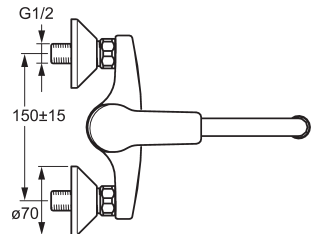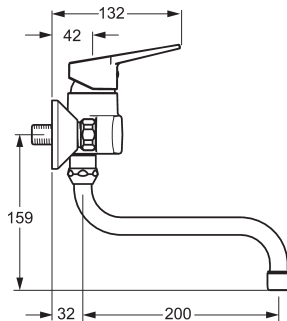

mpi.hansa.com/09692193



max.
1600 kPa


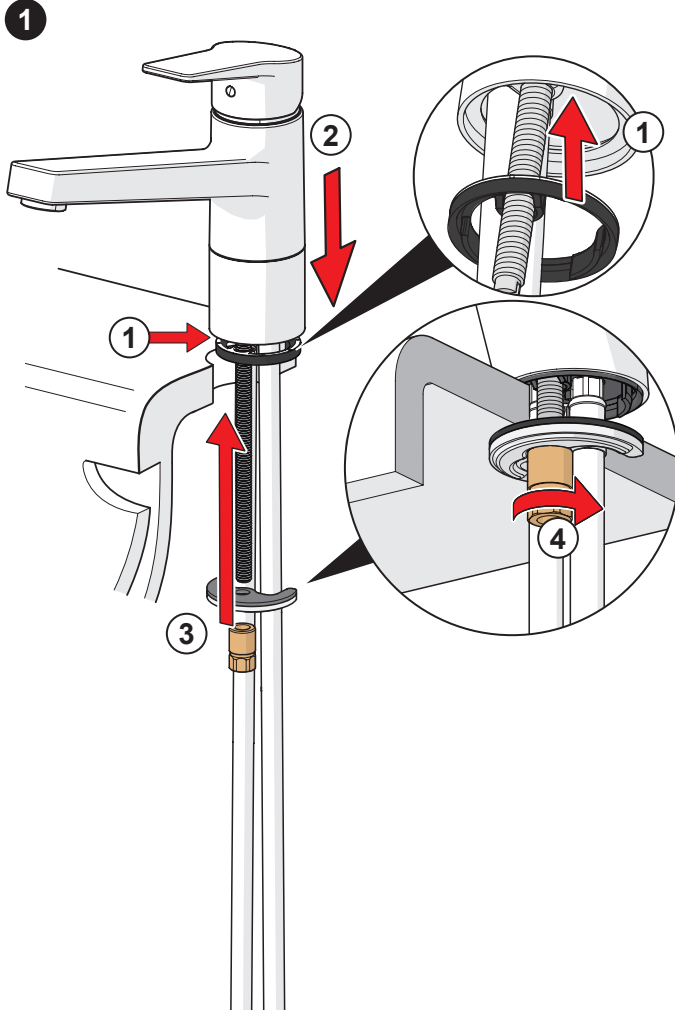
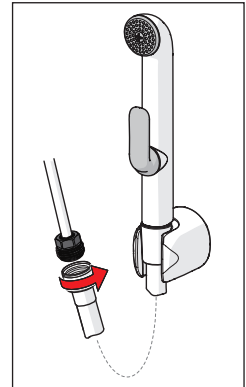








19

①



②



UNIDOMO®



UNIDOM

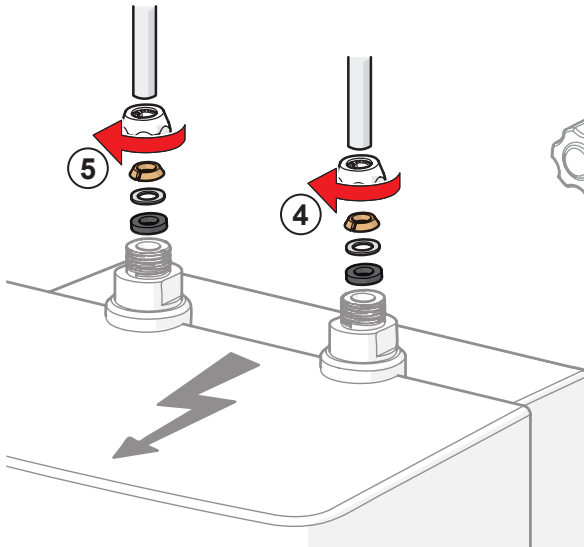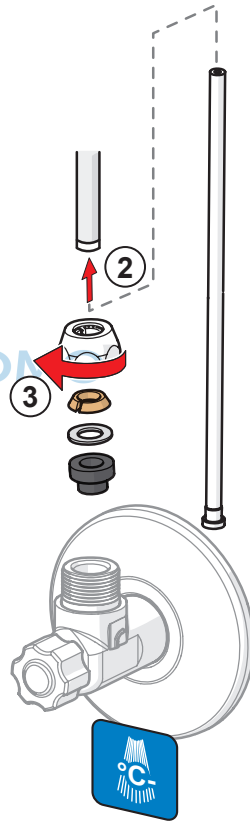




19



①②③④


B




②




①




 UNIDOMO

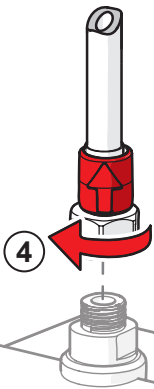


④





③




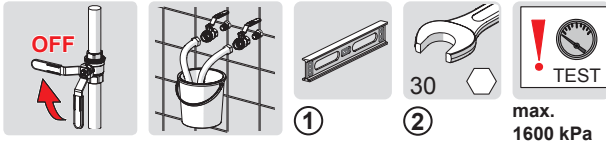


max.
1600 kPa


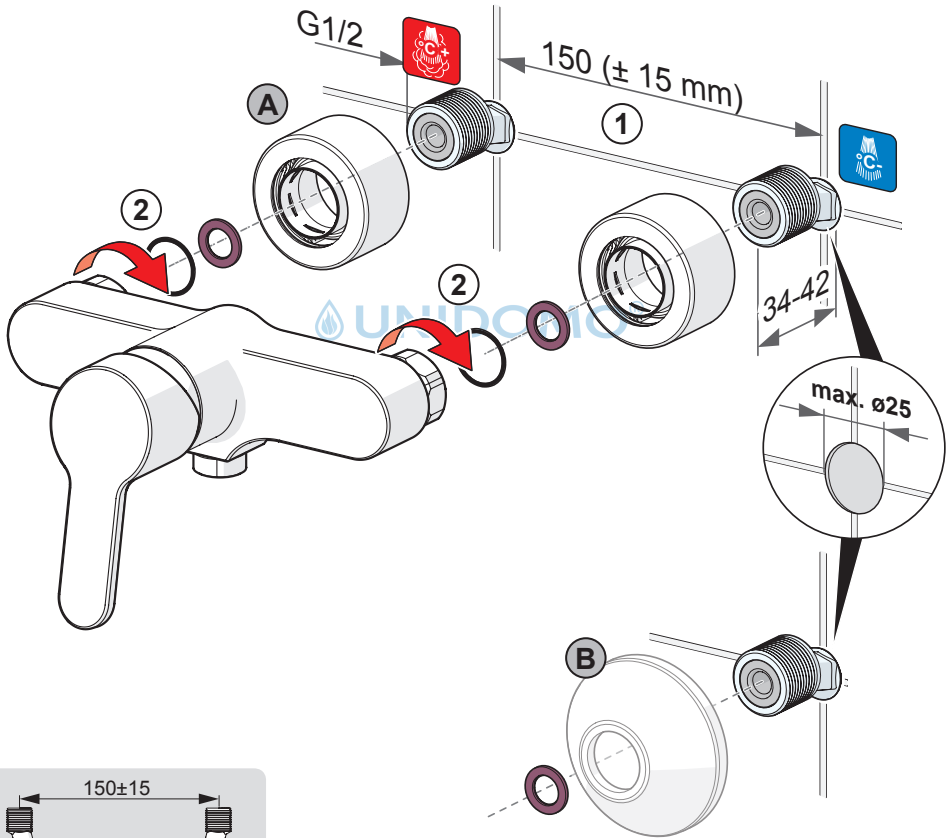






① ② ③

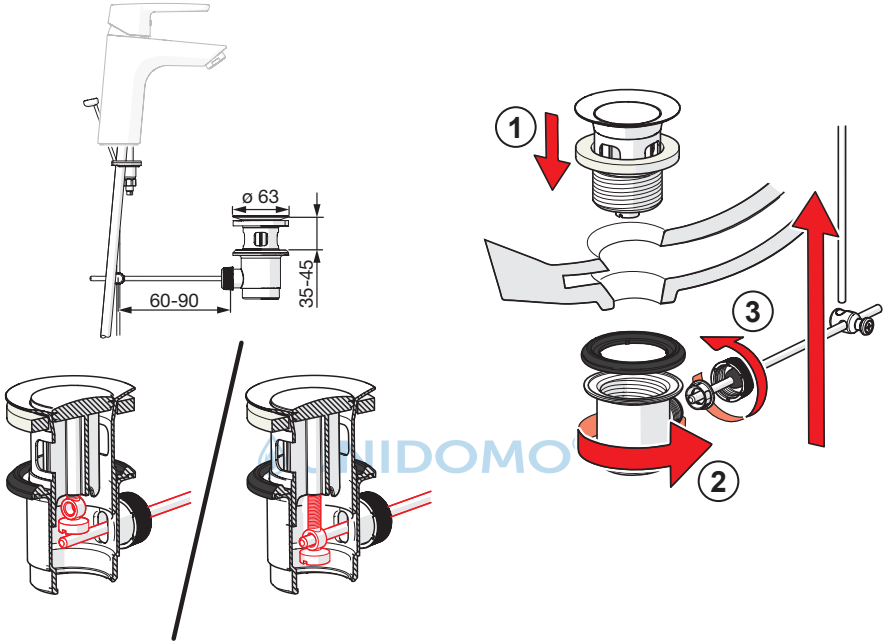

①

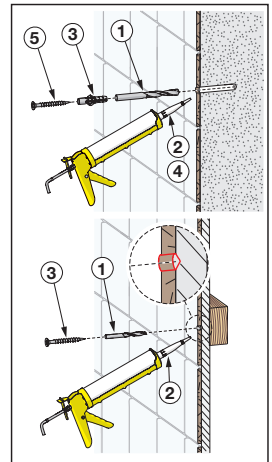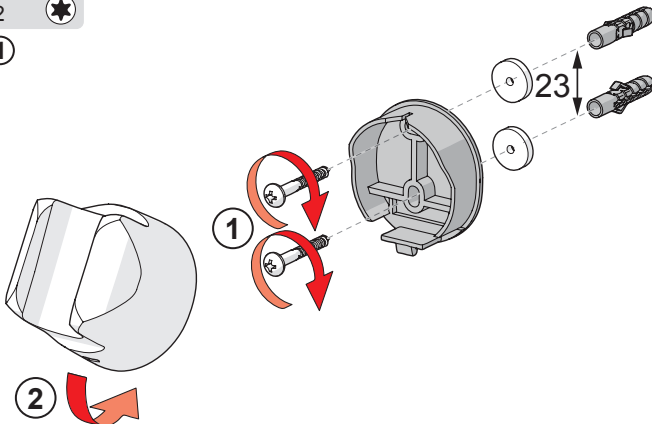



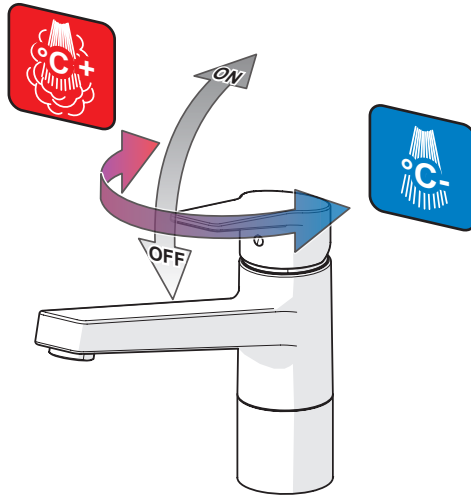


UNIDOMO®



2.5

② ⑥

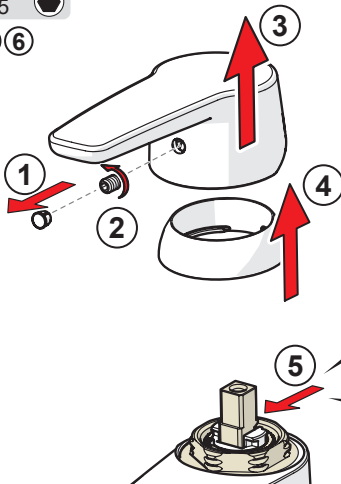




2.5


②




A



A





A
















A




B

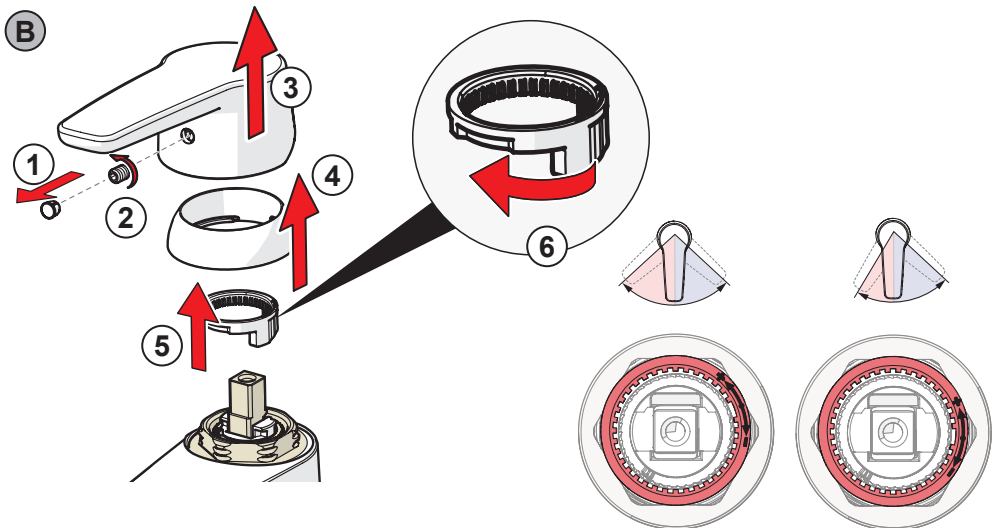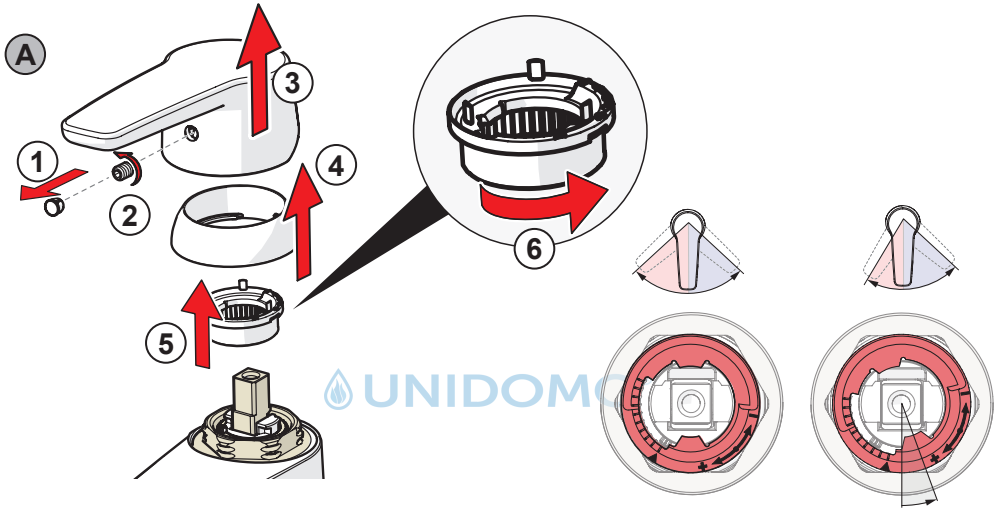

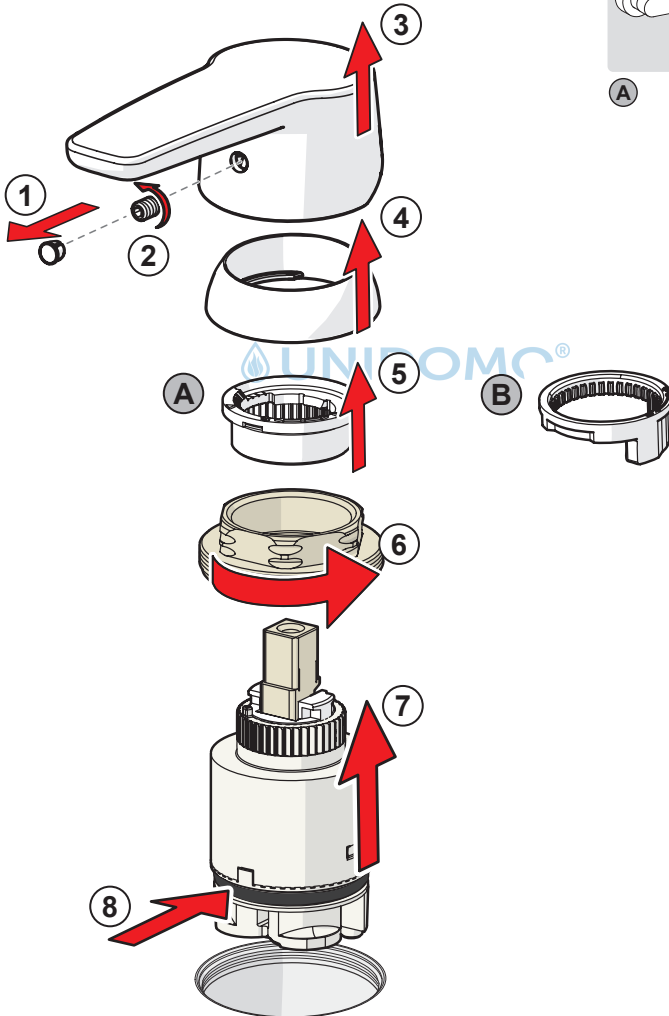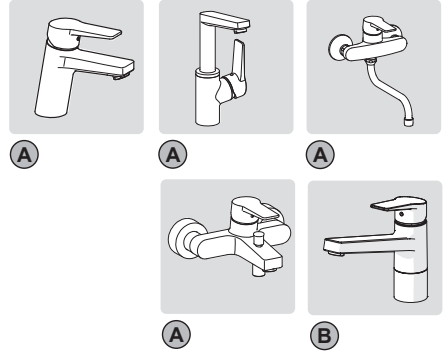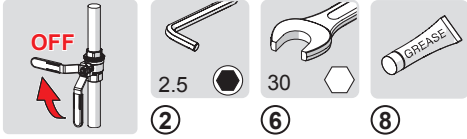

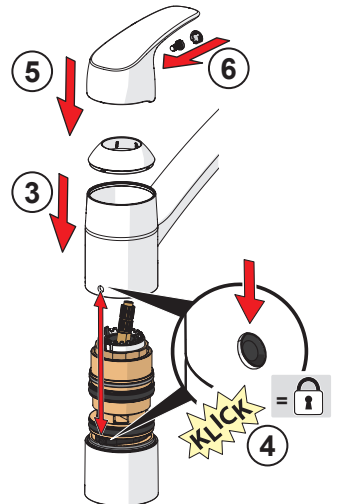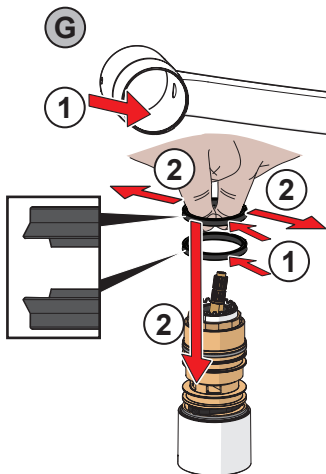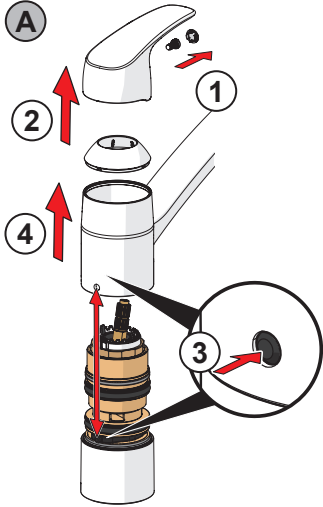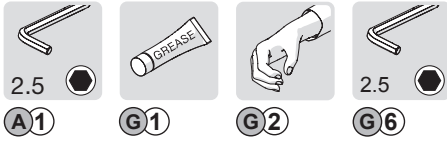








① ②

③

③

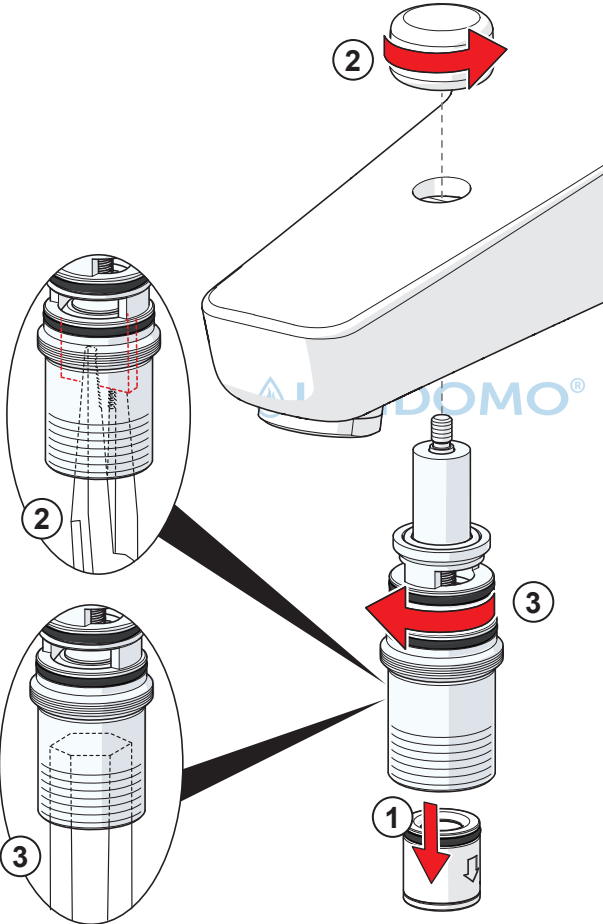

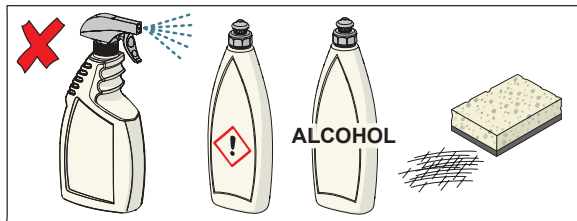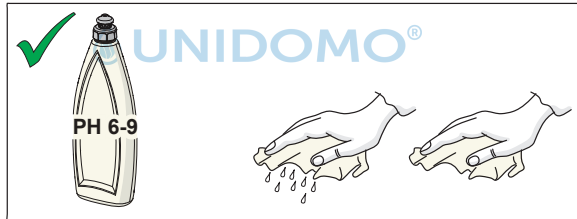

CLEANING.HANSA.COM

 UNIDOMO®

 UNIDOMO®



UNIDOMO®

Web: www.unidomo.de

Telefon: 04621- 30 60 89 0

Mail: info@unidomo.com

Öffnungszeiten: Mo.-Fr. 8:00-17:00 Uhr

VIESSMANN

Buderus

 **Vaillant**

WOLF

 **JUNKERS**  **BOSCH**

 **remeha**

 **DAIKIN**

ROTEX

a member of DAIKIN group



-  Individuelle Beratung
-  Kostenloser Versand
-  Hochwertige Produkte

-  Komplettpakete
-  Über 15 Jahre Erfahrung
-  Markenhersteller

Oras Group is a powerful European provider of sanitary fittings: the market leader in the Nordics and a leading company in Continental Europe. The company's mission is to make the use of water easy and sustainable and its vision is to become the European leader of advanced sanitary fittings. Oras Group has two strong brands: Oras and Hansa.

The Group's head office is located in Rauma, Finland, and the Group has three manufacturing sites: Kralovice (Czech Republic), Olesno (Poland) and Rauma (Finland). Oras Group employs approximately 1,200 people in twenty countries. Oras Group is owned by Oras Invest, a family company and an industrial owner.



HANSA Armaturen GmbH
P. O. BOX 81 02 40
D-70519 Stuttgart
Sigmaringer Strasse 107
D-70567 Stuttgart
Tel.: +49 711 16 14 0
Fax: +49 711 16 14 368
info@hansa.de
www.hansa.com



943374D-08-20