



HANSA

Installation and maintenance guide





Web: www.unidomo.de

Telefon: 04621- 30 60 89 0

Mail: info@unidomo.com

Öffnungszeiten: Mo.-Fr. 8:00-17:00 Uhr

VIESSMANN



 **Vaillant**

WOLF

 **JUNKERS**  **BOSCH**

 **remeha**

 **DAIKIN**

ROTEX
a member of DAIKIN group



-  Individuelle Beratung
-  Kostenloser Versand
-  Hochwertige Produkte

-  Komplettpakete
-  Über 15 Jahre Erfahrung
-  Markenhersteller






4-10



11-14



14



15-20




21

 **UNIDOMO®**

**5148 2293**


I(ISO3822)
EN 817
50 - 1000 kPa
0.20 l/s (300 kPa)
max. +80°C

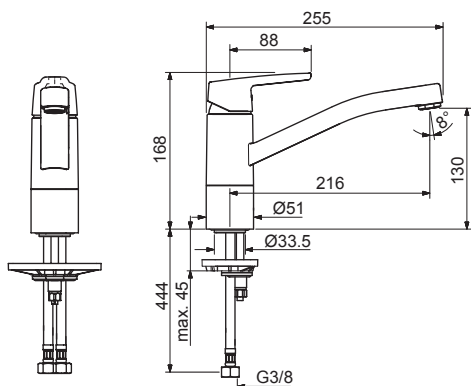

mpi.hansa.com/51482293

5266 2293


I(ISO3822)
EN 817
50 - 1000 kPa
0.20 l/s (300 kPa)
max. +80°C

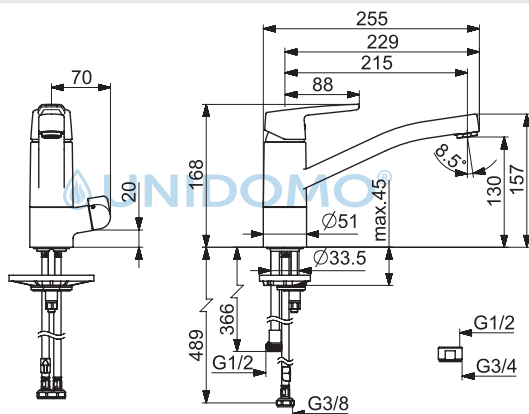

mpi.hansa.com/52662293

5159 1193



I (ISO 3822)
EN 817
50 - 1000 kPa
0.20 l/s (300 kPa)
max. +80°C

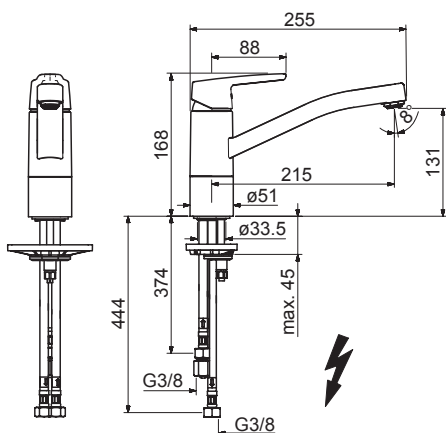

mpi.hansa.com/51591193

5156 2293




I(ISO3822)
EN 817
50 - 500 kPa
0.12 l/s (300 kPa)
max. +80°C

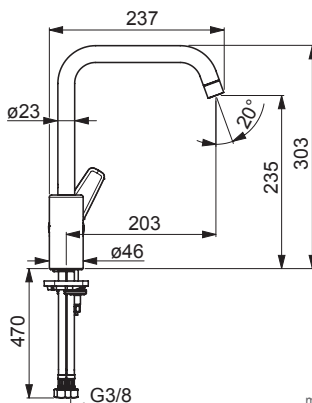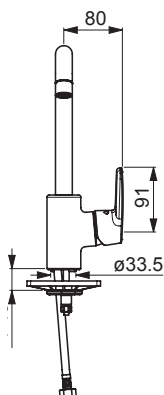

mpi.hansa.com/51562293

5160 2293



EN 817
50 - 1000 kPa
0.20 l/s (300 kPa)
max. +80°C

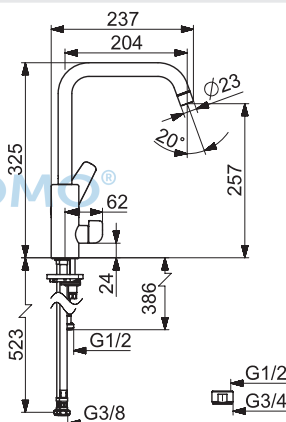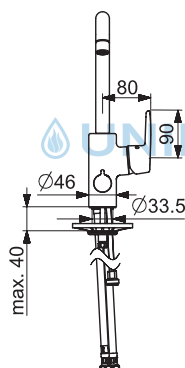

mpi.hansa.com/51602293

5270 2293



EN 817
50 - 1000 kPa
0.20 l/s (300 kPa)
max. +80°C

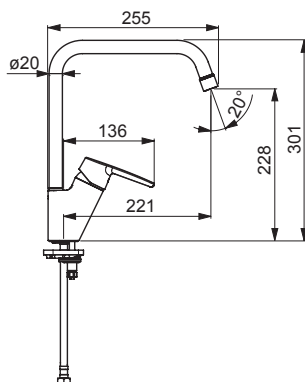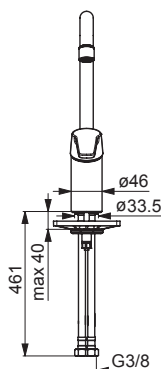

mpi.hansa.com/52702293

**5156 2293 0037**



EN 817
50 - 1000 kPa
0.17 l/s (300 kPa)
max. +80°C

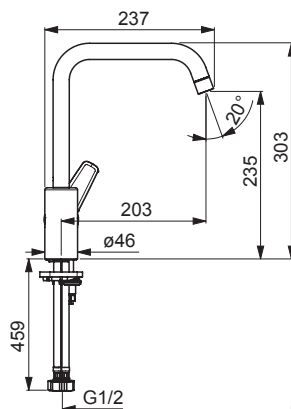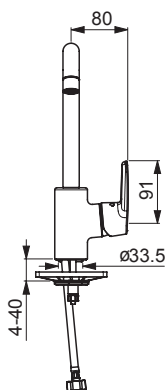

mpi.hansa.com/515622930037

5148 2293 0037



EN 817
50 - 1000 kPa
0.12 l/s (300 kPa)
max. +80°C

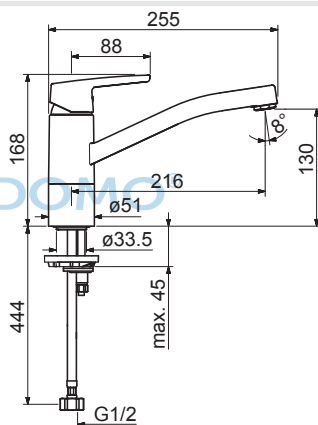

mpi.hansa.com/514822930037

5148 2293 00676


EN 817
50 - 1000 kPa
0.12 l/s (300 kPa)
max. +80°C

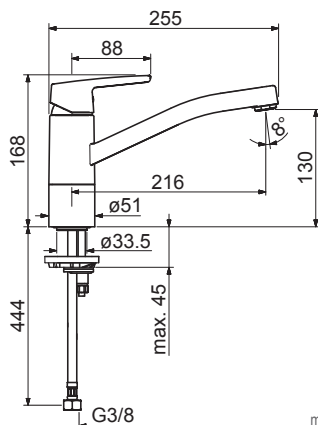

mpi.hansa.com/5148229300676

5653 2203


EN 817
50 - 1000 kPa
0.2 l/s (300 kPa)
max. +80°C

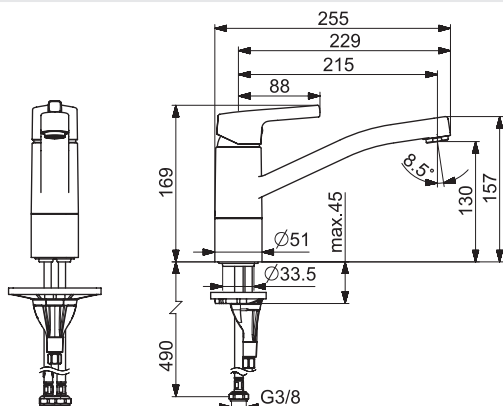

mpi.hansa.com/56532203

5654 2203


I(ISO3822)
EN 817
50 - 1000 kPa
0.20 l/s (300 kPa)
max. +80°C

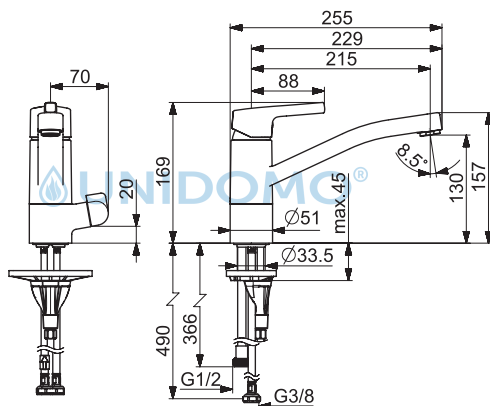

mpi.hansa.com/56542203

5650 2203


I(ISO3822)
EN 817
50 - 1000 kPa
0.15 l/s (300 kPa)
max. +90°C

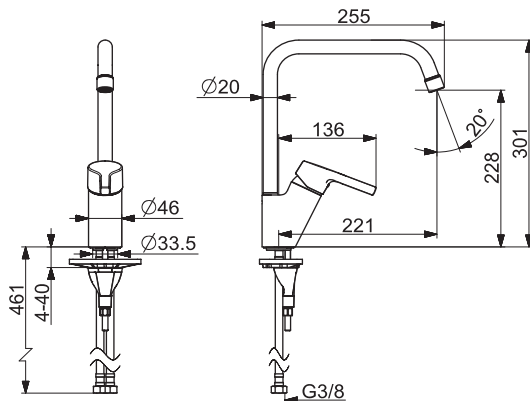

mpi.hansa.com/56502203

**5648 1103**


I(ISO3822)
EN 817
50 - 1000 kPa
0.2 l/s (300 kPa)
max. +90°C

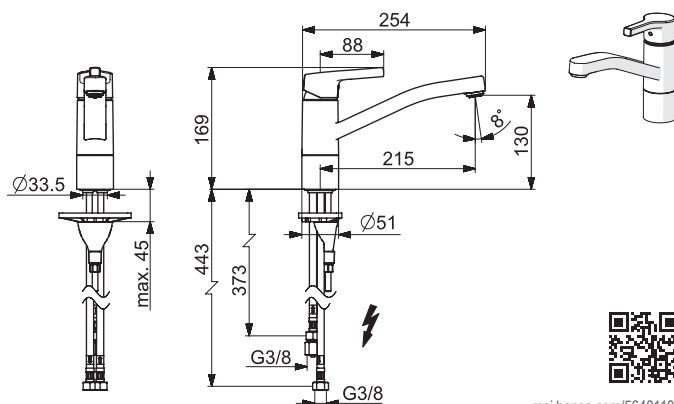

mpi.hansa.com/56481103

5652 2203


I(ISO3822)
EN 817
50 - 500 kPa
0.08 l/s (300 kPa)
max. +80°C

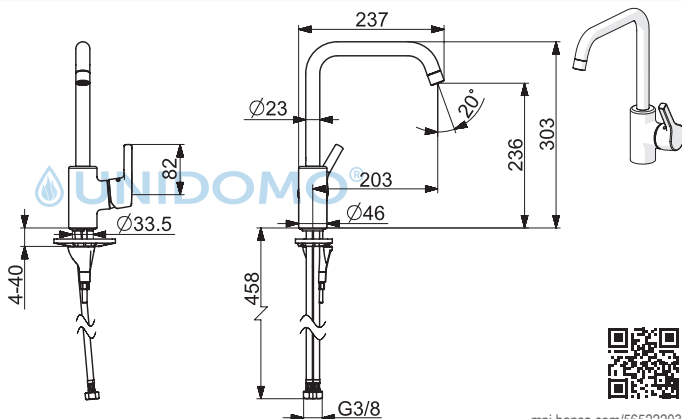

mpi.hansa.com/56522203

5649 2203



I(ISO3822)
EN 817
50 - 1000 kPa
0.2 l/s (300 kPa)
max. +90°C

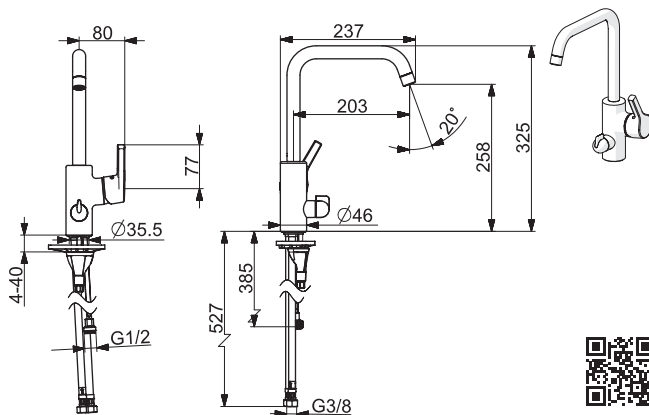

mpi.hansa.com/56492203

5653 2203 0037



I(ISO3822)
EN 817
50 - 1000 kPa
0.1 l/s (300 kPa w/Controller)
max. +90°C

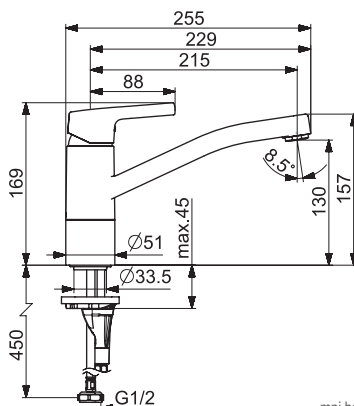

mpi.hansa.com/565322030037

4609 2273



EN 817
50 - 1000 kPa
0.20 l/s (300 kPa)
max. +90°C

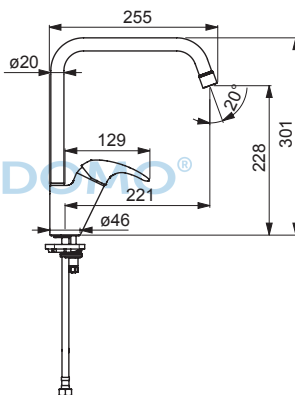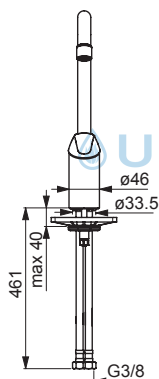

mpi.hansa.com/46092273

4608 2273 0037



I (ISO 38229 Oras lab.)
EN 817
100 - 1000 kPa
0.2 l/s (300 kPa)
max. +90°C

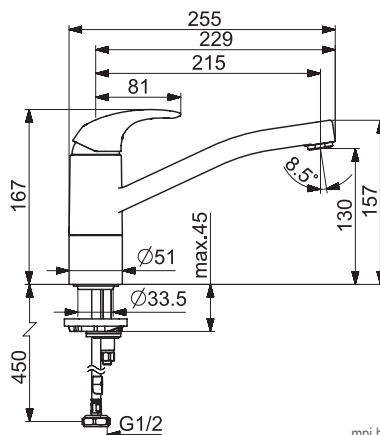

mpi.hansa.com/460822730037



**4608 2273**

EN 817
50 - 1000 kPa
0.20 l/s (300 kPa)
max. +90°C


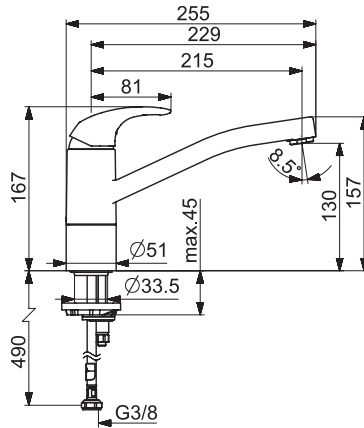









mpi.hansa.com/46082273

 **UNIDOMO®**





A

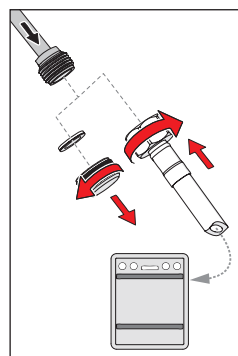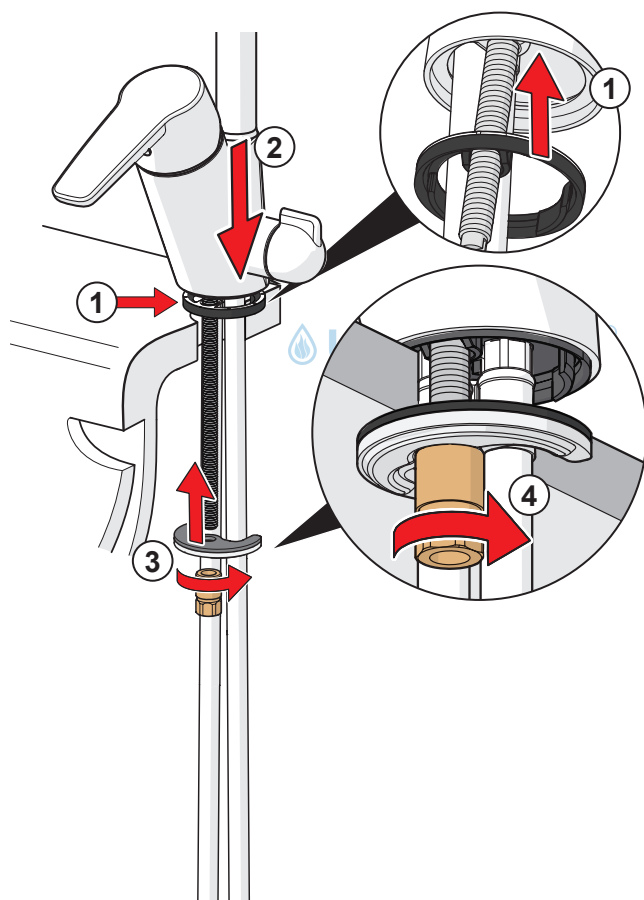

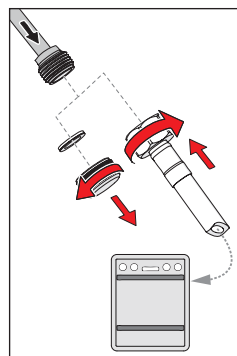


B



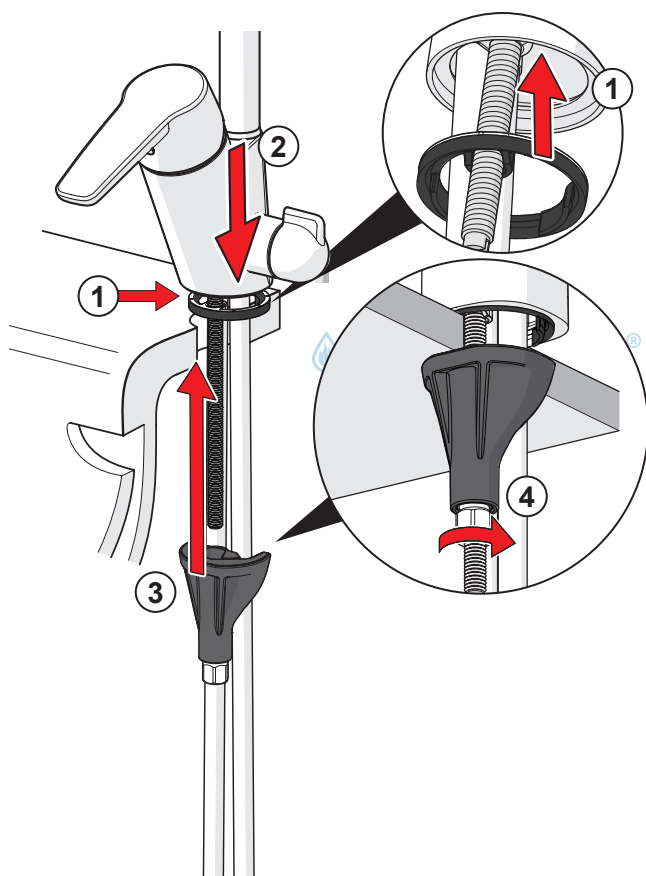





2

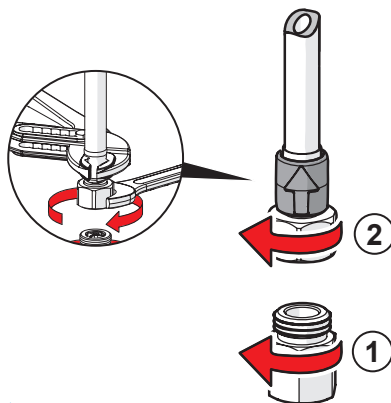

UNIDOMO®

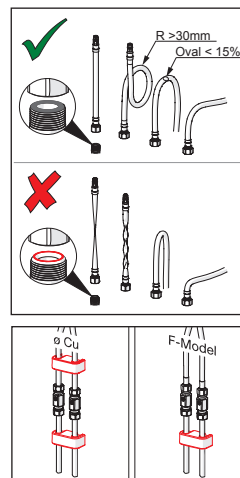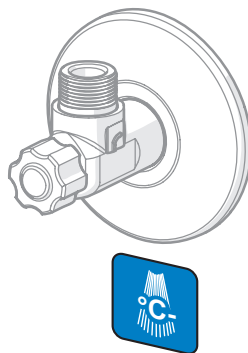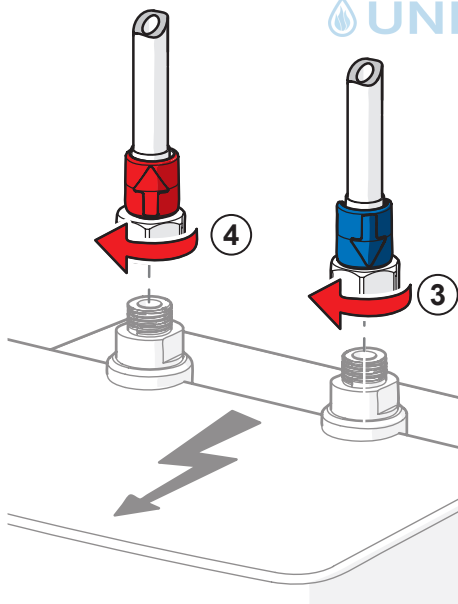



19








max.
1600 kPa




①

2

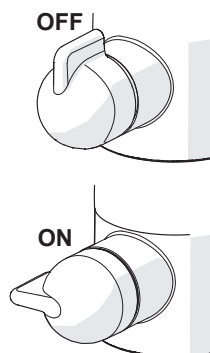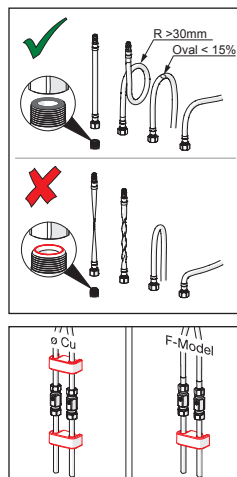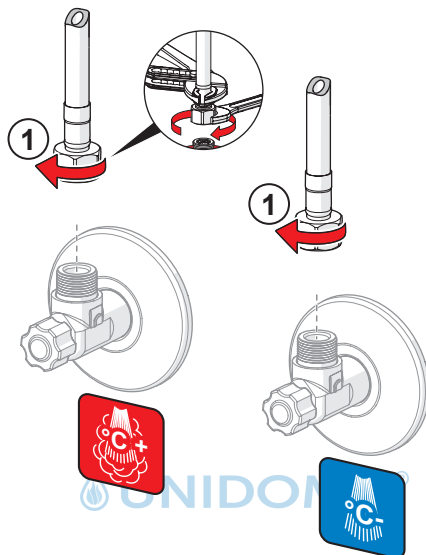



②

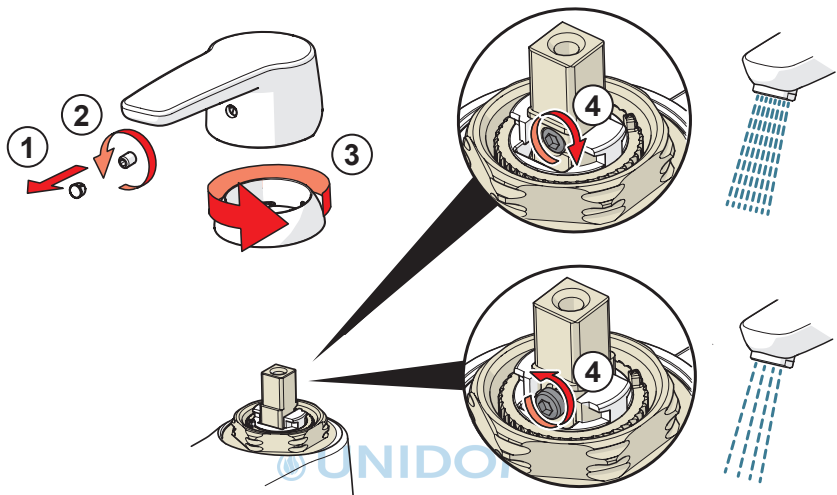



②





A







A



B

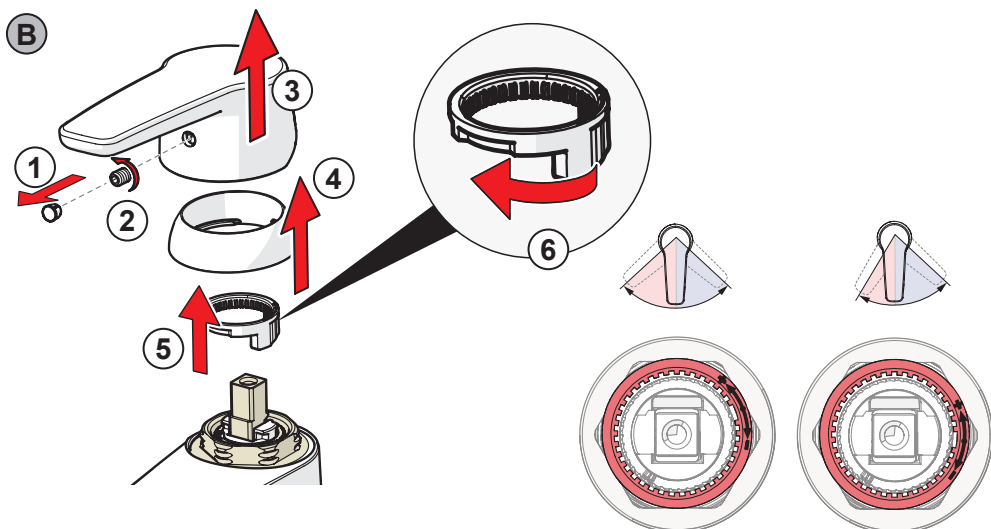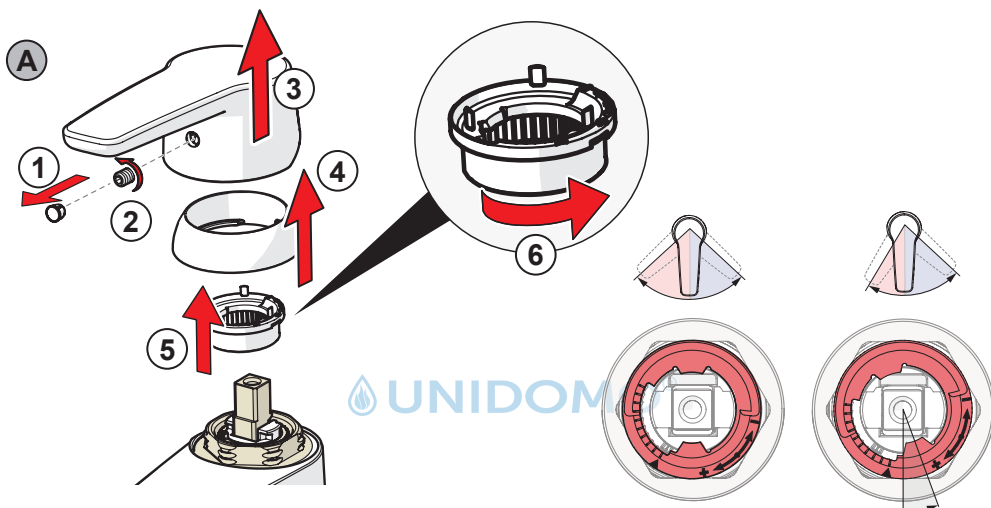

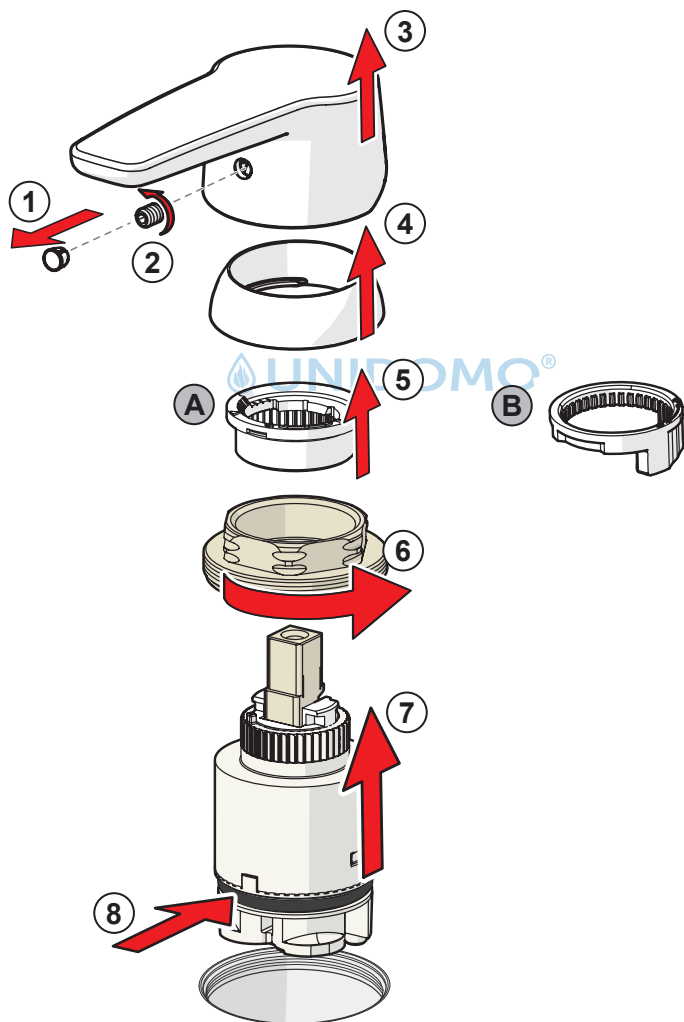




A1











G1




G2







G6

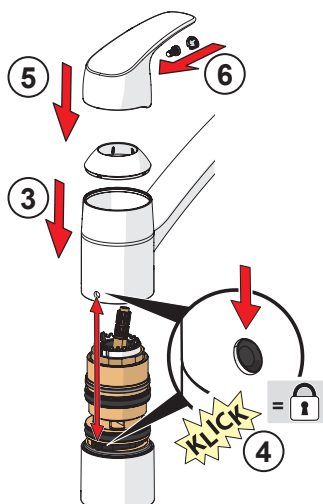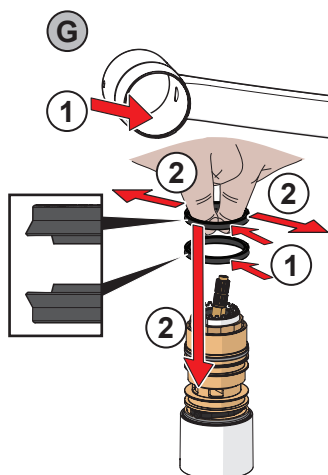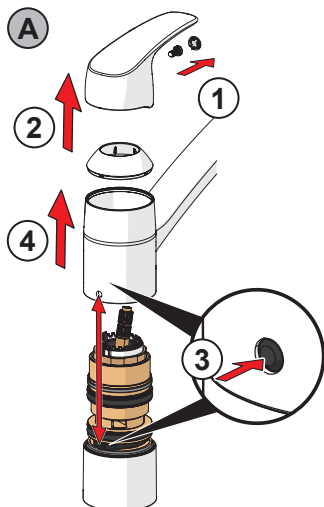








③

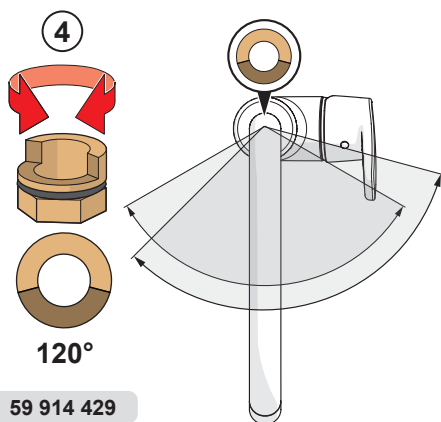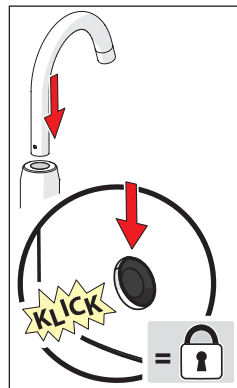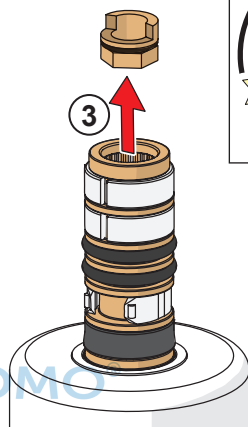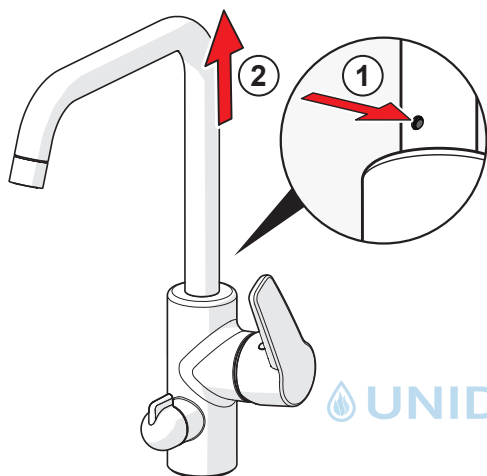


59 914 429

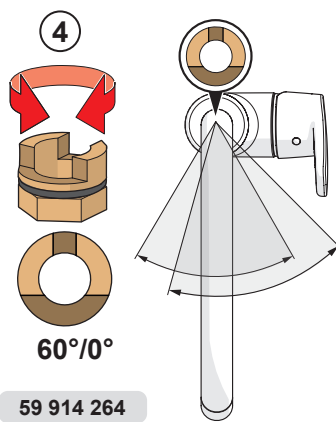

59 914 264

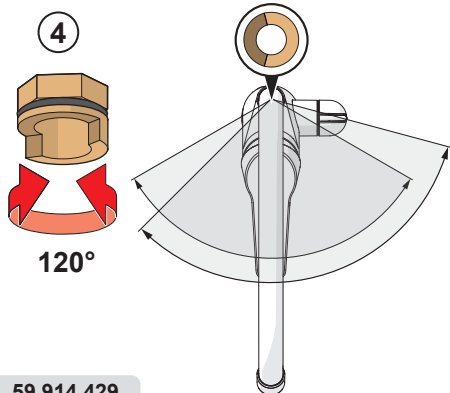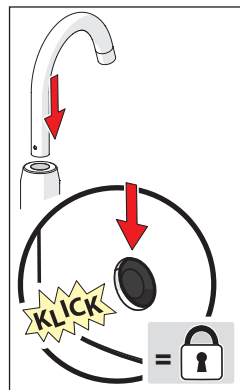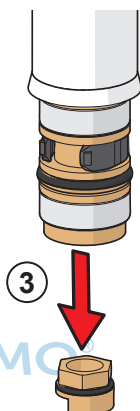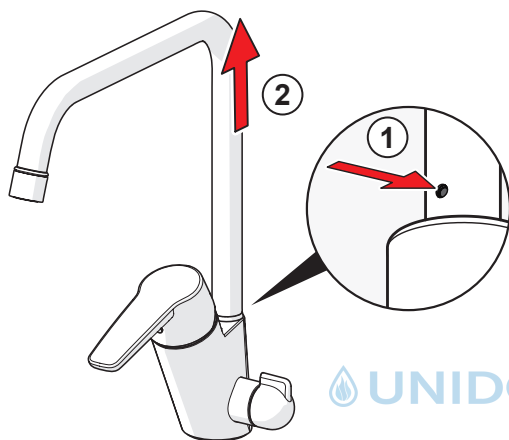


59 914 429

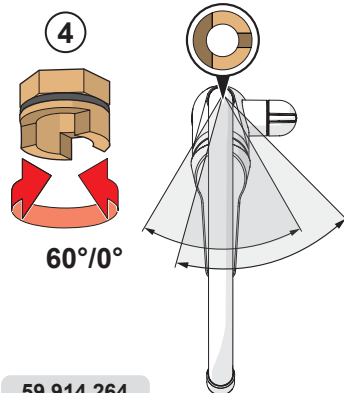


59 914 264







1

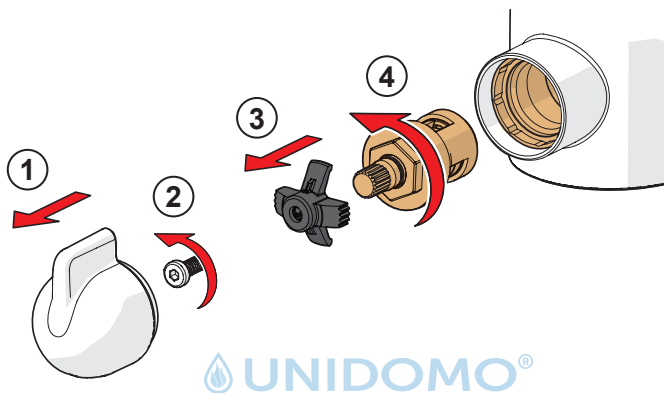


2

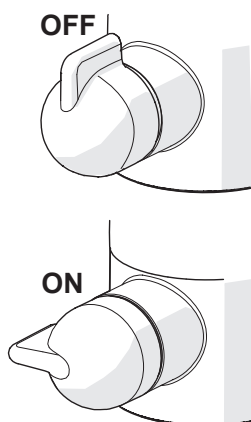

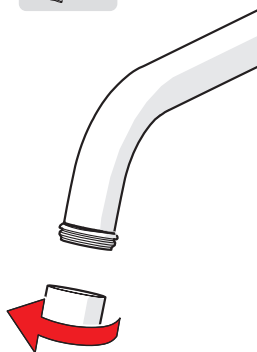

 **UNIDOMO®**

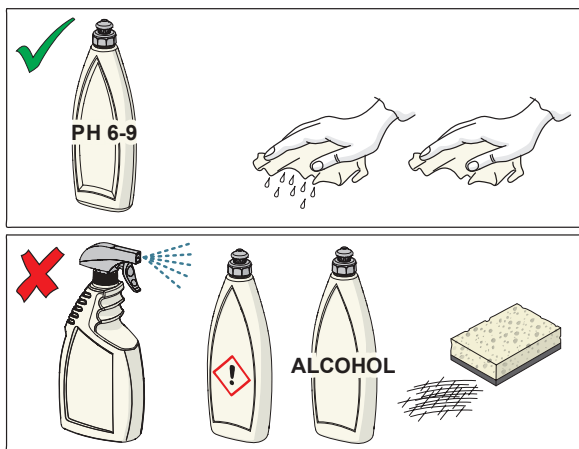

CLEANING.HANSA.COM





Web: www.unidomo.de

Telefon: 04621- 30 60 89 0

Mail: info@unidomo.com

Öffnungszeiten: Mo.-Fr. 8:00-17:00 Uhr

VIESSMANN



 **Vaillant**

WOLF

 **JUNKERS**  **BOSCH**

 **remeha**

 **DAIKIN**

ROTEX
a member of DAIKIN group



-  Individuelle Beratung
-  Kostenloser Versand
-  Hochwertige Produkte

-  Komplettpakete
-  Über 15 Jahre Erfahrung
-  Markenhersteller

Oras Group is a powerful European provider of sanitary fittings: the market leader in the Nordics and a leading company in Continental Europe. The company's mission is to make the use of water easy and sustainable and its vision is to become the European leader of advanced sanitary fittings. Oras Group has two strong brands: Oras and Hansa.

The Group's head office is located in Rauma, Finland, and the Group has three manufacturing sites: Kralovice (Czech Republic), Olesno (Poland) and Rauma (Finland). Oras Group employs approximately 1,200 people in twenty countries. Oras Group is owned by Oras Invest, a family company and an industrial owner.



HANSA Armaturen GmbH
P. O. BOX 81 02 40
D-70519 Stuttgart
Sigmaringer Strasse 107
D-70567 Stuttgart
Tel.: +49 711 16 14 0
Fax: +49 711 16 14 368
info@hansa.de
www.hansa.com



943376D-08-20