


Wichtiger Montagehinweis



Bei ausziehbaren Ausläufen mit NEOPERL-Komfortstrahl sind im Bereich A Luftansaugschlitze. Daher muß der Auslauf möglichst im 90° Winkel montiert werden (max. Abweichung 6°). Es besteht sonst die Gefahr, daß bei geschlossener bzw. bei leicht geöffneter Armatur Wasser durch die Ansaugschlitze austritt. Das Auslaufende muß immer frei sein – bitte nicht in Wasserbehälter eintauchen.

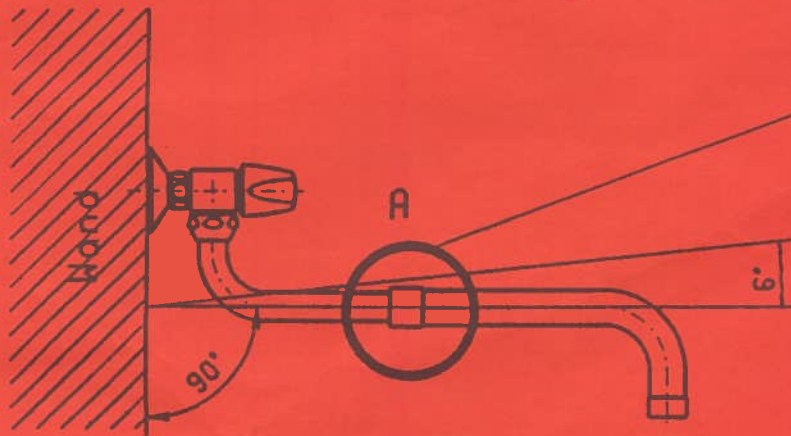

Web: www.unidomo.de

Telefon: 04621- 30 60 89 0

Mail: info@unidomo.com

Öffnungszeiten: Mo.-Fr. 8:00-17:00 Uhr

VIESSMANN



 **Vaillant**

WOLF

 **JUNKERS**  **BOSCH**

 **remeha**

 **DAIKIN**

ROTEX
a member of DAIKIN group



Individuelle Beratung



Kostenloser Versand



Hochwertige Produkte



Komplettpakete




Über 15 Jahre Erfahrung



Markenhersteller

IMPORTANT INSTALLATION INSTRUCTIONS

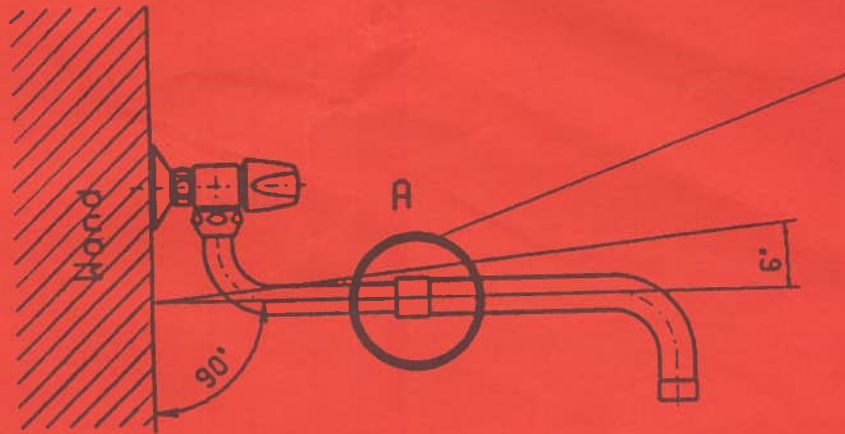

Dear Installer:

The unique telescopic spout on this fitting has a special NEOPERL soft-flow aerator with air-intake slots located in the coupling (see „A” in drawing). To operate correctly, the fitting must be installed with the spout at a 90° angle to the finished wall. If not installed properly, water may drip from the air-intake slots at „A” when the fitting is set to low water volume.

Under no circumstances should the spout be submersed in water during use.