



27 - A 963410 NU

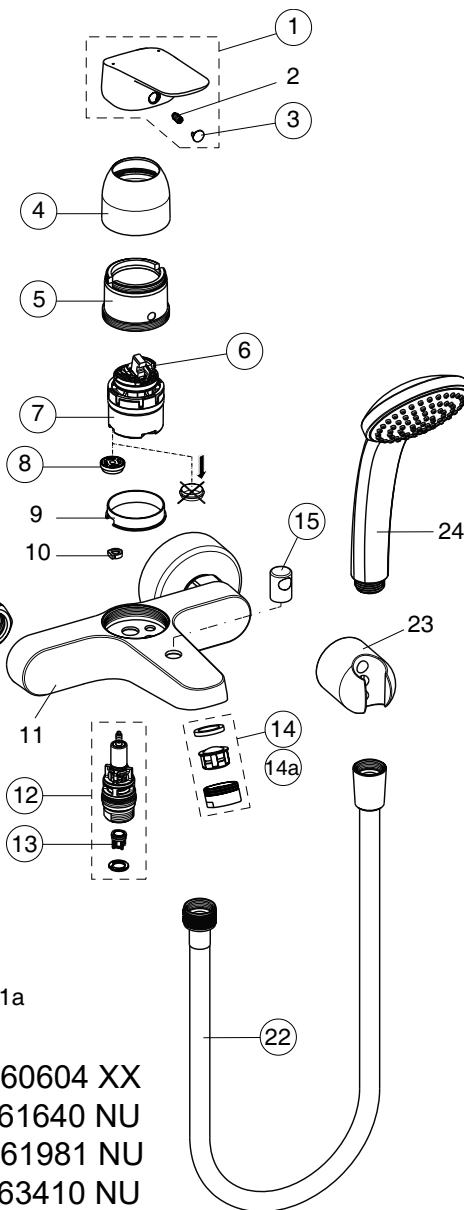

Ideal Standard


CERAFLEX

11.2024 / B665583




B 1719 ..

B 1720 ..



Technical drawing of the front view of a mechanical part. The drawing shows a cylindrical component with a central hole and a flange. Dimensions and tolerances are indicated:

- Overall width: 162-171
- Flange width: 118-127
- Flange thickness: 44
- Central hole diameter: $\varnothing 70$
- Flange hole diameter: $G1/2$
- Top flange width: 79
- Top flange thickness: 80
- Top flange hole diameter: $G1/2$
- Top flange hole offset: 23
- Top flange hole diameter: 95




B 1721 ..

B 1722 ..

B C952 . .

B C957 . .



Ideal Standard International NV
Corporate Village – Gent Building
Da Vincilaan 2
1935 Zaventem
Belgium
<https://www.idealstandard.com>





Ihr Online-Fachhändler für:

- Kostenlose und individuelle Beratung
- Hochwertige Produkte
- Kostenloser und schneller Versand
- TOP Bewertungen
- Exzelerter Kundenservice
- Über 20 Jahre Erfahrung



E-Mail: info@unidomo.de | Tel.: 04621 - 30 60 89 0 | www.unidomo.de

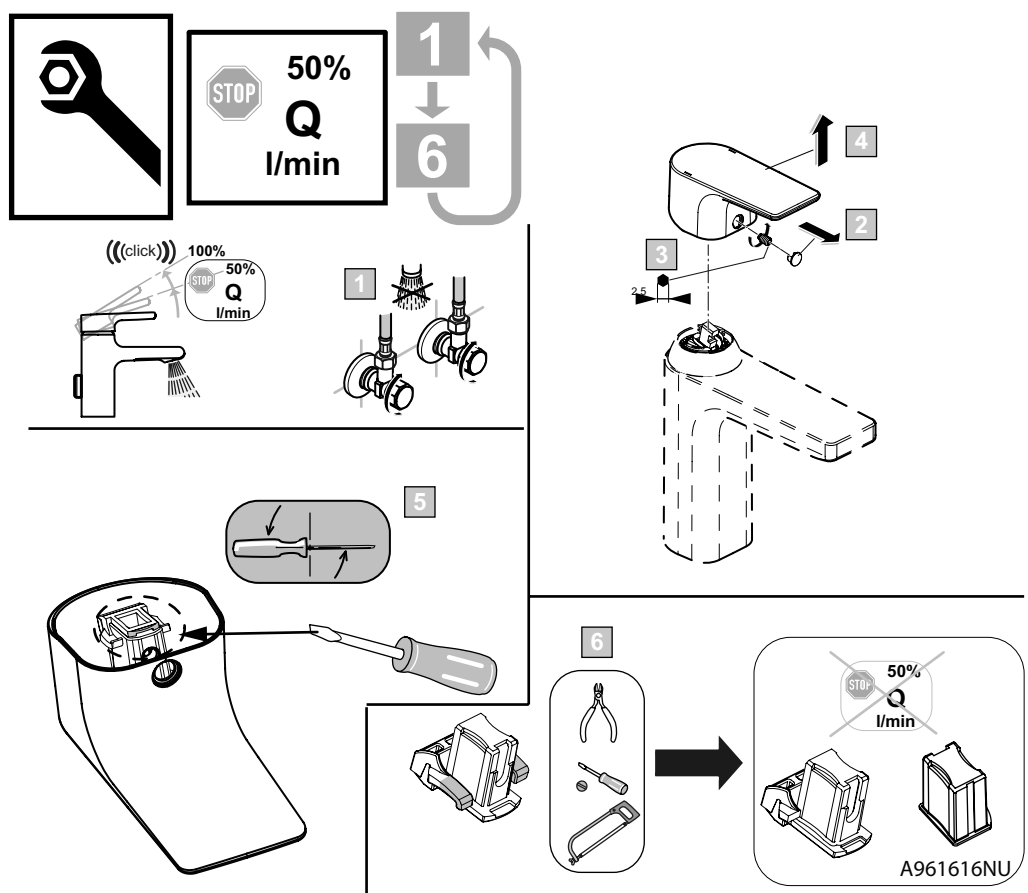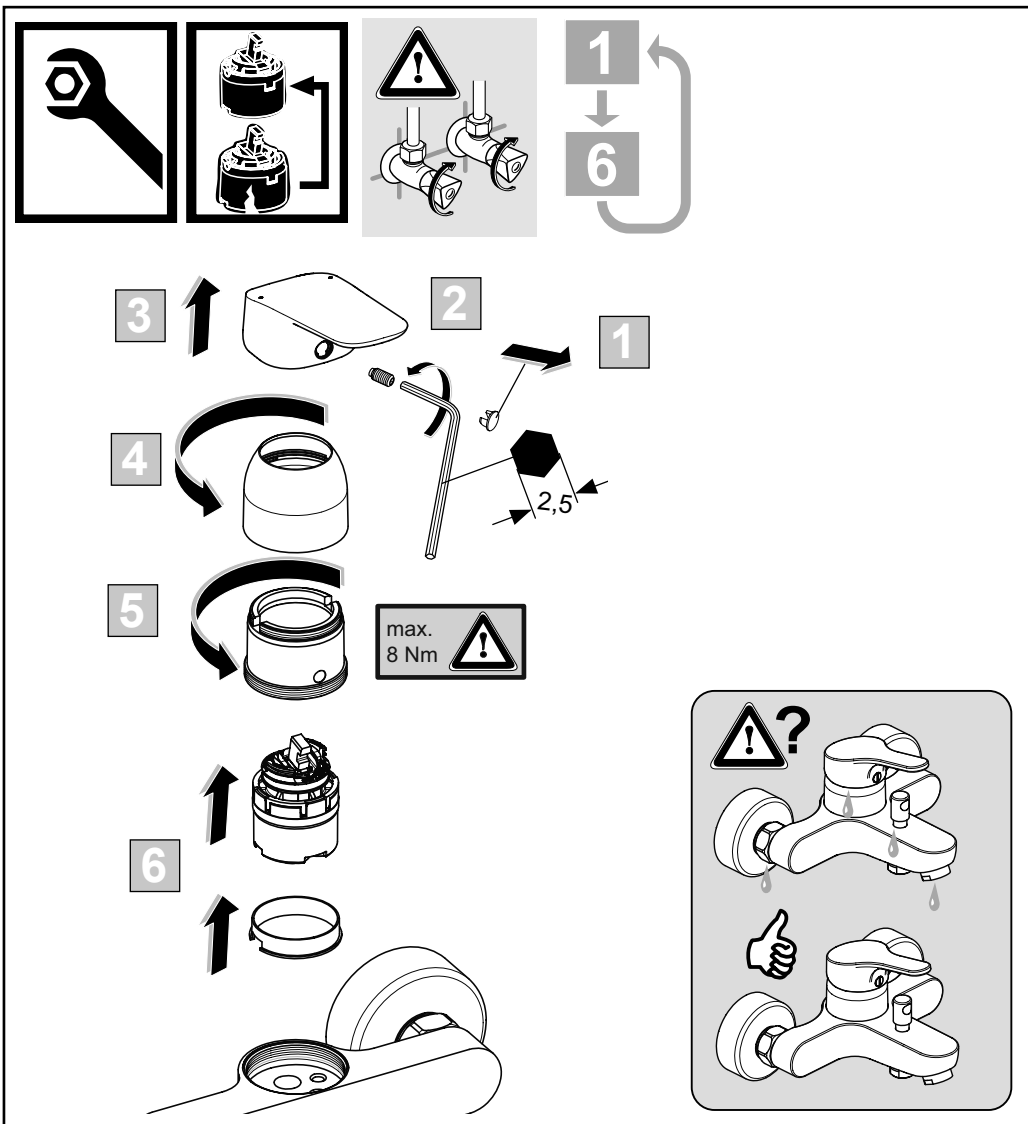

 P	bar	 0,5	MAX. 10	 1	5		  Q (3 bar) l/min 20/8 13/8
 T	°C		MAX. 80		65		
					40		