



# Mono HT R290 Fundamentplan


 Wichtig: Außengerät Lot- und Waagrecht ausrichten

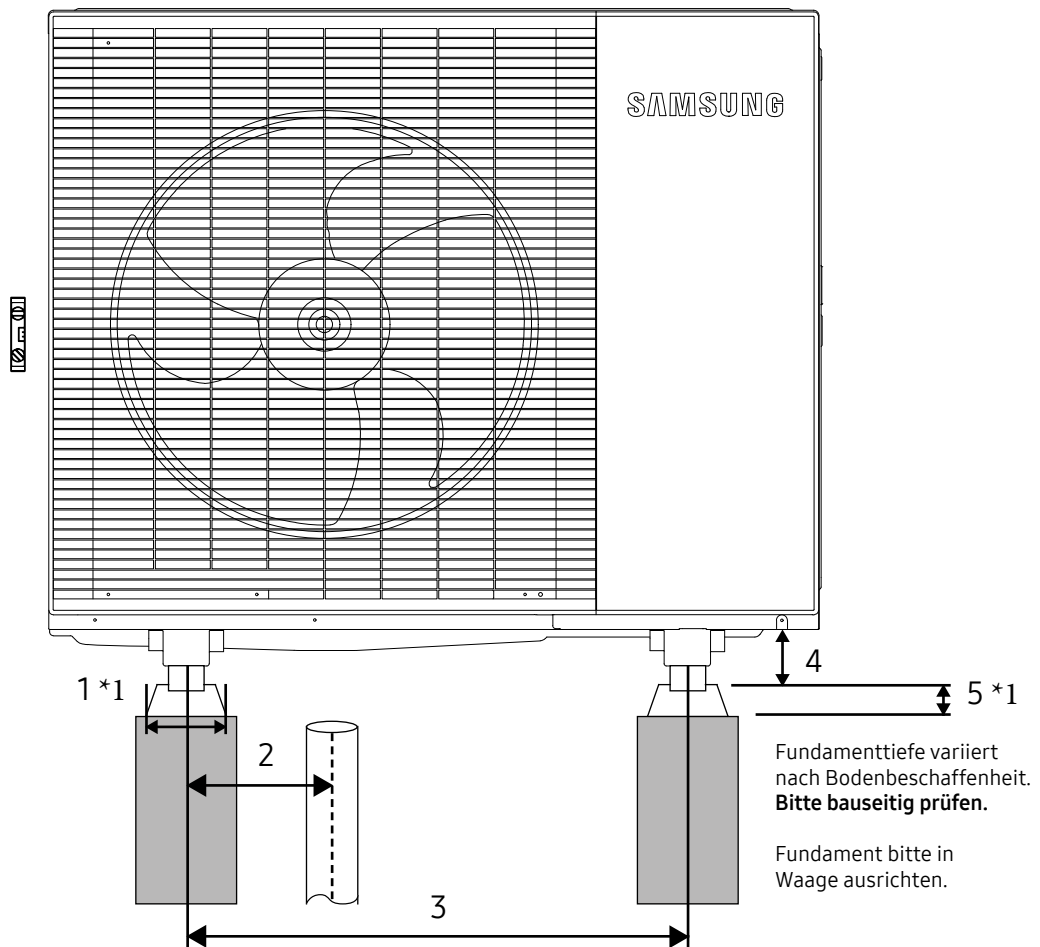

MTF-MS-753 \*1  
Fix it Dämpfungssockel

Mono HT R-290	1 *1	2	3	4	5 *1	Gewicht
AE050CXYDEK/EU	180 mm.	185 mm.	650 mm.	45 mm.	95 mm.	86,0 kg
AE080CXYDEK/EU	180 mm.	185 mm.	650 mm.	45 mm.	95 mm.	98,0 kg
AE080CXYDGK/EU	180 mm.	185 mm.	650 mm.	45 mm.	95 mm.	98,0 kg
AE120CXYDGK/EU	180 mm.	200 mm.	790 mm.	45 mm.	95 mm.	140,0 kg
AE160CXYDGK/EU	180 mm.	200 mm.	790 mm.	45 mm.	95 mm.	140,0 kg


# Mono HT R290 Fundamentplan

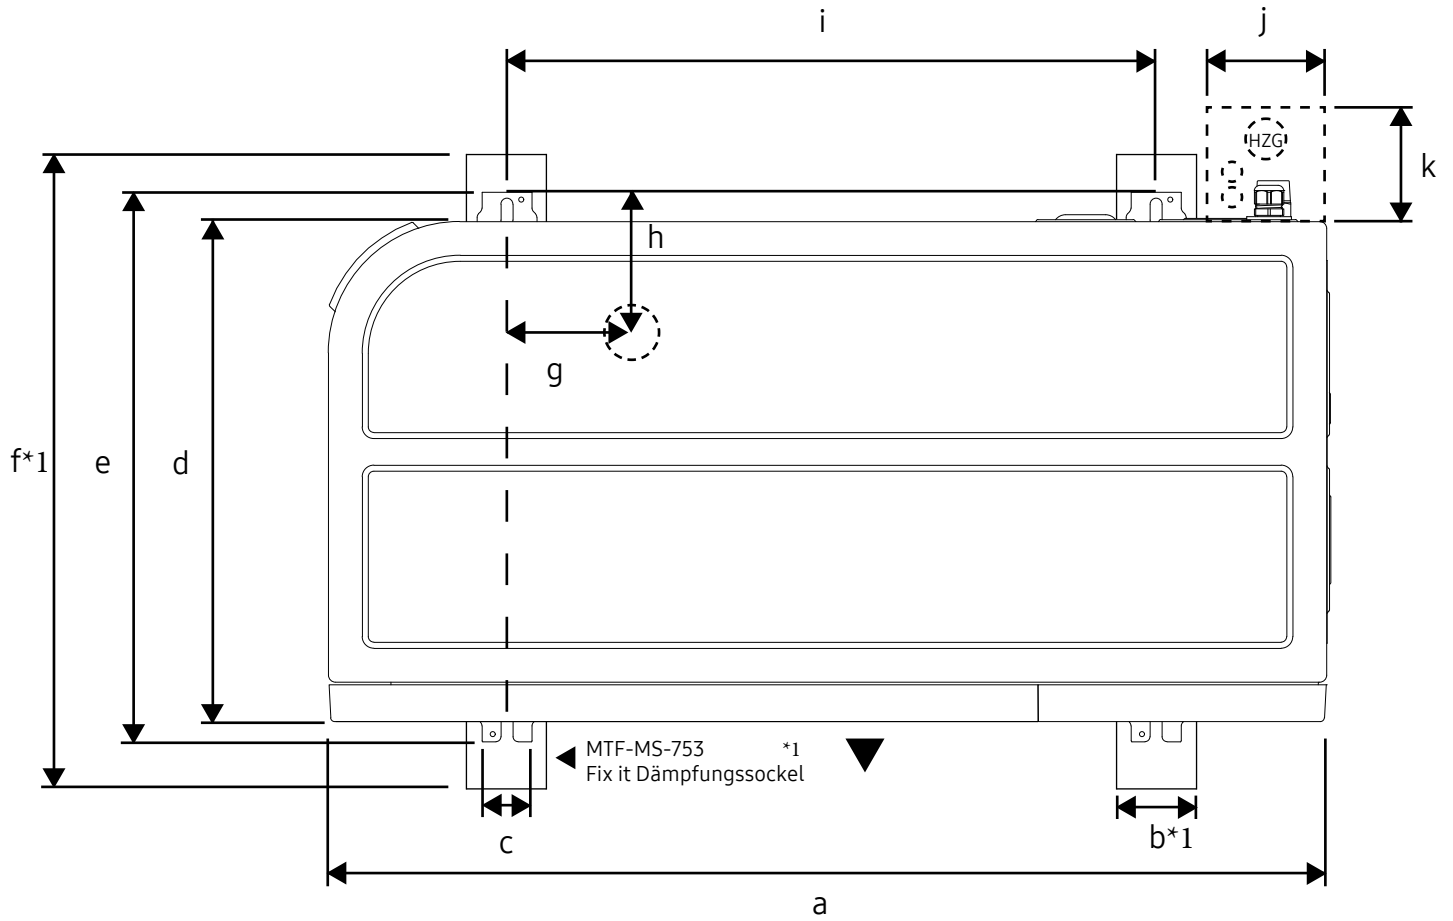

## Zubehör MTF - Kubus

Mono HT R-290	a	b*1	c	d	e	f*1	g	h	i	j	k
AE050CXYDEK/EU	998 mm.	180 mm.	60 mm.	500 mm.	550 mm.	1000 mm.	185 mm.	100 mm.	650 mm.	230 mm.	250 mm.
AE080CXYDEK/EU	998 mm.	180 mm.	60 mm.	500 mm.	550 mm.	1000 mm.	185 mm.	100 mm.	650 mm.	230 mm.	250 mm.
AE080CXYDGK/EU	998 mm.	180 mm.	60 mm.	500 mm.	550 mm.	1000 mm.	185 mm.	100 mm.	650 mm.	230 mm.	250 mm.
AE120CXYDGK/EU	1270 mm.	180 mm.	60 mm.	530 mm.	550 mm.	1000 mm.	200 mm.	100 mm.	790 mm.	185 mm.	250 mm.
AE160CXYDGK/EU	1270 mm.	180 mm.	60 mm.	530 mm.	550 mm.	1000 mm.	200 mm.	100 mm.	790 mm.	185 mm.	250 mm.

# Mono HT R290 Fundamentplan

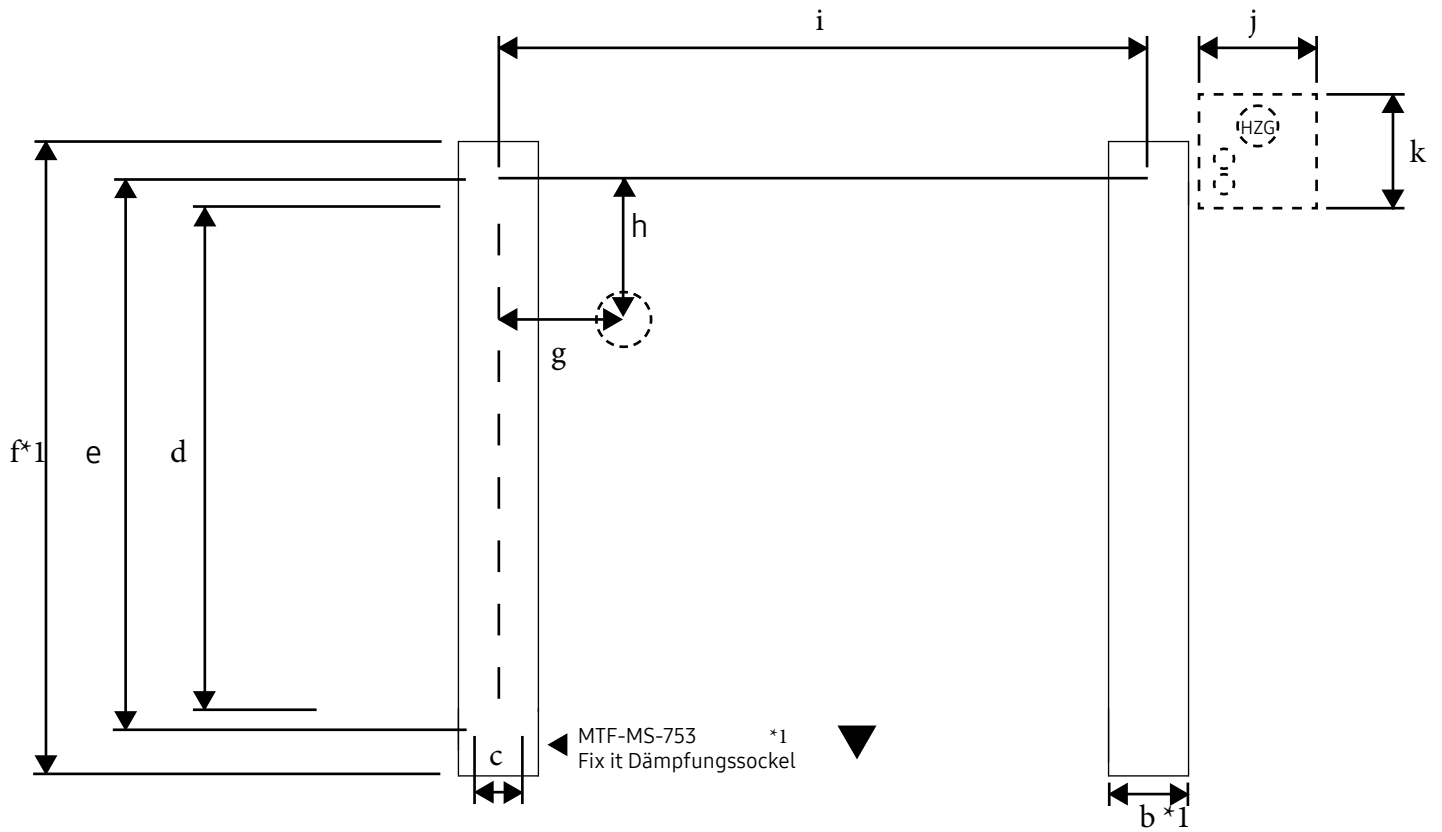

## Zubehör MTF - Kubus

Mono HT R-290	a	b*1	c	d	e	f*1	g	h	i	j	k
AE050CXYDEK/EU	998 mm.	180 mm.	60 mm.	500 mm.	550 mm.	1000 mm.	185 mm.	100 mm.	650 mm.	230 mm.	250 mm.
AE080CXYDEK/EU	998 mm.	180 mm.	60 mm.	500 mm.	550 mm.	1000 mm.	185 mm.	100 mm.	650 mm.	230 mm.	250 mm.
AE080CXYDGK/EU	998 mm.	180 mm.	60 mm.	500 mm.	550 mm.	1000 mm.	185 mm.	100 mm.	650 mm.	230 mm.	250 mm.
AE120CXYDGK/EU	1270 mm.	180 mm.	60 mm.	530 mm.	550 mm.	1000 mm.	200 mm.	100 mm.	790 mm.	185 mm.	250 mm.
AE160CXYDGK/EU	1270 mm.	180 mm.	60 mm.	530 mm.	550 mm.	1000 mm.	200 mm.	100 mm.	790 mm.	185 mm.	250 mm.