

EAN: 4015474261730  
[static.hansa.com/55302203](http://static.hansa.com/55302203)



- Waschtisch
- Einhebelmischer, Seitenbedient
- Standmontage
- Chrom
- Schwenkbarer Auslauf
- PCA® konstante Durchflussleistung unabhängig vom Fließdruck, CACHÉ® Strahlregler, ohne Mundstück direkt in den Armaturenauslauf geschraubt
- Hebel mit W+K-Kennzeichnung, Einhandbedienhebel/Griff
- Ablaufgarnitur mit Zugstange
- ø 2.5 Steuerpatrone mit keramischen Dichtscheiben zur Wassermengen- und Temperatureinstellung
- Anschluss über flexible Druckschläuche
- Armaturenkörper aus entzinkungsbeständigem Messing (DZR)

## Technische Daten

### Durchflusseigenschaften

Durchfluss bei 3 bar (mit Durchflussregler) **6.0 l/min**

### Technische Eigenschaften

DN-Größe (Nennmaß) **DN15**  
 Warmwasserversorgung **max. +80°C**  
 Arbeitsdruck **0.5-10 bar**  
 Anschlussgröße **G3/8**  
 Projection **116 mm**  
 Werkstoff **Messing**




### Vorschriften

EN Standard **EN 817**  
 Geräuschklasse **I (ISO 3822)**

### Zulassungen und Deklarationen

ABP **P-IX 29922/10**

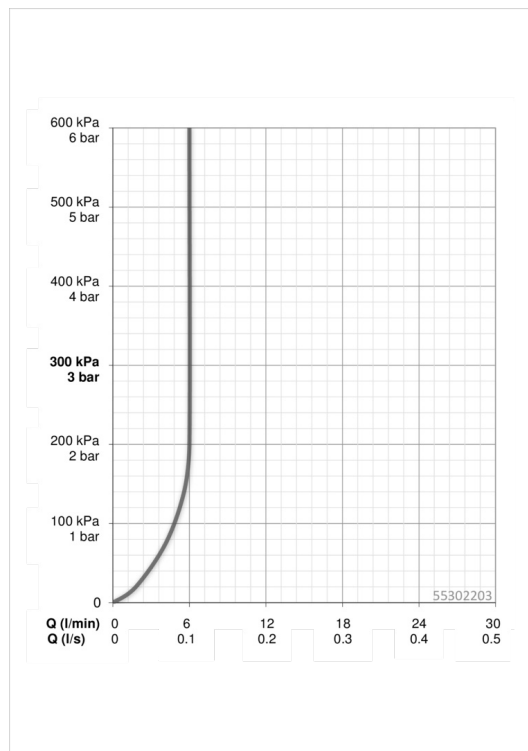



**Web:** [www.unidomo.de](http://www.unidomo.de)

**Telefon:** 04621- 30 60 89 0

**Mail:** [info@unidomo.com](mailto:info@unidomo.com)

**Öffnungszeiten:** Mo.-Fr. 8:00-17:00 Uhr

**VIESSMANN**



 **Vaillant**

**WOLF**

 **JUNKERS**  **BOSCH**

 **remeha**


 **DAIKIN**

**ROTEX**  
a member of DAIKIN group



-  Individuelle Beratung
-  Kostenloser Versand
-  Hochwertige Produkte

-  Komplettpakete
-  Über 15 Jahre Erfahrung
-  Markenhersteller

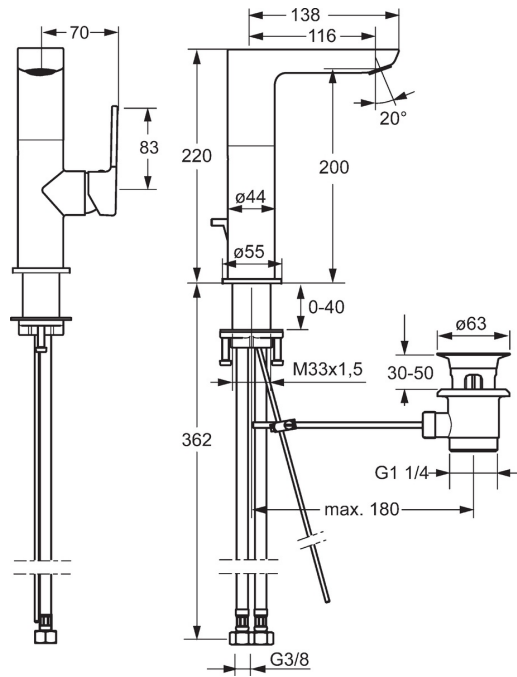

This exploded view diagram illustrates the components of a kitchen faucet assembly. The parts are numbered as follows:

- 1:** The main faucet body, including the spout and the base mounting plate.
- 2:** A decorative cap or seal for the base.
- 3:** A decorative ring or seal for the base.
- 4:** A small cylindrical component, likely a pin or a small seal.
- 5:** The main body of the faucet, including the spout and the base.
- 6:** The faucet handle, which is shown in two positions (up and down).
- 6.1:** A small cylindrical component, likely a pin or a small seal.
- 6.2:** A small cylindrical component, likely a pin or a small seal.
- 6.3:** A small cylindrical component, likely a pin or a small seal.
- 6.4:** A small cylindrical component, likely a pin or a small seal.
- 6.7:** A small cylindrical component, likely a pin or a small seal.
- 7:** A long, thin rod or pin, likely a screw or a pin.
- 8:** A decorative ring or seal for the base.
- 9:** A decorative ring or seal for the base.
- 10:** A decorative ring or seal for the base.

|      | <b>Name</b>                        | <b>Art.-Nr.</b> |
|------|------------------------------------|-----------------|
| 1    | Hebel, 2,5                         | 59914001        |
| 1.1  | Schraube, M5x8, SW2,5              | 59904755        |
| 1.3  | Blindstopfen                       | 59913762        |
| 2    | Abdeckkappe                        | 59913957        |
| 3    | Gegenmutter, M32x1, SW24           | 59913958        |
| 4    | Kartusche, 2,5                     | 59913914        |
| 5.1  | Zugstange mit Knopf                | 59913959        |
| 5.3  | O-Ring, 35x2,5                     | 59905020        |
| 5.7  | Befestigungssatz                   | 59913371        |
| 5.8  | Anschlußschlauch, L=430, G3/8-M8x1 | 59913964        |
| 5.9  | O-Ring, 6x1,4                      | 59913266        |
| 5.10 | Dichtung, 9,5x14,4x2               | 59912551        |
| 6    | Auslauf                            | 59914023        |
| 6.1  | Luftsprudler, M18.5x1, TJ          | 59913366        |
| 6.2  | Befestigungsschraube, M4x8         | 59913989        |
| 6.3  | Schlüssel für Luftsprudler, M18.5  | 59913367        |
| 6.4  | Montagering für Luftsprudler       | 59913654        |
| 6.6  | Schraube, M4x7                     | 59902075        |
| 6.7  | Dichtungs-Kit                      | 59911884        |
| 7    | Ablaufgarnitur                     | 59911441        |
| 8    | Rosette, d 55 mm                   | 59913963        |